






ALU


Prisma Architectural Design

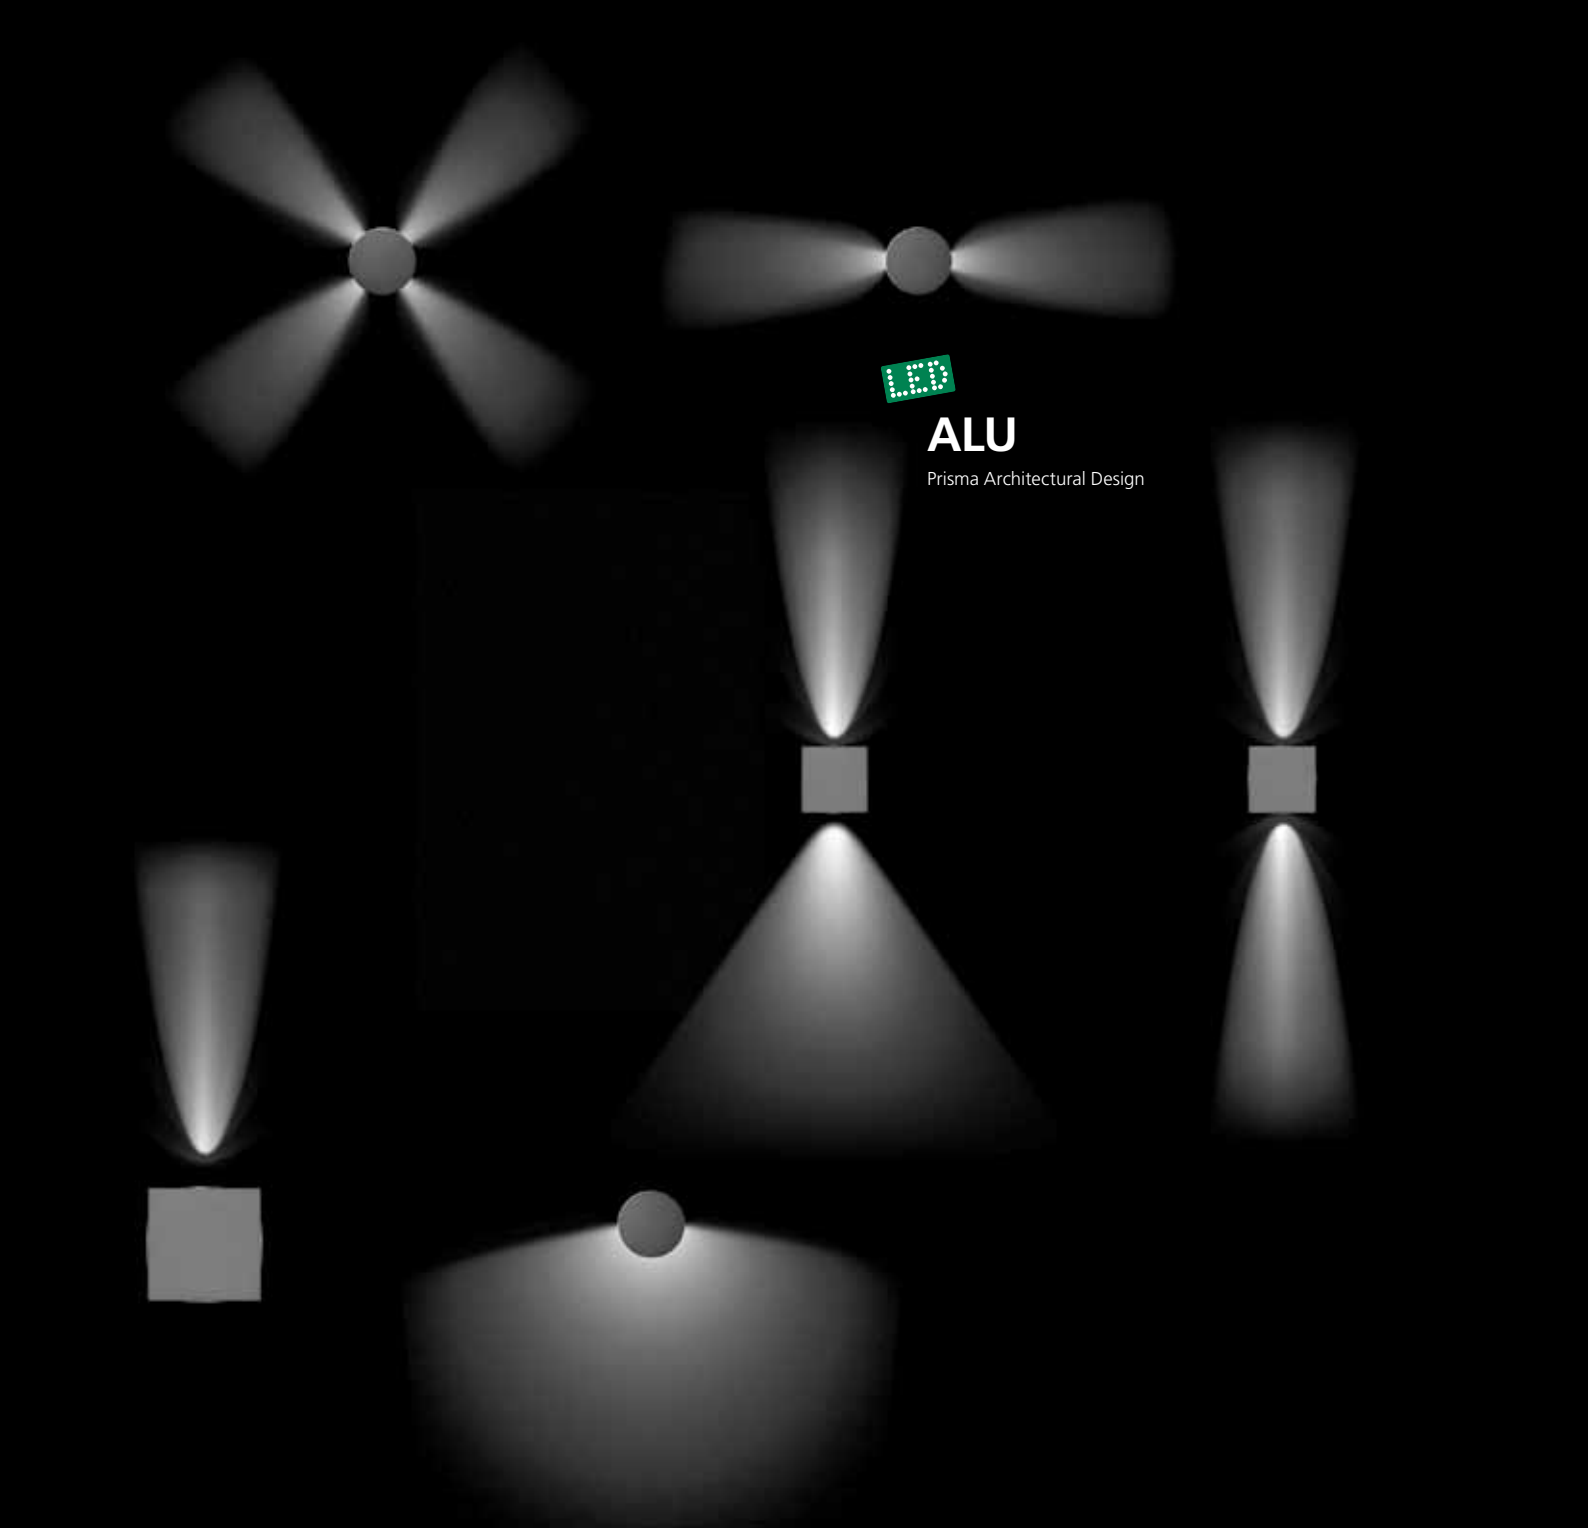


ALU ROUND



ALU SQUARE



ALU 1 - 2 - 4
ALU 1 - 2 - 4 220-240



ALU WALL

Comprehensive range of small indoor and outdoor LED fittings, featuring wall mounted, in-ground, and pole mounted versions. The wide range of wall mounted fittings are available as single or double emission, with screens for directed emission and versions with lenses that create light beams with different widths. Anodised aluminium body finished painted black or grey.

The ALU 220-240 versions are complete with integral driver / transformer and offered with various lens options.



With the ALU and ALU LINEAR versions, customisable beam combinations can be created.

A special tool is provided, as an accessory with the lenses, for easy installation.


All fittings are equipped with either high power white LED's; 3000 K (warm white) or 6000 K (cool white).

The ALU series is suitable for marking outdoor paths or for accent lighting of architectural features and buildings.

The combination of lenses and beam options bring together a range of products that provide an aesthetic homogenous lighting solution.

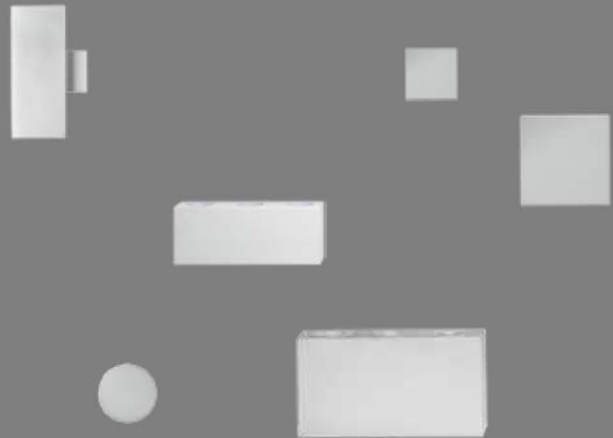


ALU LINEAR



NEW


ALU LINEAR 220-240




ALU INGROUND



Please contact us to check availability on the products marked with this symbol.



h max 0,53 m
h min 0,28 m

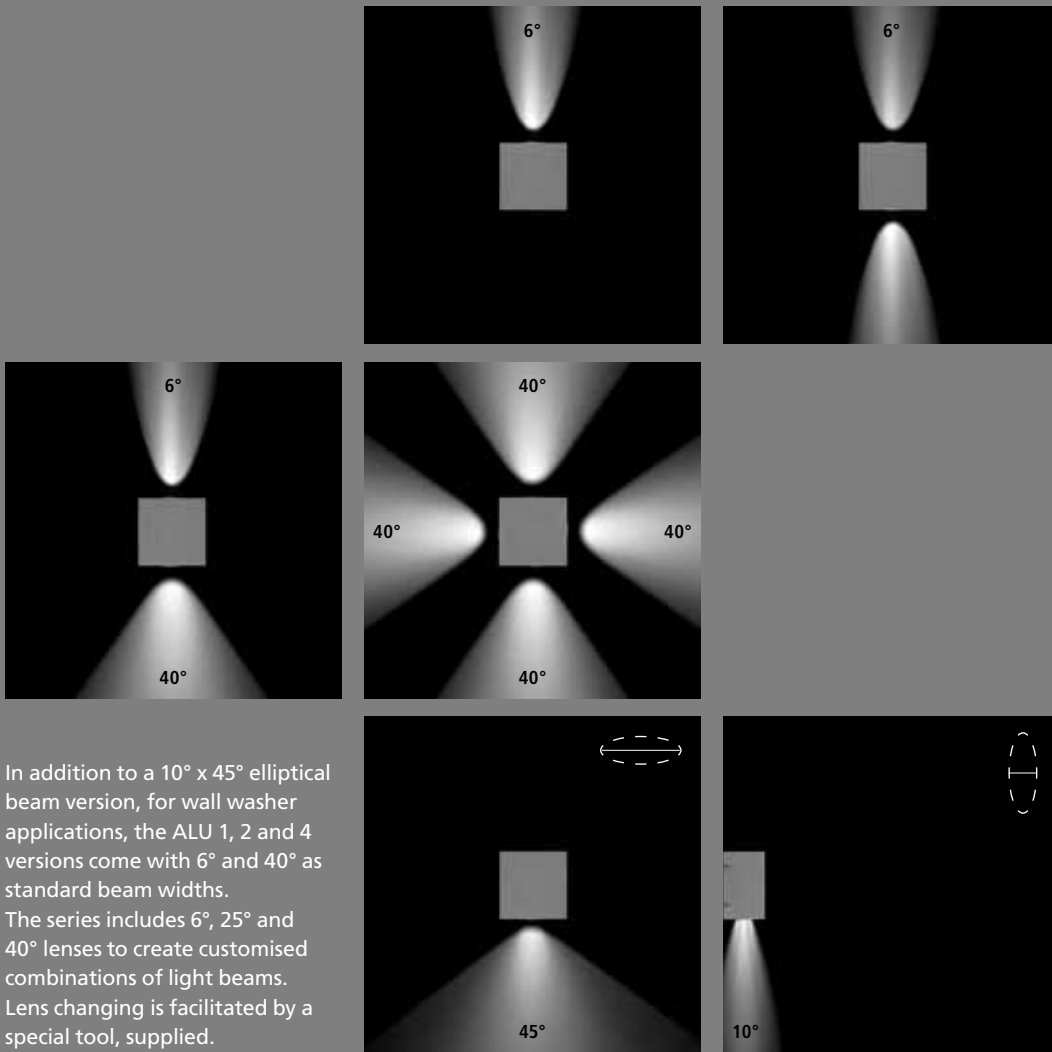


In addition to a 10° x 45° elliptical beam version, for wall washer applications, the ALU 1, 2 and 4 versions come with 6° and 40° as standard beam widths. The series includes 6°, 25° and 40° lenses to create customised combinations of light beams. Lens changing is facilitated by a special tool, supplied.


The ALU 1, 2 and 4 versions come with lenses that provide light beams of different widths. The beams can be positioned in any direction. All fixtures are available with warm and cool white light.




The 220-240 versions are complete with built-in driver for direct connection to the mains supply.

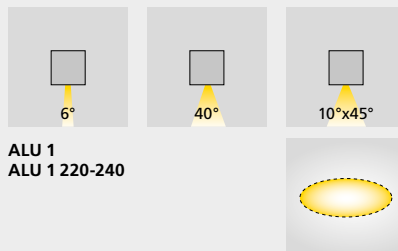



ALU 1
ALU 1 220-240




ALU 2 90°
ALU 2 90° 220-240

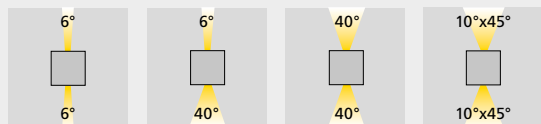

ALU 2 180°
ALU 2 180° 220-240




ALU 4
ALU 4 220-240








The ALU LINEAR 220-240 version is complete with built-in driver for direct connection to the mains supply.

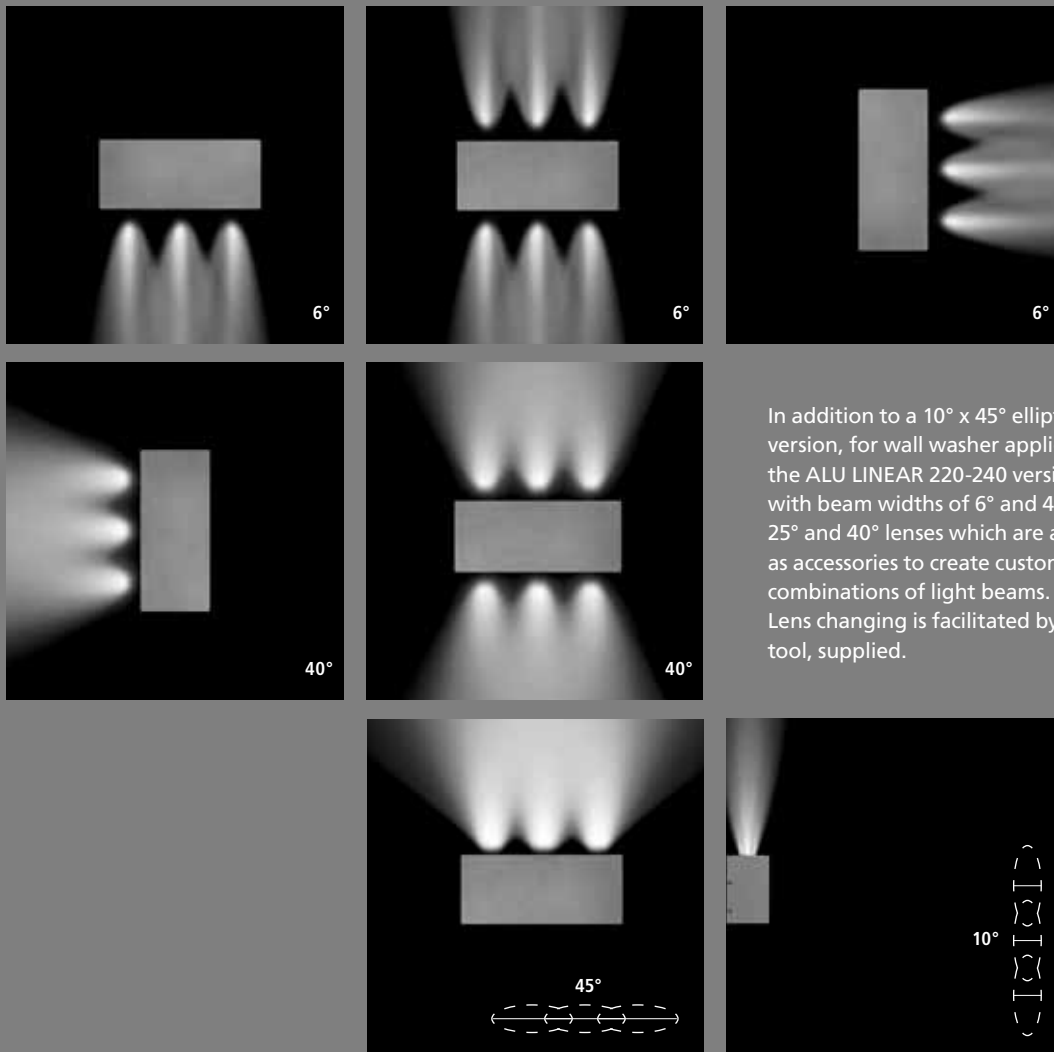

The ALU LINEAR 220-240 version is a single or double emission wall-mounted fitting, with lenses that generate three or six light beams of various widths. The beam can be positioned in any direction. This version is also available with warm and cool white light.

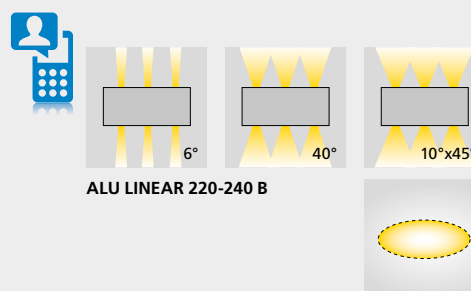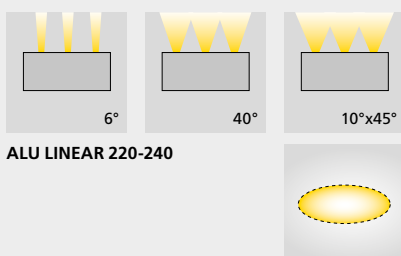

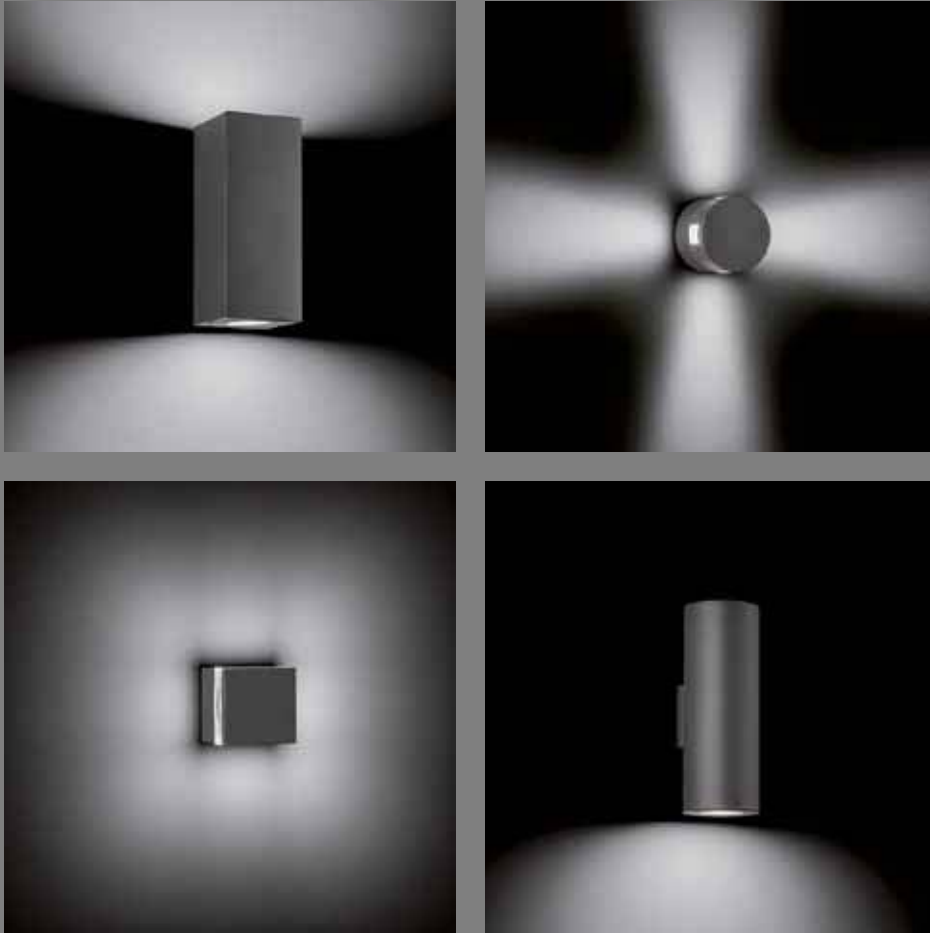

The Alu Round and Alu Square versions are available with various types of diffusers to generate different light displays. The Alu Wall and Alu Linear versions are available with both single and double emission. Both warm and cool white light are available for all fittings.



GOLFO GABELLA - RESIDENTIAL COMPLEX - MACCAGNO (ITALY)




ALU ROUND

- ALU ROUND FULL
- ALU ROUND TRIM
- ALU ROUND SHADE
- ALU ROUND SIDE 1
- ALU ROUND SIDE 1 NB
- ALU ROUND SIDE 180° NB
- ALU ROUND SIDE 4



Wall mounted, class III LED luminaires.



- Silver or black anodised aluminum housing
 - Rings and screens in black or silver anodised aluminum
 - Diffusers in frosted polycarbonate
 - All versions are available with white LEDs, 3000 K and 6000 K
 - We recommend using a continuous current power supply of 700 mA.
- Power supply accessories not included with the product.



lampholder	W	ILCOS	colour	class	IP	Kelvin	Cos φ ≥ 0,9	EEL	code	notes
ALU ROUND FULL										
Power LED										
1 LED - 2,2 W		BK4+WHL	III	65	• 6000	IK10 20J xx9			307242	
1 LED - 2,2 W		BK4+WHL	III	65	• 3000	IK10 20J xx9			307237	
1 LED - 2,2 W		GR4+WHL	III	65	• 6000	IK10 20J xx9			307232	
1 LED - 2,2 W		GR4+WHL	III	65	• 3000	IK10 20J xx9			307227	
ALU ROUND TRIM										
Power LED										
1 LED - 2,2 W		BK4+WHL	III	65	• 3000	IK10 20J xx9			307239	
1 LED - 2,2 W		BK4+WHL	III	65	• 6000	IK10 20J xx9			307244	
1 LED - 2,2 W		GR4+WHL	III	65	• 3000	IK10 20J xx9			307229	
1 LED - 2,2 W		GR4+WHL	III	65	• 6000	IK10 20J xx9			307234	
ALU ROUND SHADE										
Power LED										
1 LED - 2,2 W		BK4+WHL	III	65	• 3000	IK10 20J xx9			307238	
1 LED - 2,2 W		BK4+WHL	III	65	• 6000	IK10 20J xx9			307243	
1 LED - 2,2 W		GR4+WHL	III	65	• 3000	IK10 20J xx9			307228	
1 LED - 2,2 W		GR4+WHL	III	65	• 6000	IK10 20J xx9			307233	


If information about Kelvin degrees is provided, this means that the lamp is included.

description	colour	code
Driver kit with current 220/240 V 700 mA 6 W		310297
Driver kit with current 220/240 V 700 mA 9 W		310298
Driver kit with current 220/240 V 700 mA 2/16 W		310222
Driver kit with current 220/240 V 700 mA 30 W		310299

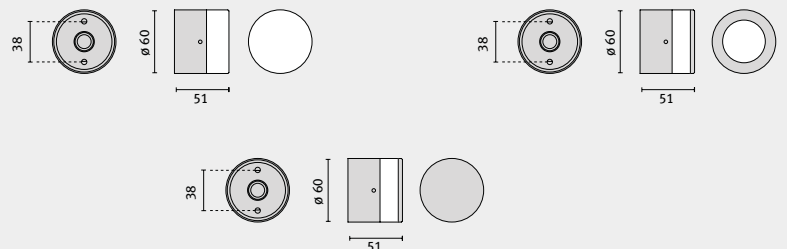



lampholder W ILCOS colour class IP Kelvin $\cos \phi \geq 0,9$ EEI code notes

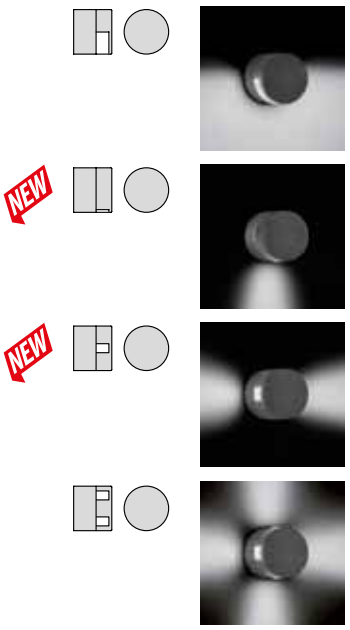

ALU ROUND SIDE 1

Power LED		ILCOS	colour	class	IP	Kelvin	notes	code
1 LED - 2,2 W	BK4+WHL	III		65		• 6000	IK10 20J xx9	307245
1 LED - 2,2 W	BK4+WHL	III		65		• 3000	IK10 20J xx9	307240
1 LED - 2,2 W	GR4+WHL	III		65		• 6000	IK10 20J xx9	307235
1 LED - 2,2 W	GR4+WHL	III		65		• 3000	IK10 20J xx9	307230

ALU ROUND SIDE 1 NB

Power LED 220/240 V 50/60 Hz		ILCOS	colour	class	IP	Kelvin	notes	code
1 LED - 2,2 W	BK4+WHL	III		65		• 6000	IK10 20J xx9	307422
1 LED - 2,2 W	BK4+WHL	III		65		• 3000	IK10 20J xx9	307421
1 LED - 2,2 W	GR4+WHL	III		65		• 3000	IK10 20J xx9	307419
1 LED - 2,2 W	GR4+WHL	III		65		• 6000	IK10 20J xx9	307420





ALU ROUND SIDE 180° NB

Power LED 220/240 V 50/60 Hz		ILCOS	colour	class	IP	Kelvin	notes	code
1 LED - 2,2 W	BK4+WHL	III		65		• 3000	IK10 20J xx9	307425
1 LED - 2,2 W	BK4+WHL	III		65		• 6000	IK10 20J xx9	307426
1 LED - 2,2 W	GR4+WHL	III		65		• 6000	IK10 20J xx9	307424
1 LED - 2,2 W	GR4+WHL	III		65		• 3000	IK10 20J xx9	307423

ALU ROUND SIDE 4

Power LED		ILCOS	colour	class	IP	Kelvin	notes	code
1 LED - 2,2 W	BK4+WHL	III		65		• 6000	IK10 20J xx9	307246
1 LED - 2,2 W	BK4+WHL	III		65		• 3000	IK10 20J xx9	307241
1 LED - 2,2 W	GR4+WHL	III		65		• 6000	IK10 20J xx9	307236
1 LED - 2,2 W	GR4+WHL	III		65		• 3000	IK10 20J xx9	307231

If information about Kelvin degrees is provided, this means that the lamp is included.



All fixtures can be installed and positioned any direction.

