



ARCHIS 14 mini version is part of a comprehensive range of ARCHIS (mini, midi and maxi) suspended pendants. ARCHIS are manufactured from high quality materials with a simple clean design offering a wide range of reflector distributions and styles. Suitable for commercial and retail applications, showrooms, atriums, halls and general area lighting. ARCHIS comprises three parts; (1) gear / wiring box, (2) reflector/refractors and (3) covers (optional). Each individual part has its own product number which must be ordered together to form a complete fitting.

Gear / wiring box in aluminium finished
Aluminium reflectors smooth or faceted.
Refractors linear prismatic PMMA
Frosted diffuser or clear.

- Die cast aluminium housing and chassis finished.
- Wiring terminal block inside aluminium housing with cable gland entry for Ø5 to 8mm flexible cable, 110-240V, 50/60Hz.
- Supplied complete with 1.5m steel wire suspension cable. Fitting is also suitable to be suspended by M13x1 conduit (not included). Aluminium ceiling rose accessory A0256.




BOX ARCHIS 14


Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
E27	Max 160W	IAA-FBT-FBG-QB			94	I				01005894	
G24d-2	18W	FSQ			94	I	B2	C		01005994	!

! Mains supply voltage: 230V 50Hz.



REFLECTORS - REFRACTORS - DIFFUSERS




Code	Denomination	Description	Note
14440994	A0119/34D	34D Smooth surface aluminium reflector.	■
14004710	A0176/34PR	34PR faceted surface aluminium reflector for greater visual comfort.	■



Code	Denomination	Description	Note
14004120	A0173/PMMA	Acrylic (PMMA) linear prismatic clear refractor Ø315 and Ø410mm,	□
14004320	A0174/PMMA	complete with aluminium fixing plate finished.	□



Code	Denomination	Description	Note
14016420	A0224	Acrylic diffuser with special microspheres for frosted appearance.	□



Code	Denomination	Description	Note
14016520	A0225	Polycarbonate clear diffuser (V2 UL94-850°).	□

- Minimum order 10 pcs. or multiple thereof.
- Minimum order 6 pcs. or multiple thereof.

						IK 08 6J								
CLASS I		94		IP 20				QB max 160W HWL / ML	IAA max 100W INC.	FBG max 23W DULUX-EL PLE-D	HEGT max 150W HALOLUX-T32	FBT 23W DULUX-EL PLE-T	FBG 18W PLE-C	FSQ 18W DULUX-D PLE-C

RECOMMENDED LAMP AND REFLECTOR / REFRACTOR COMBINATIONS TABLE.

	A0119/34D A0176/34PR	A0173/31 PMMA	A0174/41 PMMA	A0224	A0225

Recommended.
 Not recommended.

ACCESSORIES



Code	Denomination	Description	Note
14016694	A0226	Aluminium anti-glare louvre finished for A0225 clear polycarbonate diffuser.	<input type="checkbox"/>
14028320	A0256	Ceiling rose finished aluminium grey with galvanized steel support plate and 5x2.5mm ² terminal block.	<input type="checkbox"/>
14009020	A0179/AL	Toughened clear glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR. IP54 lamp chamber.	<input type="checkbox"/>
14020320	A0179/AL Soft (x A0119/34D-A0176/34PR)	Toughened frosted glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR. IP54 lamp chamber.	<input type="checkbox"/>
14005120	A0178/PMMA (x A0173/PMMA)	Acrylic cover with stainless steel ring. IP40 lamp chamber.	<input type="checkbox"/>
14005420	A0180/PMMA (x A0174/PMMA)	Acrylic cover with stainless steel ring. IP40 lamp chamber.	<input type="checkbox"/>

Minimum order 6 pcs. or multiple thereof.



ARCHIS 15 midi versions are part of a comprehensive range of ARCHIS (mini, midi and maxi) suspended pendants. ARCHIS are manufactured from high quality materials with a simple clean design offering a wide range of reflector distributions and styles. Suitable for commercial and retail applications, showrooms, atriums, halls and general area lighting. ARCHIS comprises three parts; (1) gear / wiring box, (2) reflector/refractors and (3) covers (optional). Each individual part has its own product number which must be ordered together to form a complete fitting.

- Gear / wiring box in aluminium finished
- Aluminium reflectors smooth or faceted.
- Refractors linear prismatic PMMA
- Frosted diffuser or clear.

- Die cast aluminium housing and gear tray finished.
- Wiring terminal block inside aluminium housing with cable gland entry for Ø5-8mm flexible cable.
- Supplied complete with 1.5m steel wire suspension cable.

Aluminium ceiling rose accessory A0256.



BOX ARCHIS 15






Lampholder	W	Icos	°K	Optic	Colour	Class	Wiring	EEL=	Coefp ≥ 0,9	Code	Notes
G12	35W	MT			94	I		CR	•	05100494	! [E] [E]
G12	70W	MT			94	I		CR	•	05100594	! [E] [E]
E27	70W	ME-MT			94	I		CR	•	05100694	! [E] [E]
G12	150W	MT			94	I		CR	•	05185694	! [E] [E]
E27	150W	ME			94	I		CR	•	05245894	! [E] [E]
G12	35W	MT			94	I		ETRC	•	05100794	[E] [E] [E]
G12	70W	MT			94	I		ETRC	•	05100894	[E] [E] [E]
E27	70W	ME-MT			94	I		ETRC	•	05100994	[E] [E] [E]
GX24q-3/4	26÷42W	FSM			94	I	A2	ETRC	•	05101094	[E] [E] [E]
GX24q-5	57W	FSM			94	I	A2	ETRC	•	05101194	[E] [E] [E]

[E] Complete with electronic ballast non dimmable 220-240v 50/60hz.

! Mains supply voltage: 230V 50Hz.

[E] Specials available on request (emergency versions, colours options, and special voltage etc).

REFLECTORS - REFRACTORS - DIFFUSERS



Code	Denomination	Description	Note
14440994	A0119/34D	34D Smooth surface aluminium reflector.	■
14004710	A0176/34PR	34PR faceted surface aluminium reflector for greater visual comfort.	■

Code	Denomination	Description	Note
14004120	A0173/PMMA	Acrylic (PMMA) linear prismatic clear refractor Ø315 and Ø410mm,	□
14004320	A0174/PMMA	complete with aluminium fixing plate finished.	□

Code	Denomination	Description	Note
14016420	A0224	Acrylic diffuser with special microspheres for frosted appearance.	□

Code	Denomination	Description	Note
14016520	A0225	Polycarbonate clear diffuser (V2 UL94-850°).	□

■ Minimum order 10 pcs. or multiple thereof.

□ Minimum order 6 pcs. or multiple thereof.

						IK 08 6J						
--	--	--	--	--	--	---------------------	--	--	--	--	--	--

CLASS I		94	IP 20							MT max 150W CDM-T/HCI-T HQI-T	ME max 150W CDO-ET/HCI-EP HQI-E	MT max 70W CDO-TT HCI-TT	FSQ max 70W DULUX-T/E DULUX-D/E PL-T
----------------	--	-----------	--------------	--	--	--	--	--	--	---	---	--	---

 Box ARCHIS 15 100 Ø150	 H Max Ø Max	<table border="1"> <tr> <th>Box ARCHIS 15</th> <th>H Max</th> <th>Ø Max</th> </tr> <tr> <td>+A0119 / 34D</td> <td>410</td> <td>Ø340</td> </tr> <tr> <td>+A0176 / 34PR</td> <td>410</td> <td>Ø340</td> </tr> <tr> <td>+A0173 / PMMA</td> <td>360</td> <td>Ø315</td> </tr> <tr> <td>+A0174 / PMMA</td> <td>460</td> <td>Ø410</td> </tr> <tr> <td>+A0224</td> <td>380</td> <td>Ø310</td> </tr> </table>	Box ARCHIS 15	H Max	Ø Max	+A0119 / 34D	410	Ø340	+A0176 / 34PR	410	Ø340	+A0173 / PMMA	360	Ø315	+A0174 / PMMA	460	Ø410	+A0224	380	Ø310	 Max Ø7 H03VV-F 3G0,75 3x2,5mm²	 IP 20 IP 40
Box ARCHIS 15	H Max	Ø Max																				
+A0119 / 34D	410	Ø340																				
+A0176 / 34PR	410	Ø340																				
+A0173 / PMMA	360	Ø315																				
+A0174 / PMMA	460	Ø410																				
+A0224	380	Ø310																				

RECOMMENDED LAMP AND REFLECTOR / REFRACTOR COMBINATIONS TABLE.

	A0119/34D A0176/34PR	A0119/34D A0176/34PR + A0120/A	A0173/31 PMMA	A0173/31 PMMA + A0178/PMMA	A0174/41 PMMA	A0174/ 41 + A0180/PMMA	A0224	A0225

Metal Halide lamps must be used with a toughened glass cover. (Except •HQI-E max 150W •HCI-EP "open" type protected lamps).

Complete with electronic ballast non dimmable 220-240v 50/60hz.

Recommended.

Not recommended

ACCESSORIES



Code	Denomination	Description	Packing
14028320	A0256	Ceiling rose finished aluminium grey with galvanized steel support plate and 5x2.5mm² terminal block.	
14076620	A0394	4 metre galvanised steel wire suspension cable for ARCHIS 15/16.	
14008820	A0120/AL - 34 (x A0119/34D - x A0176/34PR)	Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR. IP40 lamp chamber.	
14020220	A0120/AL - 34 Soft (x A0119/34D - x A0176/34PR)	Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR. IP40 lamp chamber.	
14005120	A0178/PMMA (x A0173/PMMA)	Acrylic cover with stainless steel ring. IP40 lamp chamber.	
14005420	A0180/PMMA (x A0174/PMMA)	Acrylic cover with stainless steel ring. IP40 lamp chamber.	

Minimum order 6 pcs. or multiple thereof.



ARCHIS 16 maxi version is part of a comprehensive range of ARCHIS (mini, midi and maxi) suspended pendants. ARCHIS are manufactured from high quality materials with a simple clean design offering a wide range of reflector distributions and styles. Suitable for commercial and retail applications, showrooms, atriums, halls and general area lighting. ARCHIS comprises three parts; (1) gear / wiring box, (2) reflector/refractors and (3) covers (optional). Each individual part has its own product number which must be ordered together to form a complete fitting.

- Gear / wiring box in aluminium finished
- Aluminium reflectors smooth or faceted.
- Refractors linear prismatic PMMA
- Frosted diffuser or clear.

- Die cast aluminium housing and gear tray finished.
 - Wiring terminal block inside aluminium housing with cable gland entry for max. Ø11mm flexible cable.
 - Supplied complete with 1.5m steel wire suspension cable.
- Aluminium ceiling rose accessory A0256.




BOX ARCHIS 16

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL=	Cost ≥ 0,9	Code	Notes
E27	150W	ME			94	I		CR	•	05139794	!
E40	150W	SE-MT			94	I		CR	•	05139894	!
E40	250W	ME*			94	I		CR	•	05139994	! *For lamp HPI-BU plus
E40	250W	SE-ME			94	I		CR	•	05140194	!
E40	400W	SE-ME			94	I		CR	•	05140494	!


! Mains supply voltage: 230V 50Hz.

Auxiliary lamp facility, not ETRC versions (max 250W B15d tungsten halogen lamp - not included). Provides instant light during run up of discharge lamp. Available on request as a factory fitted accessory when ordered with fitting. Specials available on request (emergency versions, colours options, and special voltage etc.).


REFLECTORS - REFRACTORS - DIFFUSERS



Code	Denomination	Description	Note
14440994	A0119/34D	Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	■



Code	Denomination	Description	Note
14442994	A0119/48I	Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	■



Code	Denomination	Description	Note
14004320	A0174/PMMA	Linear prismatic clear methacrylate refractor.	□
14004520	A0175/PMMA	Downward light distribution with refracted upward light component. Complete with fixing plate finished aluminium grey.	□



- Minimum order 10 pcs. or multiple thereof.
- Minimum order 6 pcs. or multiple thereof.

						IK 08 8J		max 11kg					
CLASS I		94		IP 20					MT max 400W	ME max 400W	ST max 400W	SE max 400W	FSQ max 120W
Box ARCHIS 16 225 Ø200			 H Max			Box ARCHIS 16	H Max	Ø Max	 PG13,5 Ø6-Ø12				
						+A0119 / 48D	530	Ø480	 H07RN-F 3x1				
						+A0176 / 48I	530	Ø480					
						+A0174 / PMMA	510	Ø410					
						+A0175 / PMMA	580	Ø570					
									3x2,5mm ²				


RECOMMENDED LAMP AND REFLECTOR / REFRACTOR COMBINATIONS TABLE.

	A0119/48D	A0119/48D + A0120/AL	A0174/41 PMMA	A0174/ 41 + A0180/PMMA	A0175/57 PMMA	A0175/57 + A0181/PMMA
	150W NAV-E - SON-E					
	150W HQI-E - HCI-E/P					
	150W NAV-T - SON-T					
	150W CDM-TT - HCI-TT					
	250W NAV-E - SON-E					
	250W HPI-BU					
	250W HPI-BU/P					
	250W HQI-E					
	250W HQI-E/P					
	250W NAV-T - SON-T					
	250W HQI-T					
	400W NAV-E - SON-E					
	400W HQI-E - HPI-BU					
	400W HQI-E/P - HPI-BU/P					
	400W NAV-T - SON-T					

Recommended.
 Not recommended.

Metal Halide lamps must be used with a toughened glass cover. (Except •HQI-E max 150W •HCI-EP "open" type protected lamps).

ACCESSORIES

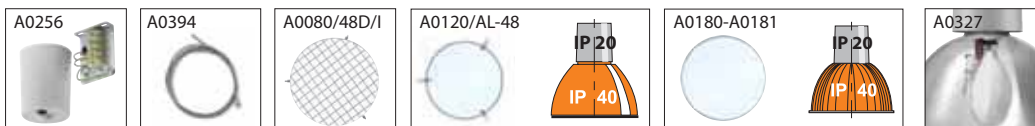

Code	Denomination	Description	Packing
14028320	A0256	Ceiling rose finished aluminium grey with galvanized steel support plate and 5x2.5mm ² terminal block.	□
14076620	A0394	4 metre galvanized steel wire suspension cable for ARCHIS 15/16.	□
14321994	A0080/48D-I	Galvanized steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48I only.	▲
14008920	A0120/AL-48	Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48I only.	□
14005420	A0180/PMMA (x A0174/41PMMA)	Acrylic (PMMA) cover. IP40 lamp chamber.	□
14005620	A0181/PMMA (x A0175/57PMMA)	Acrylic (PMMA) cover. IP40 lamp chamber.	□
14051920	A0327/16	Auxiliary lamp facility with B15d lamp holder for 250 tungsten halogen lamp (lamp not included) provides instant light during run up of the discharge lamp. Accessory A0327 to be ordered as separate item along with fitting for factory fitted option. Not available for fluorescent lamp versions.	□

□ Minimum order 6 pcs. or multiple thereof.

▲ Minimum order 5 pcs. or multiple thereof.