

# CLIPPER

design Roberto Fiorato

Wall, ceiling and post luminaire for indoor and outdoor lighting, comprising:

- Die-cast polished brass body, guard or louvre
- Pressed glass diffuser with internal pattern, internally matt
- Brass locking screws, brass cable clamp
- Polymer gasket
- Metals with natural finish surface may oxidise with age, to restore the original brightness use commercial metal polish

Messingleuchte für Wand-, Decken- und Pollermontage für Innen- und Außenbereiche, bestehend aus:

- Gehäuse, Gitter, Split oder Blende aus glänzendem Messing
- Diffusor aus gepresstem, innen mattiertem Glas
- Äußere Schrauben und Kabelverschraubung aus Messing
- Dichtungen aus Polymer
- Unbehandeltes Messing unterliegt einem natürlichen Oxidationsprozess. Mit einer herkömmlichen Metall- bzw. Messingpolitur können Sie den ursprünglichen Glanz wieder herstellen



IP 65

class I

IK06 1J xx3



IP 65

class I

IK06 1J xx3



**CLIPPER/G**

E27	max 1x75w	IAA	BR1	I	•				<b>006950</b>
<b>Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz</b>									
G24d-3	1x26w	FSQ	BR1	I	•	2700	•	$\leq B2$	<b>006956</b>


IK06 1J xx3



**CLIPPER/G EM/3P**

<b>Emergency - electronic ballast/Notbeleuchtung - EVG</b>									
G24q-2	1x18w	FSQ	BR1	I			A2÷A3	<b>3007765</b>	<b>3</b>



IK06 1J xx3



**CLIPPER SPLIT**

E27	max 1x60w	IAA	BR1	I	•				<b>006952</b>
<b>Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz</b>									
G24d-3	1x26w	FSQ	BR1	I	•	2700	•	$\leq B2$	<b>006958</b>

IK06 1J xx3



LAMPHOLDER	COLOUR CLASS	COS φ		CODE	NOTES
FASSUNG W	ILCOS FARBE KLASSE	KELVIN	≥ 0,9	EEL	BESTELLNR. BEMERKNG. EURO




**CLIPPER VISA**

E27	max 1x60w	IAA	BR1	I	•				<b>006951</b>
<b>Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz</b>									
G24d-3	1x26w	FSQ	BR1	I	•	2700	•	≤B2	<b>006957</b>

**IK06 1J xx3**

E27	E27	G24d-3
max 1x60W	1x16W Dulux EL Longlife 1x20W Philips PL-E	1x26W



**ACCESSORIES**

**Wooden post**

Outdoor post made from layered Kiefer Austrian pine, treated in the autoclave with ecological primer, comprising:

- Black painted steel flange with cataphoresis treatment
- Hollow post suitable for single or twin (back to back) luminaire mounting
- Black technopolymer junction box with 4-pole 16 mm<sup>2</sup> terminal

**Maintenance:**

As with all natural products, when exposed to the weather, the post must be maintained to ensure it retains its characteristics over time. It is advisable to renew the surface treatment periodically with an outdoor wood primer / treatment.

**Warnings:**

Rising damp encourages the damaging effect of frost and biological agents. It is therefore important to avoid direct contact between the wood and the ground.

**ZUBEHÖR**

**Holzmast**

Mast für den Aussenbereich aus mehrschichtiger, österreichischer Kiefer; umweltfreundlich druckimprägniert, bestehend aus:

- Flansch aus schwarz lackiertem Stahl mit Kataphorese-Beschichtung
- Hohler Mast zur Aufnahme von einer Leuchte oder zwei Leuchten
- Abzweigkasten aus schwarzem Technopolymer mit 4-poliger Anschlussklemme 16 mm<sup>2</sup>

**Pflegehinweis:**


Wie alle Naturprodukte, die Witterungseinflüssen ausgesetzt sind, muss der Mast entsprechend gepflegt werden, um seine Eigenschaften im Lauf der Zeit unverändert beizubehalten. Es wird empfohlen, den Mast regelmäßig mit einem handelsüblichen Imprägniermittel für Holz zu behandeln.

**Hinweis:**

Die Bodenfeuchtigkeit verstärkt die angreifende Wirkung von Frost und Witterung. Demnach den direkten Kontakt zwischen Boden und Holz vermeiden

DESCRIPTION / BESCHREIBUNG	COLOUR FARBE	CODE BESTELLNR.	EURO
----------------------------	--------------	-----------------	------

Wooden post/Holzmast		<b>000817</b>	
----------------------	--	---------------	--

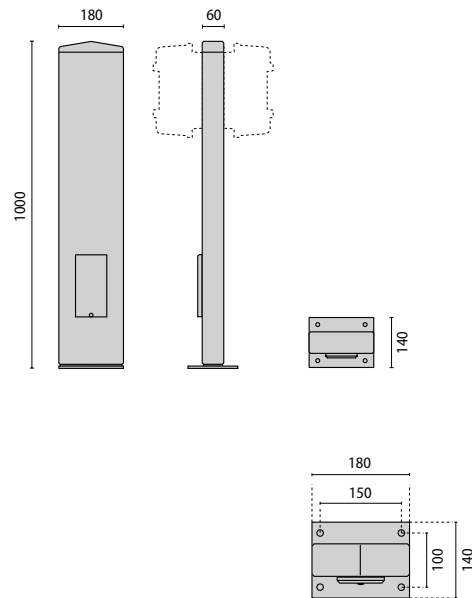

PACKAGE SIZE / VERPACKUNGSMAßE

25 x 29 x 45 cm (master x 3)

DISTANCE BETWEEN FIXING HOLES / BOHRLOCHABSTAND

