



CRICKET 16 Quick

design Silvia Paola Pennacchio



CRICKET 16 QUICK is a circular shaped range of recessed in-ground fixtures, suitable for vehicle crossings, available with different light sources, up to 50W maximum. Quick versions are supplied complete with lamps factory fitted to speed up and maintain integrity during installation. A selection of lamp colour temperatures are available in some models, with a choice of distributions to satisfy a wide variety of applications. Cricket 16 Quick is manufactured from high quality materials and designed to make installation and maintenance quick and simple.

Available in the following versions:

Cricket 16 QUICK / AL - with aluminium ring painted in anthracite-grey sablé and flat glass.
Cricket 16 QUICK / I - with stainless steel coated ring AISI 316 and flat glass.

Cricket 16 QUICK features:


- factory fitted lamps, with a selections of lamp colour temperatures and distributions,
- vertical adjustability of the lamp unit (according to the models),
- low glass temperatures (according to the models).

- Technopolymer body and outer recessing enclosure provides high corrosion resistance and stability in variable ambient temperatures.
- Tempered float safety glass (IK 09 - 16 Joule).
- Anti-ageing silicone gasket provides high flexibility and recovery to maintain IP67 rating.
- (16 QUICK / AL) Frame in die-cast aluminium, phosphorchromated and painted in anthracite-grey sablé or coated in stainless steel AISI 316 (16 QUICK / I)
- Cable gland M20x1.5 for cables Ø7- Ø12 mm.
- Connection box in technopolymer with automatic connector switch to facilitate the electric connection.
- Power supply 230V/50Hz, 220±240V on specification.
- External screws in stainless steel.
- Horizontal adjustability of the fixture at 360°.
- Quick easy adjustable levelling system allows movement of the fitting to ensure a flush finish to ground during installation.




CRICKET 16 Quick / C

Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes	T max °C
E27	14W	FBT	6.500°	C EW	96	II				• 07033396	☺	68°
E27	14W	FBT	6.500°	C EW	04	II				• 07033404	☺	68°
E27	14W	FBT	2.700°	C EW	96	II				• 07034896	☺	68°
E27	14W	FBT	2.700°	C EW	04	II				• 07034904	☺	68°



CRICKET 16 Quick

Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes	T max °C
Gu5,3	50W	HRG 36°			96	II	T			• 07033596	☺, ⚡, T	175°
Gu5,3	50W	HRG 36°			04	II	T			• 07033604	☺, ⚡, T	175°
GZ10	50W	HRG 35°			96	II				• 07033796	☺, ⚡, T	175°
GZ10	50W	HRG 35°			04	II				• 07033804	☺, ⚡, T	175°
E27	50W	PAR 20 30°			96	II				• 07033996	☺, ⚡, T	175°
E27	50W	PAR 20 30°			04	II				• 07034004	☺, ⚡, T	175°
GX10	20W	CMH-MR16-25°	3.000°		96	II	ETRCL			• 07034196	☺, ⚡, T, ⚡	80°
GX10	20W	CMH-MR16-25°	3.000°		04	II	ETRCL			• 07034204	☺, ⚡, T, ⚡	80°
GX10	20W	CMH-MR16-40°	3.000°		96	II	ETRCL			• 07034396	☺, ⚡, T, ⚡	80°
GX10	20W	CMH-MR16-40°	3.000°		04	II	ETRCL			• 07034404	☺, ⚡, T, ⚡	80°



⚡ Complete with electronic ballast 220-240V 50/60Hz.

☺ Fittings supplied complete with lamp.

T With transformer 230V/12V.

⚡ Version with adjustable lamp position.

Quick!



FAST INSTALLATION: See model numbers for fittings supplied complete with lamp.



								IK 09 16J								
CLASS II		96	04	IP 67								HRG GZ10	CMH-MR16 20W GX10	HRG Max 50W GU 5,3	IPAR 50W E27	FBT 14W MEGAMAN LILLIPUT
								H07RN-F 2x1,5 - 2x2,5 2x2,5mm ²			Max 30Km/h Max 6.000Kg		Max 2000Kg 5 kN 50 Nm			

INSTALLATION

CRICKET 16 QUICK recessed in-ground fitting may be subjected to heavy loads and impact from pedestrians / motor vehicles during operation. To ensure optimum performance and safety it is important that the fittings are correctly installed by suitably qualified person, in strict accordance with the manufacturers installation instructions. Fittings should not be installed in a hollow or submerged underwater, they should be provided with proper drainage by means of a gravel sump, or drain pipe, ≥30cm below the bottom of the fitting. When installing fittings within public access it is advisable to be aware of the glass surface temperatures indicated (T max °C) and confirm measurements at rated voltage are in accordance with national and local standards. We recommend the use of H07RN-F cables only.

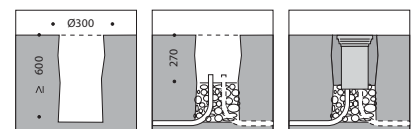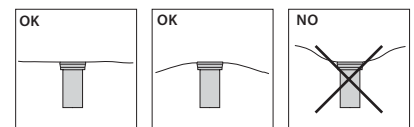

	100m Max			
H07RN-F	14W	20W	50W GU 5,3	50W GZ10
2x1,5mm²	n°40	n°26	n°11	n°12
2x2,5mm²	n°70	n°42	n°19	n°20



ACCESSORIES



Code	Denomination	Description
14090720	A0450 AL	Frosted glass for a reduced glare more comfortable light emission (suitable for Cricket 16 Quick/AL only).
14122820	A0450	Frosted glass for a reduced glare more comfortable light emission, suitable for Cricket 16 Quick/Inox only.
14090820	A0451 AL	Frosted glass supplement to be ordered together with fitting for factory fitted option. For Cricket 16 Quick/AL only.
14122920	A0451 I	Frosted glass supplement to be ordered together with fitting for factory fitted option, suitable for Cricket 16 Quick/Inox only.
14018320	A0235 AL/I	Rubber cable H07RN-F 2x1.5mm ² supplied and sold in 1 metre units.

