


Eurotype Recessed Track

Flanged Recessed Track

Features

- Three circuit mains-voltage track system.
- Made of extruded aluminium and fitted with four 16 A rolled copper conductors which are housed in extruded black PVC insulators.
- With 3 separately controllable current circuit.
- Also available in Surface Mounted version.
- The system has many accessories that can resolve almost all types of lighting installation requirements.
- It also has the facility for direct surface mounting through knockouts at 500mm spacing.
- If required, it can be cut to lengths on site.

IP20 EN 60570




Recessed Track

2092	Length: 1m
2093	Length: 2m
2094	Length: 3m

Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.

Reference Diagram for Choice of Connectors

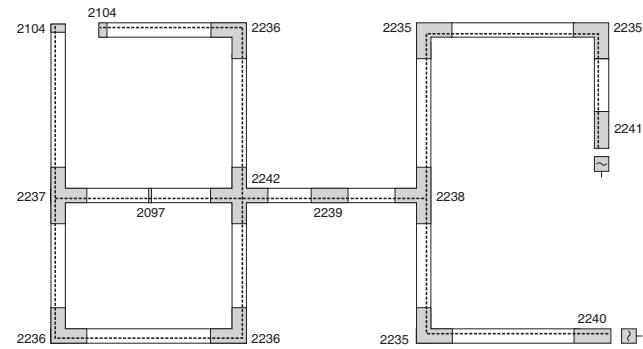


The drawing is Reflected Ceiling View.
.....
Directive Lug on the back of connectors.





Installation Components



2105 Mechanical Coupler
Available in colours 10, 11, 75



2108 Wire Hanger
Available in colours 10, 11, 75




Recessed Couplings


IP20 EN 60570




2240 Feeder (Right)
2241 Feeder (Left)
Available in colours 10, 11




2239 Straight Connector
Available in colours 10, 11




2235 L Connector (Right)
2236 L Connector (Left)
Available in colours 10, 11



2242 X Connector
Available in colours 10, 11



2237 T Connector (Right)
2238 T Connector (Left)
Available in colours 10, 11



2104 End Cap
Available in colours 10, 11



2097 Concealed Connector
Available in colours 10, 11