




Flap

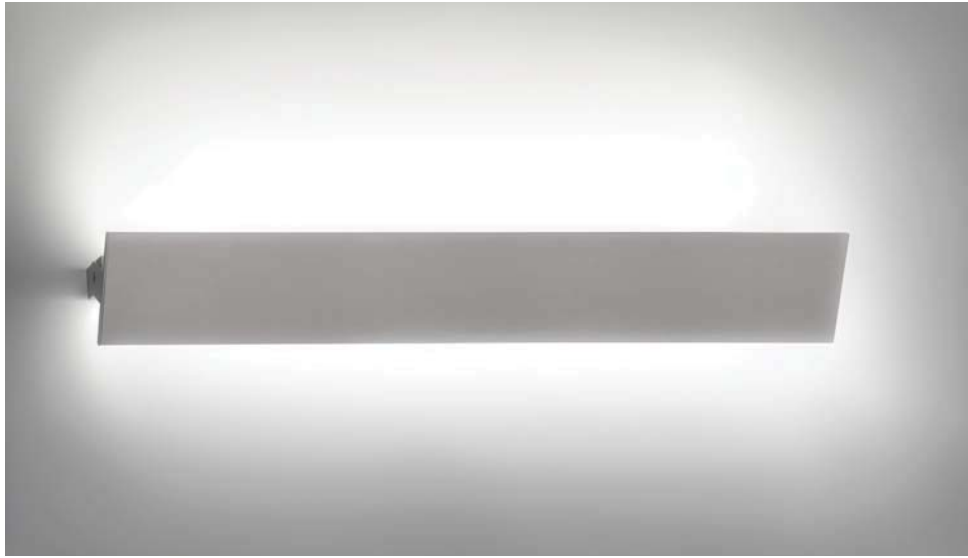

Related products:



MINILUCE
P.274-275



MINILUCE LED
P.272-273

Features IP20/IP40


- Wall luminaire for direct/indirect lighting effect.
- Adjustable screen is in extruded aluminium with die formed steel end caps and integrated T16 (T5) slim electronic fluorescent fixture or with integrated LEDs fixture to operate on main voltage of 220-240V
- 50/60Hz. Both option are supplied with acrylic opal satin diffuser .
- Dimmable version is available upon request.
- Designed and manufactured to comply to European standard EN 60598.

Applications

- Flap is a wall surface mounted linear luminaire of extremely compact dimension, has minimal visual impact and maximum flexibility to make it possible to be integrated discreetly into the interior of rooms.
- To also be used to create continuous light line. Is available in different module lengths for T16 fluorescent lamps or LEDs.
- Applications areas: excellent choice for private offices, conference rooms and educational facilities.



Colour 75



Flap T5

1219	14W	G5	T5		L: 656
1220	21W	G5	T5		L: 956
1221	28W	G5	T5		L:1256

With integral electronic control gear 220-240V 50/60Hz.

IP40



Flap LED

1228-K30	With 30W LED	3000K	1800lm	L: 918	LED
1228-K40	With 30W LED	4000K	1950lm	L: 918	
1229-K30	With 40W LED	3000K	2400lm	L:1208	
1229-K40	With 40W LED	4000K	2600lm	L:1208	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.

CRI>80

Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request. Other beam optics or colour temperatures K or CRI are available upon request.

IP20