




FLUOLINE

design Silvia Paola Pennacchio

Fluoline fittings are constructed from a technopolymer body with a clear UV stabilised polycarbonate cover and stainless steel brackets (where applicable) producing a corrosion resistant fitting suitable for installation in marine / sea climate applications. Insulation Class II product. Available as through wiring connection with appropriate accessories. Easy low cost maintenance and installation.

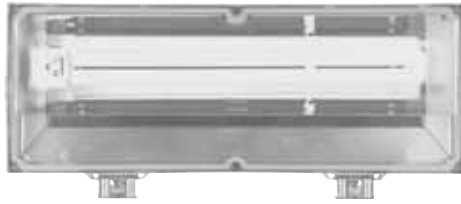

FLUOLINE 1 is the most compact model in the Fluoline range with modern clean simple lines ideal for discreet installations. Fluoline 1 is suitable for use with 7-9W compact fluorescent lamps (equivalent to 40/50W incandescent) complete with high frequency electronic ballast. Fluoline 1 is complete with a moulded fixing base for wall or ceiling installation allowing various mounting positions. Options for stainless steel mounting brackets are also available.



FLUOLINE 2 is the intermediate model in the Fluoline range with a unique cylindrical compact design. Fluoline 2 are ideal for walkways and path lighting, wall mounted on buildings to provide general area lighting, security lighting and residential lighting. Fluoline 2 is suitable for use with 26-42W compact fluorescent lamps complete with conventional or electronic control gear. An option for 70W HID E27 lamps with integral ignitor and toughened glass cover, instead of polycarbonate, is available.



FLUOLINE 3 is the larger and higher powered of the compact fluorescent versions within the Fluoline range. The contemporary clean geometry and shallow depth combined with a light source of up to 2x36W (5800 lm) making Fluoline 3 particularly suitable for shop façades, sign lighting, advertising boards, walkways, and security lighting. Fluoline 3 is suitable for single or twin Dulux-L 24 or 36W lamps complete with conventional or electronic control gear for single lamp version and electronic control gear for twin lamp. Lamp positions on the single lamp versions can be adjusted on site for asymmetrical or symmetrical distribution. Fluoline 3 is supplied with two stainless steel brackets for wall or ceiling installation. Accessories are available for bracket mounting (A0300), extension arm bracket (A0301). Available as well as kit c/w 500mm support arm and lamp.




FLUOLINE 2

			26-42W	50-70W							IK 09	10J						
CLASS II		85 90	94	IP 65											F SQ 26W DULUX-D PL-C DULUX-DE	FSMH max 42W DULUX-TE PL-T	SE Max 70W NAV-E/I SON/I	ME 70W HQL-E CDO-ET




FLUOLINE 2

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	EEI =	Cosp ≥ 0,9	Code	Notes
G24d-3	26W	FSQ	S	85	II	CR	B2	-	-	-	05147485	
G24d-3	26W	FSQ	S	90	II	CR	B2	-	-	-	05146890	
GX24q-3/4	26-32-42W	FSMH / FSQ	S	85	II	ETRC	A2	-	-	-	05147885	
GX24q-3/4	26-32-42W	FSMH / FSQ	S	90	II	ETRC	A2	-	-	-	05147290	
E27	50W	SE/I	S	94	II	CR	-	-	-	-	05155890	
E27	70W	SE/I	S	94	II	CR	-	-	-	-	05146990	
E27	70W	ME	S	94	II	CR	-	-	-	-	05170494	



- Complete with electronic ballast 220-240V 50/60Hz.
- For lamps with integral ignitor.

ACCESSORIES

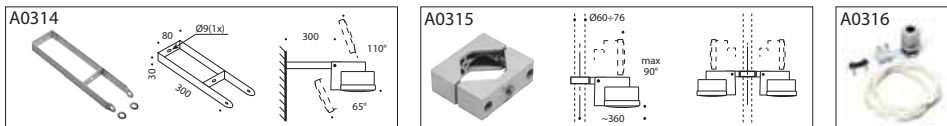

Code	Denomination	Colour	Description
14050390	A0314	90	300mm extension arm bracket finished light grey, allows adjustable orientation of the FLUOLINE 2 fitting.
14050485	A0314	85	300mm extension arm bracket finished white, allows adjustable orientation of the FLUOLINE 2 fitting.
14050590	A0315	94	Die-cast aluminium pole fixing clamp finished white suitable for single or two Fluoline 2 fittings, back to back, on Ø60-76mm poles.
14050620	A0316		Through wiring kit complete with M16x1.5 anti-rupturing IP68 cable gland, 2x4 mm² terminal block with insulated support and cable guide (cables not supplied).



- Body in tecnopolymer white or light grey (FLUO 26-42W) and aluminium grey (SE ME 50-70W).
- Cover in clear UV stabilized polycarbonate (FLUO 26-42W) complete with anti-ageing silicone gasket.
- Toughened flat glass cover (SE-ME 50/70W) with anti-ageing dual foam silicone gasket, factory injection direct to glass.
- Reflector in high purity aluminium anodised and polished.
- Anti-tearing M16x1.5 cable gland for Ø5-10mm cables.
- Stainless steel adjustable fixing bracket
- A2 stainless steel external screws.

Through wiring accessory kit (A0316) suitable for maximum 13x26W, 10x42W, 7x50W or 5x70W on max. 100m length.