




FLUOLINE

design Silvia Paola Pennacchio

Fluoline fittings are constructed from a technopolymer body with a clear UV stabilised polycarbonate cover and stainless steel brackets (where applicable) producing a corrosion resistant fitting suitable for installation in marine / sea climate applications. Insulation Class II product. Available as through wiring connection with appropriate accessories. Easy low cost maintenance and installation.

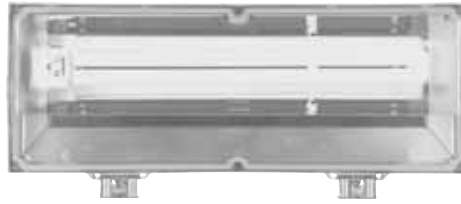

FLUOLINE 1 is the most compact model in the Fluoline range with modern clean simple lines ideal for discreet installations.

Fluoline 1 is suitable for use with 7-9W compact fluorescent lamps (equivalent to 40/50W incandescent) complete with high frequency electronic ballast.

Fluoline 1 is complete with a moulded fixing base for wall or ceiling installation allowing various mounting positions. Options for stainless steel mounting brackets are also available.



FLUOLINE 2 is the intermediate model in the Fluoline range with a unique cylindrical compact design.

Fluoline 2 are ideal for walkways and path lighting, wall mounted on buildings to provide general area lighting, security lighting and residential lighting.

Fluoline 2 is suitable for use with 26-42W compact fluorescent lamps complete with conventional or electronic control gear. An option for 70W HID E27 lamps with integral ignitor and toughened glass cover, instead of polycarbonate, is available.



FLUOLINE 3 is the larger and higher powered of the compact fluorescent versions within the Fluoline range. The contemporary clean geometry and shallow depth combined with a light source of up to 2x36W (5800 lm) making Fluoline 3 particularly suitable for shop façades, sign lighting, advertising boards, walkways, and security lighting.

Fluoline 3 is suitable for single or twin Dulux-L 24 or 36W lamps complete with conventional or electronic control gear for single lamp version and electronic control gear for twin lamp. Lamp positions on the single lamp versions can be adjusted on site for asymmetrical or symmetrical distribution.

Fluoline 3 is supplied with two stainless steel brackets for wall or ceiling installation.

Accessories are available for bracket mounting (A0300), extension arm bracket (A0301).

Available as well as kit c/w 500mm support arm and lamp.




			IK 07 4J		max 2,6kg		
CLASS II		85 90	IP 65			FSD 24W DULUX-L PL-L	FSD 36W DULUX-L PL-L



FLUOLINE 3

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
2G11	1x24W	FSD	S / A	85	II	CR	B2	•		05145285	
2G11	1x24W	FSD	S / A	90	II	CR	B2	•		05135994	
2G11	1x36W	FSD	S / A	85	II	CR	B1	•		05145485	
2G11	1x36W	FSD	S / A	90	II	CR	B1	•		05136194	
2G11	1x24W	FSD	S / A	85	II	ETRC	A3	•		05145385	
2G11	1x24W	FSD	S / A	90	II	ETRC	A3	•		05136094	
2G11	1x36W	FSD	S / A	85	II	ETRC	A2	•		05145585	
2G11	1x36W	FSD	S / A	90	II	ETRC	A2	•		05136294	
2G11	2x36W	FSD	S	85	II	ETRC	A2	•		05145685	
2G11	2x36W	FSD	S	90	II	ETRC	A2	•		05136394	



Complete with electronic ballast 220-240V 50/60Hz.



FLUOLINE 3 KIT


Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
2G11	2x36W	FSD	○ 4000°	S	85	II	ETRCL	A2	•	07031585	
2G11	2x36W	FSD	○ 4000°	S	90	II	ETRCL	A2	•	07031090	

Kit being composed of Fluoline 3 + A0301 + 2x36W with illustrated packaging.

Complete with electronic ballast 220-240V 50/60Hz.

Fittings supplied complete with lamp.

ACCESSORIES

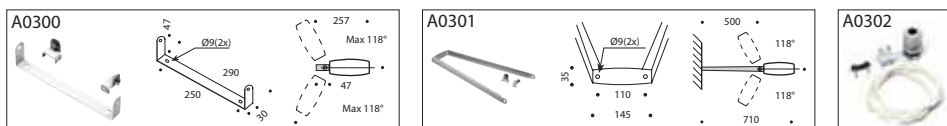

Code	Denomination	Colour	Description
14048504	A0300	04	Stainless steel bracket allows adjustable orientation of the FLUOLINE 3 fitting.
14047385	A0301	85	500mm extension arm bracket finished white, allows adjustable orientation of the FLUOLINE 3 fitting.
14046990	A0301	90	500mm extension arm bracket finished grey, allows adjustable orientation of the FLUOLINE 3 fitting.
14047020	A0302		Through wiring kit comprising: M16x1.5-IP68 anti-rupturing cable gland, 2x4 mm² terminal block and 1 mm² double insulated cables.



- Body in tecnopolymer white or grey.
- Impact resistant clear UV stabilized polycarbonate cover.
- Dual foam polyurethane gasket.
- Reflector in high purity polished aluminium.
- Anti-tearing M16x1.5 cable gland for Ø5-10mm cables.
- A0302 Through wiring kit accessory.
- A2 stainless steel external screws.

Fluoline 3 are suitable for single or through wiring connection with maximum n°14/24W, n°10/1x36W or n°6/2x36W twin lamp on max. 100m length.

