

# Fronteluce



## Features

IP66 IK07

- Multi system linear projector.
- End caps and mounting brackets accessories are made of die cast aluminium.
- Housing is in extruded aluminium, with toughened safety glass, weatherproof durable silicone gasket, breather device and external screws made of stainless steel.
- Superior polyester powder paint resistant to outdoor atmospheric conditions.
- Front cover is designed to avoid accumulation of dust and water.
- Lamp replacement convenient easy 'no tool' due to the design of the front cover in hinged aluminium frame.
- Electrical installation includes double cable entry.
- Light sources include Fluorescent, LED and RGB.
- Long life LED light sources provide IR and UV free emission.
- LED optics use collimating lens made of optical polymer for different beam optics.
- Super pure aluminium reflector with different beam optics.
- Light head include adjust ability for vertical and horizontal mechanical locking system to ensure aiming stability.
- Designed and manufactured to comply with European standard EN 60598



## Applications

- Fronteluce a linear luminaire of extremely compact dimension, has minimal visual impact and maximum flexibility to make it possible to be integrated discreetly into the architecture of a building to also be used to create continuous light line. It is available in different modules lengths for T16 fluorescent lamps ,white or coloured or RGB LEDs. Due to the range of accessories it can be mounted on the ground, wall and wall extended, ceiling pole top and pole side.
- Application areas: to illuminate buildings, landmarks facade, under canopy, big sign boards, sculptures architectural, structural enhancement, exterior or interior, residential or commercial.



Easy relamping

Colour 29

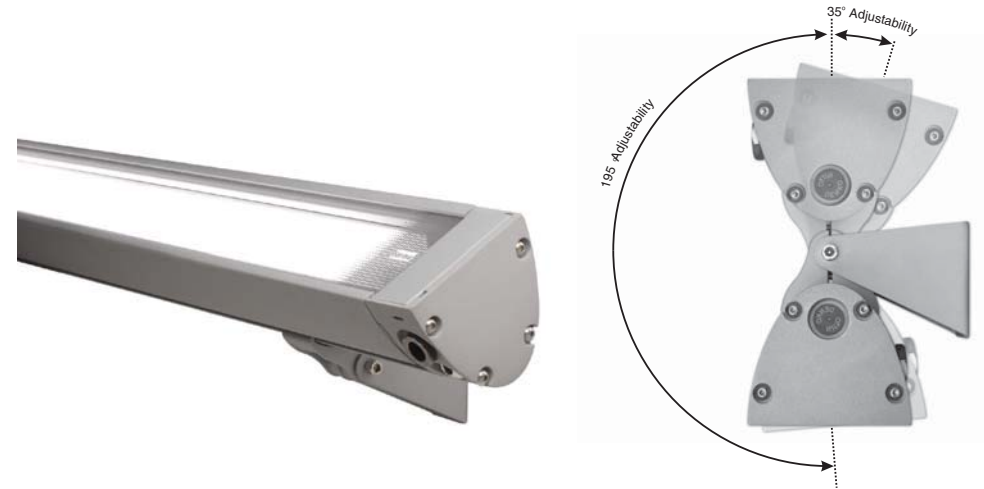

## Fronteluce LED

<b>3195-RGB</b>	With 12x3W LED RGB	L: 674	
<b>3196-RGB</b>	With 18x3W LED RGB	L: 974	
<b>3197-RGB</b>	With 24x3W LED RGB	L: 1274	
<b>3198-K30D25</b>	With 12x3W LED 3000K 1500lm	L: 674	25°
<b>3198-K63D25</b>	With 12x3W LED 6300K 1800lm	L: 674	25°
<b>3199-K30D25</b>	With 18x3W LED 3000K 2300lm	L: 974	25°
<b>3199-K63D25</b>	With 18x3W LED 6300K 2750lm	L: 974	25°
<b>3200-K30D25</b>	With 24x3W LED 3000K 3000lm	L: 1274	25°
<b>3200-K63D25</b>	With 24x3W LED 6300K 3600lm	L: 1274	25°


Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80.  
Dali/1-10V DC dimmable version drivers are available upon request. Other colour temperatures K or CRI are available upon request.



## Fronteluce LED

<b>3486-K30</b>	With 40W LED 3000K 2400lm	L: 674	
<b>3486-K40</b>	With 40W LED 4000K 2600lm	L: 674	
<b>3487-K30</b>	With 60W LED 3000K 3600lm	L: 974	
<b>3487-K40</b>	With 60W LED 4000K 3900lm	L: 974	
<b>3488-K30</b>	With 80W LED 3000K 4800lm	L: 1274	
<b>3488-K40</b>	With 80W LED 4000K 5200lm	L: 1274	

With frosted safety glass.  
Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80.  
Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request. Other colour temperatures K or CRI are available upon request.




**Fronteluce T5**



<b>3159</b>	14/24W	G5 T5		L: 674
<b>3160</b>	21/39W	G5 T5		L: 974
<b>3161</b>	28/54W	G5 T5		L: 1274
<b>3162</b>	35/49/80W	G5 T5		L: 1574

With integral electronic control gear 220-240V 50/60Hz.



**Accessories**





**2379 Mounting brackets**  
2 pcs. adjustable.  
Available in colour 29.




**2380 Mounting brackets**  
2 pcs. adjustable.  
Available in colour 29.





**2381 Mounting brackets**  
2 pcs. adjustable and extendable.  
Available in colour 29.



**2382 Suspension set**  
2 pcs. 1500mm wire hangers and one power supply cable.  
Available in colour 29.




**2394 Pole mounted bracket set**  
Ø 102mm



**2395 Pole mounted bracket set**  
Ø 120mm


For one fixture.  
Available in colour 29.




**2355 Pole mounted bracket set**  
Ø 102mm

**2366 Pole mounted bracket set**  
Ø 120mm


For two fixtures.  
Available in colour 29.



**2567 Wall mounted set**  
Available in colour 29




**Accessories**



**2568 Billboard set** Ø 102mm

**2569 Billboard set** Ø 120mm


For one banner.  
Available in colour 29.



**2570 Billboard set** Ø 102mm


**2571 Billboard set** Ø 120mm

For two banners.  
Available in colour 29.



**2975 DMX Switchboard**

Power supply: 110-240V 50/60Hz.  
Installation: Plastic recessing box included.  
IP40.  
Control signal: DMX512.  
Control channel: 60 channels.  
For details, please see p.426.



**2478 IP65 Extension signal cable** L: 1000

**2479 IP65 Extension signal cable** L: 2000

For RGB with M/F connectors.



**2577 IP68 Fast Connector M20**

(Ø 6÷12mm)

