



# Gola 160

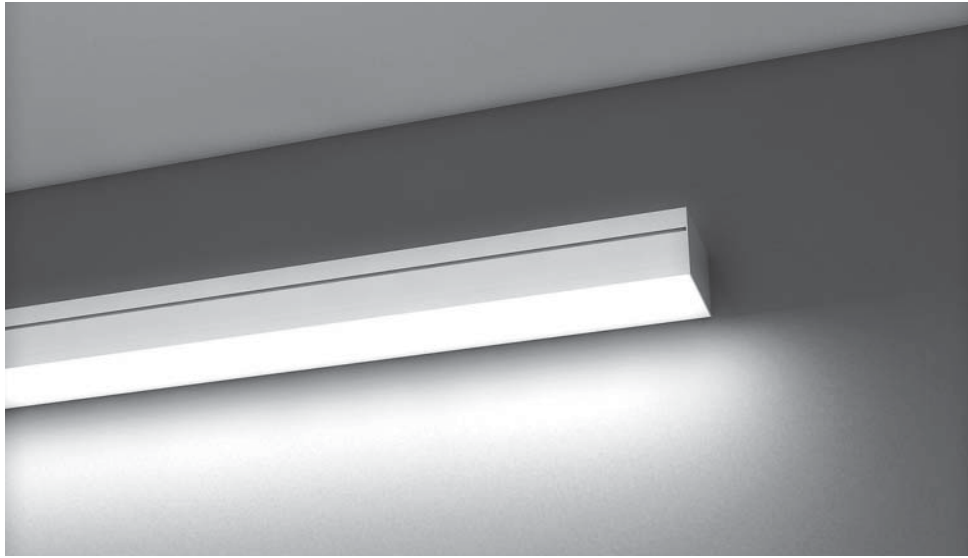

## Related products:



**GOLA 40** P.326-327  
**GOLA 60** P.328-329  
**GOLA 95** P.330-331  
**GOLA Systems** P.298-311

## Features


IP20

- Wall mounted linear luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- Easy installation via adjustable brackets.
- Staggered lamping include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louwer by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- Designed and manufactured to comply with European standard EN 60598.

## Applications

- Gola Wall fit T16 (T5) fluorescent or LED light sources that can be mounted vertically or horizontally with high efficiency and flexible options in a compact, attractive luminaire, combined with optical reflectors or diffuser and available with direct/indirect option. The simple discreet linear shape makes it ideal to compliment the minimalist look in the architecture.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, hallways, stairwells, boardrooms, cafeterias, restaurants and hotels.

Complete with end caps and accessories for wall mounting.

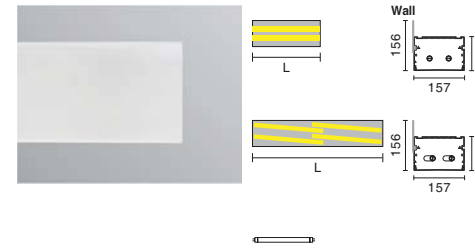


## Gola 160 Opal T5

### Wall

<b>G160224TOMW</b>	2x24W	G5 T5	L: 588
<b>G160239TOMW</b>	2x21/39W	G5 T5	L: 888
<b>G160254TOMW</b>	2x28/54W	G5 T5	L: 1188
<b>G160280TOMW</b>	2x35/49/80W	G5 T5	L: 1488

<b>G1602239TOMW</b>	2+2x21/39W	G5 T5	L: 1656
<b>G1602254TOMW</b>	2+2x28/54W	G5 T5	L: 2256
<b>G1602249TOMW</b>	2+2x35/49W	G5 T5	L: 2856
<b>G1602280TOMW</b>	2+2x80W	G5 T5	L: 2856

With integral electronic control gear 220-240V 50/60Hz.

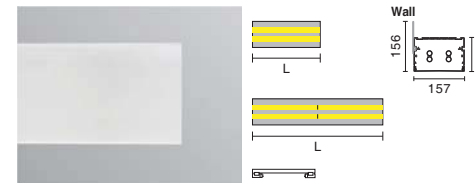


## Gola 160 Opal SLS

### Wall

<b>G160224SOMW</b>	2x14/24W	G5 SLS	L: 588
<b>G160239SOMW</b>	2x21/39W	G5 SLS	L: 888
<b>G160254SOMW</b>	2x28/54W	G5 SLS	L: 1188

<b>G1602239SOMW</b>	2+2x21/39W	G5 SLS	L: 1772
<b>G1602254SOMW</b>	2+2x28/54W	G5 SLS	L: 2372

With integral electronic control gear 220-240V 50/60Hz.

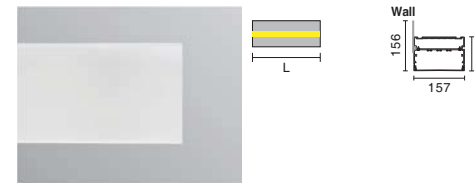

## Gola 160 Opal LED

### Wall

<b>G160160BOMW-K30</b>	60W	LED 3000K	3600lm	L: 588	<b>LED</b>
<b>G160160BOMW-K40</b>	60W	LED 4000K	3900lm	L: 588	
<b>G160190BOMW-K30</b>	90W	LED 3000K	5400lm	L: 888	
<b>G160190BOMW-K40</b>	90W	LED 4000K	5850lm	L: 888	
<b>G1601100BOMW-K30</b>	100W	LED 3000K	7200lm	L: 1188	
<b>G1601100BOMW-K40</b>	100W	LED 4000K	7800lm	L: 1188	
<b>G1601150BOMW-K30</b>	150W	LED 3000K	9000lm	L: 1488	
<b>G1601150BOMW-K40</b>	150W	LED 4000K	9750lm	L: 1488	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80.

Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request. Other colour temperature K or CRI are available upon request.