


Gola 160



Related products:



GOLA 40 P.262-263
GOLA 60 P.264-265
GOLA 95 P.266-269
GOLA Systems P.298-311

Features IP20

- Linear Pendant/Ceiling mounted luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Cable and stainless steel adjustable wire suspensions with canopy are included and ready for electrical connection.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- System versions can be configured into linear I, 90° L, T and X shapes or other custom configuration (details are all by request).
- Gimbal rotatable and pivotable light heads unit for Low Voltage Halogen, Metal Halide or LED can be incorporated only on Gola 95 or 160 by request.
- Staggered lamping include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louver by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- For Fluorescent lamps, Dimmable and Emergency versions available upon request.
- Designed and manufactured to comply with European standard EN 60598.


Applications

- Gola Pendant and Surface mounting, suitable for continuous runs are a true performance linear luminaires that allows the user to install fewer fixtures in a space while improving the quality of light output. High quality T5 or LED light sources combine with optical reflectors or diffuser offering a wide range of designs and light configurations options, the diminutive shape it adds a new level of style to interiors.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, boardrooms, stairwells, hallways, cafeterias, restaurants and hotels.

Complete with end caps and accessories for surface or pendant mounting.



Colour

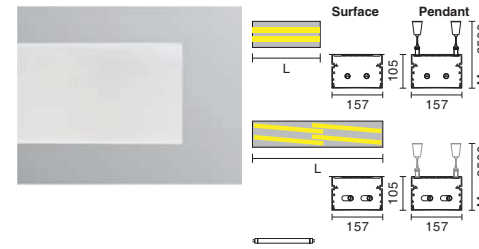


Gola 160 Opal T5

Surface	Pendant			
G160224TOMN	G160224TOMP	2x24W	G5 T5	L: 588
G160239TOMN	G160239TOMP	2x21/39W	G5 T5	L: 888
G160254TOMN	G160254TOMP	2x28/54W	G5 T5	L: 1188
G160280TOMN	G160280TOMP	2x35/49/80W	G5 T5	L: 1488

G1602239TOMN	G1602239TOMP	2+2x21/39W	G5 T5	L: 1656
G1602254TOMN	G1602254TOMP	2+2x28/54W	G5 T5	L: 2256
G1602249TOMN	G1602249TOMP	2+2x35/49W	G5 T5	L: 2856
G1602280TOMN	G1602280TOMP	2+2x80W	G5 T5	L: 2856

With integral electronic control gear 220-240V 50/60Hz.

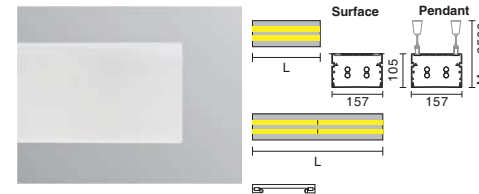


Gola 160 Opal SLS

Surface	Pendant			
G160224SOMN	G160224SOMP	2x14/24W	G5 SLS	L: 588
G160239SOMN	G160239SOMP	2x21/39W	G5 SLS	L: 888
G160254SOMN	G160254SOMP	2x28/54W	G5 SLS	L: 1188

G1602239SOMN	G1602239SOMP	2+2x21/39W	G5 SLS	L: 1772
G1602254SOMN	G1602254SOMP	2+2x28/54W	G5 SLS	L: 2372

With integral electronic control gear 220-240V 50/60Hz.

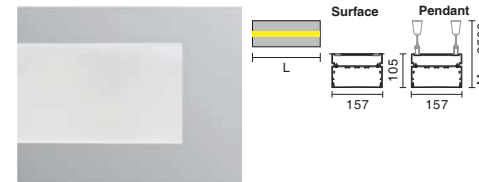

Gola 160 Opal LED

Surface	Pendant					
G160160BOMN	G160160BOMP	-K30	60W	LED	3000K	3600lm L: 588
G160160BOMN	G160160BOMP	-K40	60W	LED	4000K	3900lm L: 588
G160190BOMN	G160190BOMP	-K30	90W	LED	3000K	5400lm L: 888
G160190BOMN	G160190BOMP	-K40	90W	LED	4000K	5850lm L: 888
G1601120BOMN	G1601120BOMP	-K30	120W	LED	3000K	7200lm L:1188
G1601120BOMN	G1601120BOMP	-K40	120W	LED	4000K	7800lm L:1188
G1601150BOMN	G1601150BOMP	-K30	150W	LED	3000K	9000lm L:1488
G1601150BOMN	G1601150BOMP	-K40	150W	LED	4000K	9750lm L:1488

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.

CRI>80.

Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request. Other colour temperature K or CRI are available upon request.

LED