


Gola 40



Related products:



GOLA 60 P.328-329
GOLA 95 P.330-331
GOLA 160 P.332-333
GOLA Systems P.298-311

Features

IP20

- Wall mounted linear luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- Easy installation via adjustable brackets.
- Staggered lamping include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louwer by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- Designed and manufactured to comply with European standard EN 60598.


Applications

- Gola Wall fit T16 (T5) fluorescent or LED light sources that can be mounted vertically or horizontally with high efficiency and flexible options in a compact, attractive luminaire, combined with optical reflectors or diffuser and available with direct/indirect option. The simple discreet linear shape makes it ideal to compliment the minimalist look in the architecture.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, hallways, stairwells, boardrooms, cafeterias, restaurants and hotels.

Complete with end caps and accessories for wall mounting.



Colour

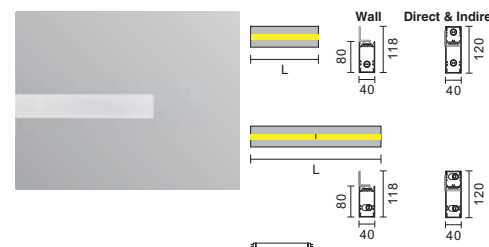


Gola 40 Opal T5

Wall	Wall Direct & Indirect				
G040124TOMW	G0401DI24TOUW	1x24W	G5 T5	L: 588	
G040139TOMW	G0401DI39TOUW	1x21/39W	G5 T5	L: 888	
G040154TOMW	G0401DI54TOUW	1x28/54W	G5 T5	L: 1188	
G040180TOMW	G0401DI80TOUW	1x35/49/80W	G5 T5	L: 1488	

G0401139TOMW	G0401DI39TOUW	1+1x21/39W	G5 T5	L: 1772	
G0401154TOMW	G0401DI54TOUW	1+1x28/54W	G5 T5	L: 2372	
G0401149TOMW	G0401DI49TOUW	1+1x35/49W	G5 T5	L: 2972	
G0401180TOMW	G0401DI80TOUW	1+1x80W	G5 T5	L: 2972	

With integral electronic control gear 220-240V 50/60Hz.

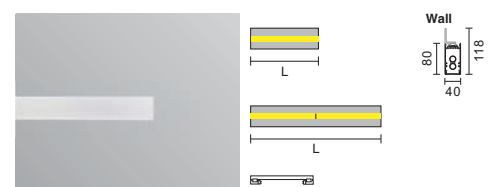


Gola 40 Opal SLS

Wall				
G040124SOMW	1x14/24W	G5 SLS	L: 588	
G040139SOMW	1x21/39W	G5 SLS	L: 888	
G040154SOMW	1x28/54W	G5 SLS	L: 1188	

G0401139SOMW	1+1x21/39W	G5 SLS	L: 1772	
G0401154SOMW	1+1x28/54W	G5 SLS	L: 2372	

With integral electronic control gear 220-240V 50/60Hz.

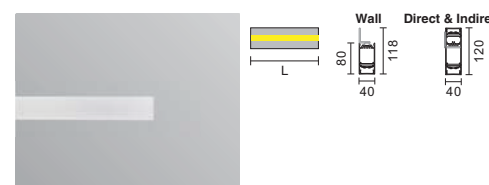

Gola 40 Opal LED

Wall	Wall Direct & Indirect				
G040120BOMW	G0401DI20BOUW -K30	20W LED	3000K 1200lm	L: 588	
G040120BOMW	G0401DI20BOUW -K40	20W LED	4000K 1300lm	L: 588	
G040130BOMW	G0401DI30BOUW -K30	30W LED	3000K 1800lm	L: 888	
G040130BOMW	G0401DI30BOUW -K40	30W LED	4000K 1950lm	L: 888	
G040140BOMW	G0401DI40BOUW -K30	40W LED	3000K 2400lm	L: 1188	
G040140BOMW	G0401DI40BOUW -K40	40W LED	4000K 2600lm	L: 1188	
G040150BOMW	G0401DI50BOUW -K30	50W LED	3000K 3000lm	L: 1488	
G040150BOMW	G0401DI50BOUW -K40	50W LED	4000K 3250lm	L: 1488	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.

CRI>80.

Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.

Other colour temperature K or CRI are available upon request.