



Gola 40

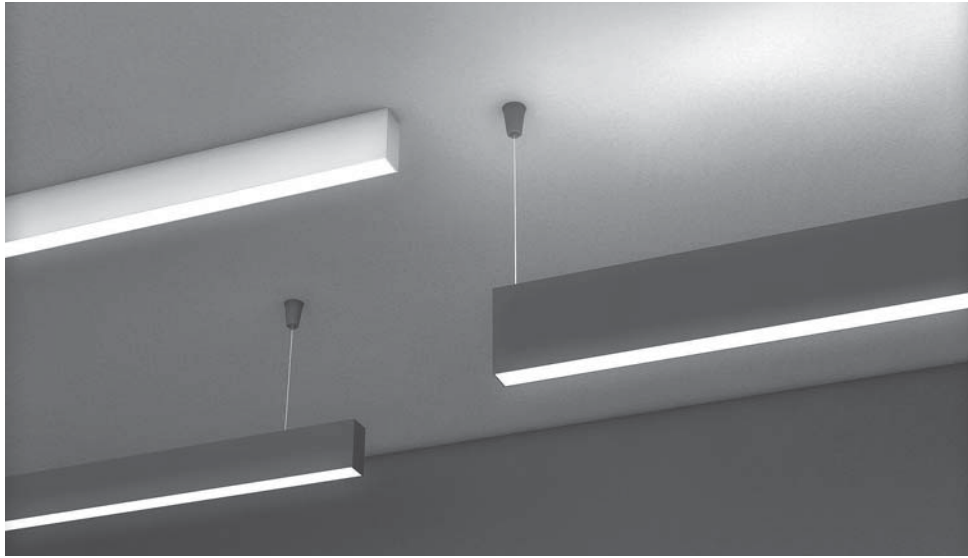

Related products:



GOLA 60 P.264-265
GOLA 95 P.266-269
GOLA 160 P.270-271
GOLA Systems P.298-311


Features IP20

- Linear Pendant/Ceiling mounted luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Cable and stainless steel adjustable wire suspensions with canopy are included and ready for electrical connection.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- System versions can be configured into linear I, 90° L, T and X shapes or other custom configuration (details are all by request).
- Gimbal rotatable and pivotable light heads unit for Low Voltage Halogen, Metal Halide or LED can be incorporated only on Gola 95 or 160 by request.
- Staggered lamplung include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louvers by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- For Fluorescent lamps, Dimmable and Emergency versions available upon request.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- Gola Pendant and Surface mounting, suitable for continuous runs are a true performance linear luminaires that allows the user to install fewer fixtures in a space while improving the quality of light output. High quality T5 or LED light sources combine with optical reflectors or diffuser offering a wide range of designs and light configurations options, the diminutive shape it adds a new level of style to interiors.
- Application areas: offices, banks, retail, public areas, departmental stores, schools corridors, boardrooms, stairwells, hallways, cafeterias, restaurants and hotels.

Complete with end caps and accessories for surface or pendant mounting.

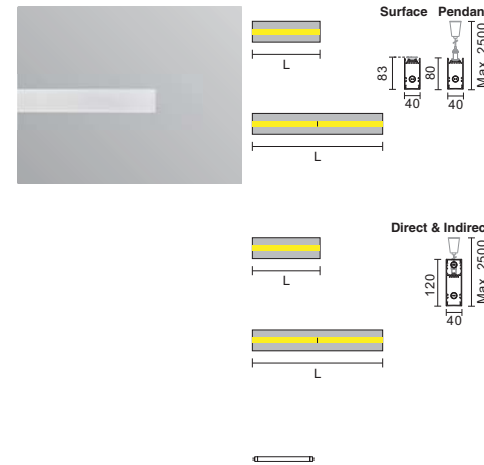


Gola 40 Opal T5 Surface		Pendant			
G040124TOMN	G040124TOMP	1x24W	G5 T5	L: 588	
G040139TOMN	G040139TOMP	1x21/39W	G5 T5	L: 888	
G040154TOMN	G040154TOMP	1x28/54W	G5 T5	L:1188	
G040180TOMN	G040180TOMP	1x35/49/80W	G5 T5	L:1488	
G0401139TOMN	G0401139TOMP	1+1x21/39W	G5 T5	L:1772	
G0401154TOMN	G0401154TOMP	1+1x28/54W	G5 T5	L:2372	
G0401149TOMN	G0401149TOMP	1+1x35/49W	G5 T5	L:2972	
G0401180TOMN	G0401180TOMP	1+1x80W	G5 T5	L:2972	

With integral electronic control gear 220-240V 50/60Hz.


Pendant Direct & Indirect					
G0401D124TOUP	1D+1x24W	G5 T5	L: 648		
G0401D139TOUP	1D+1x21/39W	G5 T5	L: 948		
G0401D154TOUP	1D+1x28/54W	G5 T5	L:1248		
G0401D180TOUP	1D+1x35/49/80W	G5 T5	L:1548		
G04011D139TOUP	1+1D+1x21/39W	G5 T5	L:1832		
G04011D154TOUP	1+1D+1x28/54W	G5 T5	L:2432		
G04011D149TOUP	1+1D+1x35/49W	G5 T5	L:3032		
G04011D180TOUP	1+1D+1x80W	G5 T5	L:3032		

Opal diffuser on both Direct and Indirect emission.
 With integral electronic control gear 220-240V 50/60Hz.

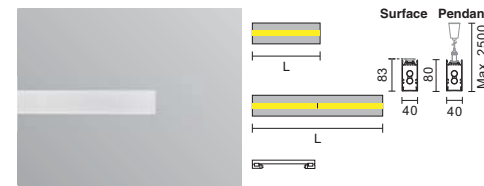

Gola 40 Opal SLS Surface		Pendant			
G040124SOMN	G040124SOMP	1x14/24W	G5 SLS	L: 588	
G040139SOMN	G040139SOMP	1x21/39W	G5 SLS	L: 888	
G040154SOMN	G040154SOMP	1x28/54W	G5 SLS	L:1188	
G0401139SOMN	G0401139SOMP	1+1x21/39W	G5 SLS	L:1772	
G0401154SOMN	G0401154SOMP	1+1x28/54W	G5 SLS	L:2372	

With integral electronic control gear 220-240V 50/60Hz.

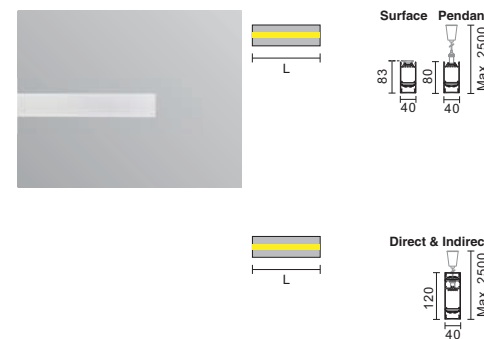

Gola 40 Opal LED Surface		Pendant			
G040120BOMN	G040120BOMP -K30	20W LED	3000K 1200lm	L: 588	LED
G040120BOMN	G040120BOMP -K40	20W LED	4000K 1300lm	L: 588	
G040130BOMN	G040130BOMP -K30	30W LED	3000K 1800lm	L: 888	
G040130BOMN	G040130BOMP -K40	30W LED	4000K 1950lm	L: 888	
G040140BOMN	G040140BOMP -K30	40W LED	3000K 2400lm	L:1188	
G040140BOMN	G040140BOMP -K40	40W LED	4000K 2600lm	L:1188	
G040150BOMN	G040150BOMP -K30	50W LED	3000K 3000lm	L:1488	
G040150BOMN	G040150BOMP -K40	50W LED	4000K 3250lm	L:1488	

Opal diffuser on both Direct and Indirect emission.
 Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.
 CRI>80. Other colour temperature K or CRI are available upon request.
 DALI/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.

Pendant Direct & Indirect					
G0401D120BOUP-K30	1D+1x20W LED	3000K 2x1200lm	L: 648		LED
G0401D120BOUP-K40	1D+1x20W LED	4000K 2x1300lm	L: 648		
G0401D130BOUP-K30	1D+1x30W LED	3000K 2x1800lm	L: 948		
G0401D130BOUP-K40	1D+1x30W LED	4000K 2x1950lm	L: 948		
G0401D140BOUP-K30	1D+1x40W LED	3000K 2x2400lm	L:1248		
G0401D140BOUP-K40	1D+1x40W LED	4000K 2x2600lm	L:1248		
G0401D150BOUP-K30	1D+1x50W LED	3000K 2x3000lm	L:1548		
G0401D150BOUP-K40	1D+1x50W LED	4000K 2x3250lm	L:1548		

Opal diffuser on both Direct and Indirect emission.
 Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.
 CRI>80. Other colour temperature K or CRI are available upon request.
 DALI/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.