



Gola 60

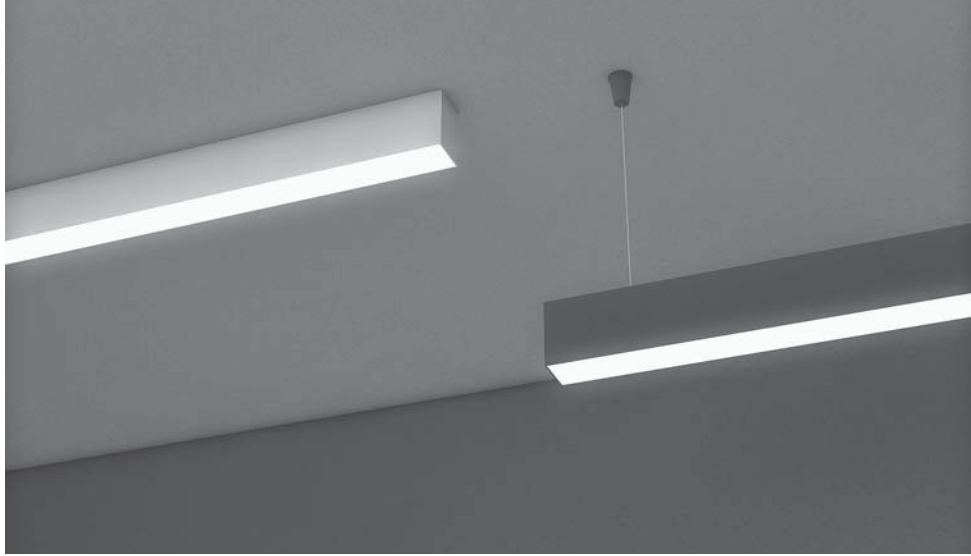

Related products:



GOLA 40 P.262-263
GOLA 95 P.266-269
GOLA 160 P.270-271
GOLA Systems P.298-311


Features IP20

- Linear Pendant / Ceiling mounted luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Cable and stainless steel adjustable wire suspensions with canopy are included and ready for electrical connection.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- System versions can be configured into linear I, 90° L, T and X shapes or other custom configuration (details are all by request).
- Gimbal rotatable and pivotable light heads unit for Low Voltage Halogen, Metal Halide or LED can be incorporated only on Gola 95 or 160 by request.
- Staggered lamplung include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louwer by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- For Fluorescent lamps, Dimmable and Emergency versions available upon request.
- Designed and manufactured to comply with European standard EN 60598.

Applications


- Gola Pendant and Surface mounting, suitable for continuous runs are a true performance linear luminaires that allows the user to install fewer fixtures in a space while improving the quality of light output. High quality T5 or LED light sources combine with optical reflectors or diffuser offering a wide range of designs and light configurations options, the diminutive shape it adds a new level of style to interiors.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, boardrooms, stairwells, hallways, cafes, restaurants and hotels.

Complete with end caps and accessories for surface or pendant mounting.

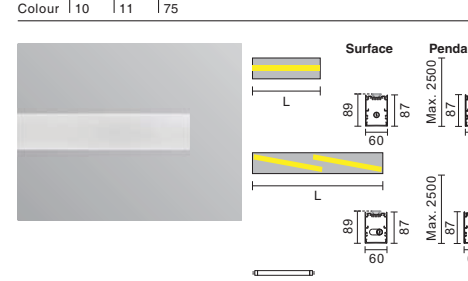


Gola 60 Opal T5 Surface		Pendant				
Surface	Pendant					
G060124TOMN	G060124TOMP	1x24W	G5 T5	L:	588	
G060139TOMN	G060139TOMP	1x21/39W	G5 T5	L:	888	
G060154TOMN	G060154TOMP	1x28/54W	G5 T5	L:	1188	
G060180TOMN	G060180TOMP	1x35/49/80W	G5 T5	L:	1488	
G0601139TOMN	G0601139TOMP	1+1x21/39W	G5 T5	L:	1656	
G0601154TOMN	G0601154TOMP	1+1x28/54W	G5 T5	L:	2256	
G0601149TOMN	G0601149TOMP	1+1x35/49W	G5 T5	L:	2856	
G0601180TOMN	G0601180TOMP	1+1x80W	G5 T5	L:	2856	

With integral electronic control gear 220-240V 50/60Hz.

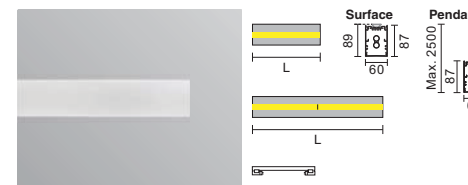


Gola 60 Opal SLS Surface		Pendant				
Surface	Pendant					
G060124SOMN	G060124SOMP	1x14/24W	G5 SLS	L:	588	
G060139SOMN	G060139SOMP	1x21/39W	G5 SLS	L:	888	
G060154SOMN	G060154SOMP	1x28/54W	G5 SLS	L:	1188	
G0601139SOMN	G0601139SOMP	1+1x21/39W	G5 SLS	L:	1772	
G0601154SOMN	G0601154SOMP	1+1x28/54W	G5 SLS	L:	2372	

With integral electronic control gear 220-240V 50/60Hz.

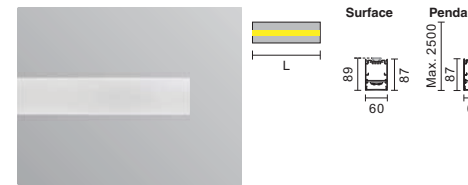


Gola 60 Opal LED Surface		Pendant				
Surface	Pendant					
G060140BOMN	G060140BOMP	-K30 40W	LED 3000K 2400lm	L:	588	LED
G060140BOMN	G060140BOMP	-K40 40W	LED 4000K 2600lm	L:	588	
G060160BOMN	G060160BOMP	-K30 60W	LED 3000K 3600lm	L:	888	
G060160BOMN	G060160BOMP	-K40 60W	LED 4000K 3900lm	L:	888	
G060180BOMN	G060180BOMP	-K30 80W	LED 3000K 4800lm	L:	1188	
G060180BOMN	G060180BOMP	-K40 80W	LED 4000K 5200lm	L:	1188	
G0601100BOMN	G0601100BOMP	-K30 100W	LED 3000K 6000lm	L:	1488	
G0601100BOMN	G0601100BOMP	-K40 100W	LED 4000K 6500lm	L:	1488	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.
 CRI>80.
 Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.
 Other colour temperature K or CRI are available upon request.

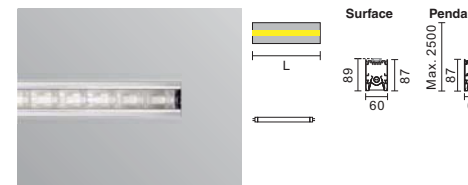

Gola 60 Dark T5 Surface		Pendant				
Surface	Pendant					
G060139TDMN	G060139TDMP	1x21/39W	G5 T5	L:	888	
G060154TDMN	G060154TDMP	1x28/54W	G5 T5	L:	1188	
G060180TDMN	G060180TDMP	1x35/49/80W	G5 T5	L:	1488	

With integral electronic control gear 220-240V 50/60Hz.

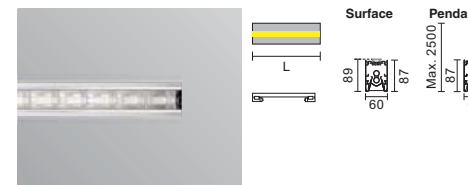

Gola 60 Dark SLS Surface		Pendant				
Surface	Pendant					
G060139SDMN	G060139SDMP	1x21/39W	G5 SLS	L:	888	
G060154SDMN	G060154SDMP	1x28/54W	G5 SLS	L:	1188	

With integral electronic control gear 220-240V 50/60Hz.