



# Gola 95

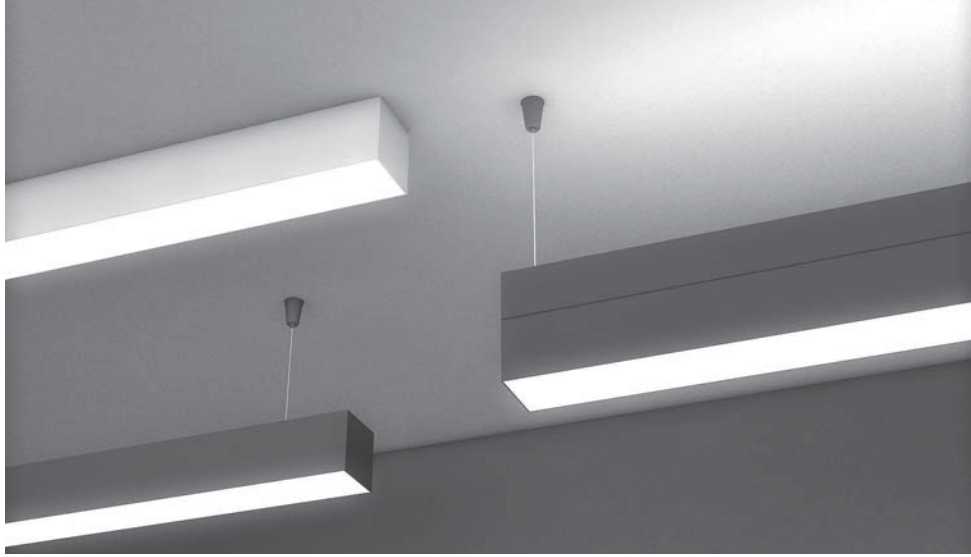

## Related products:



**GOLA 40** P.262-263  
**GOLA 60** P.264-265  
**GOLA 160** P.270-271  
**GOLA Systems** P.298-311


## Features IP20

- Linear Pendant/Ceiling mounted luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Cable and stainless steel adjustable wire suspensions with canopy are included and ready for electrical connection.
- Available in 4 aperture widths (40-60-95-160mm) and in versions of indirect, direct/indirect and direct modular lighting system.
- System versions can be configured into linear I, 90° L, T and X shapes or other custom configuration (details are all by request).
- Gimbal rotatable and pivotable light heads unit for Low Voltage Halogen, Metal Halide or LED can be incorporated only on Gola 95 or 160 by request.
- Staggered lamplung include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louwer by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- For Fluorescent lamps, Dimmable and Emergency versions available upon request.
- Designed and manufactured to comply with European standard EN 60598.

## Applications

- Gola Pendant and Surface mounting, suitable for continuous runs are a true performance linear luminaries that allows the user to install fewer fixtures in a space while improving the quality of light output. High quality T5 or LED light sources combine with optical reflectors or diffuser offering a wide range of designs and light configurations options, the diminutive shape it adds a new level of style to interiors.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, boardrooms, stairwells, hallways, cafes, restaurants and hotels.

Complete with end caps and accessories for surface or pendant mounting.

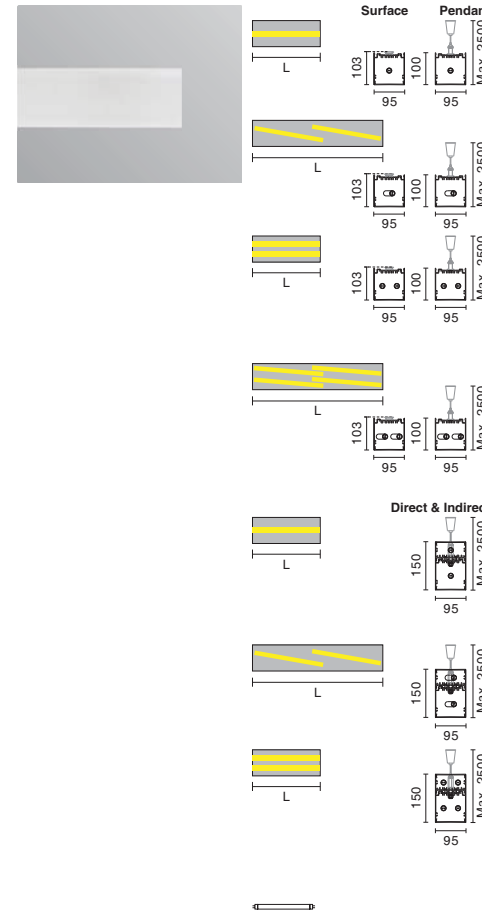

## Gola 95 Opal T5

Surface	Pendant				
G095124TOMN	G095124TOMP	1x24W	G5 T5	L:	588
G095139TOMN	G095139TOMP	1x21/39W	G5 T5	L:	888
G095154TOMN	G095154TOMP	1x28/54W	G5 T5	L:	1188
G095180TOMN	G095180TOMP	1x35/49/80W	G5 T5	L:	1488

G0951139TOMN	G0951139TOMP	1+1x21/39W	G5 T5	L:	1656
G0951154TOMN	G0951154TOMP	1+1x28/54W	G5 T5	L:	2256
G0951149TOMN	G0951149TOMP	1+1x35/49W	G5 T5	L:	2856
G0951180TOMN	G0951180TOMP	1+1x80W	G5 T5	L:	2856

G095224TOMN	G095224TOMP	2x24W	G5 T5	L:	588
G095239TOMN	G095239TOMP	2x21/39W	G5 T5	L:	888
G095254TOMN	G095254TOMP	2x28/54W	G5 T5	L:	1188
G095249TOMN	G095249TOMP	2x35/49W	G5 T5	L:	1488
G095280TOMN	G095280TOMP	2x80W	G5 T5	L:	1488

G0952239TOMN	G0952239TOMP	2+2x21/39W	G5 T5	L:	1656
G0952254TOMN	G0952254TOMP	2+2x28/54W	G5 T5	L:	2256
G0952249TOMN	G0952249TOMP	2+2x35/49W	G5 T5	L:	2856
G0952280TOMN	G0952280TOMP	2+2x80W	G5 T5	L:	2856

With integral electronic control gear 220-240V 50/60Hz.


## Pendant Direct & Indirect

G0951DI24TOUP	1D+1x24W	G5 T5	L:	648
G0951DI39TOUP	1D+1x21/39W	G5 T5	L:	948
G0951DI54TOUP	1D+1x28/54W	G5 T5	L:	1248
G0951DI49TOUP	1D+1x35/49W	G5 T5	L:	1548
G0951DI80TOUP	1D+1x80W	G5 T5	L:	1548

G09511DI39TOUP	1+1D+1x21/39W	G5 T5	L:	1832
G09511DI54TOUP	1+1D+1x28/54W	G5 T5	L:	2432
G09511DI49TOUP	1+1D+1x35/49W	G5 T5	L:	3032
G09511DI80TOUP	1+1D+1x80W	G5 T5	L:	3032

G0952DI24TOUP	2D+2x24W	G5 T5	L:	648
G0952DI39TOUP	2D+2x21/39W	G5 T5	L:	948
G0952DI54TOUP	2D+2x28/54W	G5 T5	L:	1248
G0952DI49TOUP	2D+2x35/49W	G5 T5	L:	1548
G0952DI80TOUP	2D+2x80W	G5 T5	L:	1548


Opal diffuser on both Direct and Indirect emission.  
 With integral electronic control gear 220-240V 50/60Hz.

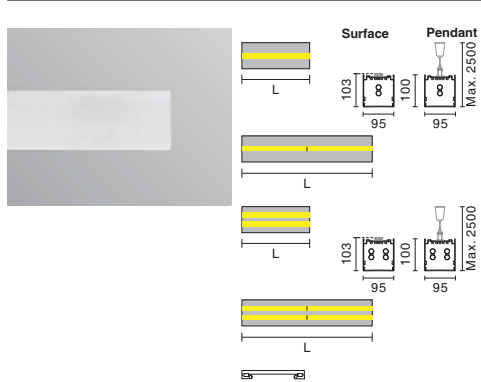

**Gola 95 Opal SLS**

Surface	Pendant				
G095124SOMN	G095124SOMP	1x14/24W	G5 SLS	L: 588	
G095139SOMN	G095139SOMP	1x21/39W	G5 SLS	L: 888	
G095154SOMN	G095154SOMP	1x28/54W	G5 SLS	L: 1188	
G0951139SOMN	G0951139SOMP	1+1x21/39W	G5 SLS	L: 1772	
G0951154SOMN	G0951154SOMP	1+1x28/54W	G5 SLS	L: 2372	
G095224SOMN	G095224SOMP	2x14/24W	G5 SLS	L: 588	
G095239SOMN	G095239SOMP	2x21/39W	G5 SLS	L: 888	
G095254SOMN	G095254SOMP	2x28/54W	G5 SLS	L: 1188	
G0952239SOMN	G0952239SOMP	2+2x21/39W	G5 SLS	L: 1772	
G0952254SOMN	G0952254SOMP	2+2x28/54W	G5 SLS	L: 2372	

With integral electronic control gear 220-240V 50/60Hz.

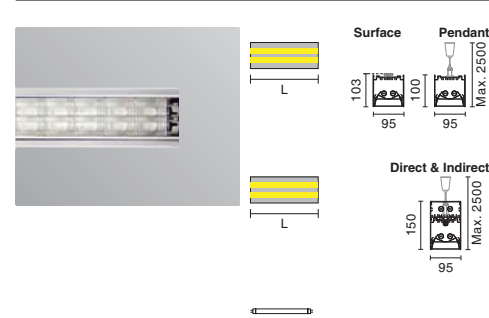


**Gola 95 Dark T5**

Surface	Pendant				
G095239TDMN	G095239TDMP	2x21/39W	G5 T5	L: 888	
G095254TDMN	G095254TDMP	2x28/54W	G5 T5	L: 1188	
G095249TDMN	G095249TDMP	2x35/49W	G5 T5	L: 1488	
G095280TDMN	G095280TDMP	2x80W	G5 T5	L: 1488	

With integral electronic control gear 220-240V 50/60Hz.

Pendant Direct & Indirect					
G0952DI39TDUP		2D+2lx21/39W	G5 T5	L: 948	
G0952DI54TDUP		2D+2lx28/54W	G5 T5	L: 1248	
G0952DI49TDUP		2D+2lx35/49W	G5 T5	L: 1548	
G0952DI80TDUP		2D+2lx80W	G5 T5	L: 1548	

Dark louver for Direct and Opal diffuser for Indirect emission.  
With integral electronic control gear 220-240V 50/60Hz.

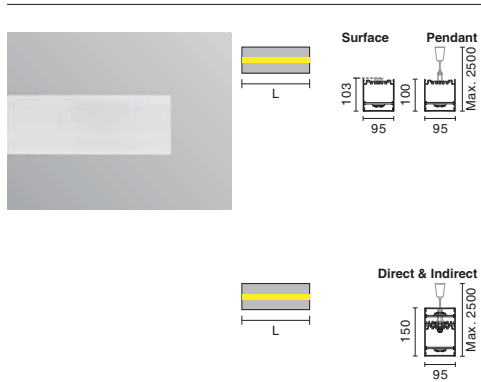


**Gola 95 Opal LED**

Surface	Pendant				
G095140BOMN	G095140BOMP	-K30 40W LED	3000K 2400lm	L: 588	LED
G095140BOMN	G095140BOMP	-K40 40W LED	4000K 2600lm	L: 588	
G095160BOMN	G095160BOMP	-K30 60W LED	3000K 3600lm	L: 888	
G095160BOMN	G095160BOMP	-K40 60W LED	4000K 3900lm	L: 888	
G095180BOMN	G095180BOMP	-K30 80W LED	3000K 4800lm	L: 1188	
G095180BOMN	G095180BOMP	-K40 80W LED	4000K 5200lm	L: 1188	
G0951100BOMN	G0951100BOMP	-K30 100W LED	3000K 6000lm	L: 1488	
G0951100BOMN	G0951100BOMP	-K40 100W LED	4000K 6500lm	L: 1488	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.  
CRI>80.  
DALI/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.  
Other colour temperature K or CRI are available upon request.

Pendant Direct & Indirect					
G0951DI40BOUP-K30		1D+1x40W LED	3000K 2x2400lm	L: 648	LED
G0951DI40BOUP-K40		1D+1x40W LED	4000K 2x2600lm	L: 648	
G0951DI60BOUP-K30		1D+1x60W LED	3000K 2x3600lm	L: 948	
G0951DI60BOUP-K40		1D+1x60W LED	4000K 2x3900lm	L: 948	
G0951DI80BOUP-K30		1D+1x80W LED	3000K 2x4800lm	L: 1248	
G0951DI80BOUP-K40		1D+1x80W LED	4000K 2x5200lm	L: 1248	
G0951DI100BOUP-K30		1D+1x100W LED	3000K 2x6000lm	L: 1548	
G0951DI100BOUP-K40		1D+1x100W LED	4000K 2x6500lm	L: 1548	

Opal diffuser on both Direct and Indirect emission.  
Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.  
CRI>80.  
DALI/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.  
Other colour temperature K or CRI are available upon request.

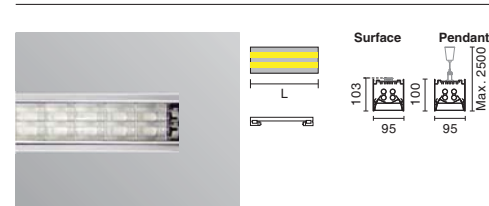

**Gola 95 Dark SLS**

Surface	Pendant				
G095239SDMN	G095239SDMP	2x21/39W	G5 SLS	L: 888	
G095254SDMN	G095254SDMP	2x28/54W	G5 SLS	L: 1188	

With integral electronic control gear 220-240V 50/60Hz.