


LED


JOKER

design Roberto Fiorato




h 0,5 m

A family of products suitable for outdoor installation for surface, recessed, and post top mounting. The compact size of the JOKER WALL is ideal for installations where it is not possible to recess the fittings, in both public and residential applications. The range includes wall mounted versions multi-directional light rays and coloured LED's. JOKER fittings are also suitable for halogen lamp sources. The flexibility of the range provides the designer and installer with a variety of options to meet the demands of the project from pathway lighting to accent and feature lighting in public areas.

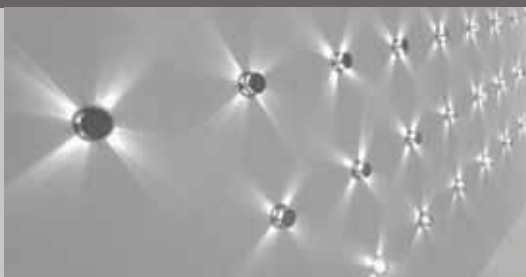

The Joker Ray screen combined with the lenticular clear glass divides the light into four 90° angled beams. Ideal to create effects on walls, or to underline architectural details.

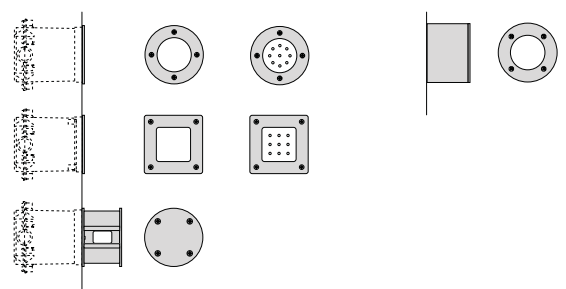



JOKER TONDO

LUMINAIRE THAT REQUIRES A FIXING KIT FOR INSTALLATION

JOKER TONDO S
JOKER TONDO F

	G4	max 1x20 W HSG
	G9	1x25 W HSG

JOKER TONDO S LED

	9 LED - 2 W
--	-------------

- Range of recessed luminaires for wall mounted applications, comprising:
- Low protrusion recessed body made of V-0 rated self-extinguishing technopolymer (to be ordered separately). The recessed body is supplied complete with a protective cover allowing all masonry work necessary to a proper installation. After the masonry work, remove the cover and insert the gear body into the recessed body
 - Gear body complete with:
 - Round or square shaped diffuser, satin tempered glass for "S" versions featuring diffused lighting, transparent prismatic tempered glass for "F" versions featuring asymmetric light
 - Aluminium reflector for G9 version
 - Silicone gasket
 - Stainless steel covers and locking screws
 - LED versions include 220/240 V 50/60 Hz safety transformer
 - The complete fitting comprises one lamp/gear assembly and one recessing body



Joker Tondo F
A clear toughened Fresnel lens directs the light output. Ideal for selective lighting, to attract attention, for pathways and stairways illumination.

lampholder	W	ILCOS	colour	class	IP			Kelvin		$\cos \varphi \geq 0,9$	EEL	code	notes
------------	---	-------	--------	-------	----	--	--	--------	--	-------------------------	-----	------	-------

JOKER TONDO S

Halogen

G4	max 1x20 W	HSG	SS1	III	55	• •						IK06 1J xx3	006894
G9	1x25 W	HSG	SS1	I	55	• •	2900					IK06 1J xx3	006893

JOKER TONDO F

Halogen


G4	max 1x20 W	HSG	SS1	III	55	• •						IK06 1J xx3	006896
G9	1x25 W	HSG	SS1	I	55	• •	2900					IK06 1J xx3	006895

JOKER TONDO S LED


LED voltage 220/240 V 50/60 Hz

9 LED - 2 W			SS1+WHL	I	55	• •	6000					IK06 1J xx3	006897
-------------	--	--	---------	---	----	-----	------	--	--	--	--	-------------	--------


If information about Kelvin degrees is provided, this means that the lamp is included.



description	colour	code
JOKER TONDO recessing body		000932

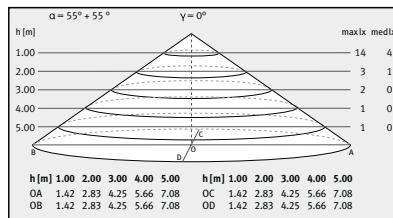

JOKER TONDO S 1x25 W HSG

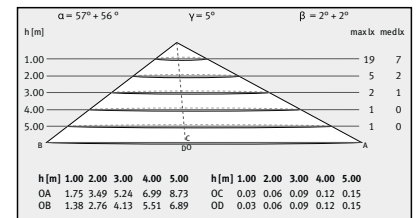

JOKER TONDO F 1x25 W HSG

SS1



SS1+WHL

COMPLETE UNIT

1A+1B = please order 2 codes

COMPONENTS

- A gear body
- B body





JOKER QUADRO

LUMINAIRE THAT REQUIRES A FIXING KIT FOR INSTALLATION

JOKER QUADRO S

	G4	max 1x20 W HSG
	G9	1x25 W HSG

JOKER QUADRO S LED

	9 LED - 2 W
--	-------------



lampholder	W	ILCOS	colour	class	IP	Kelvin	$\text{Cos } \varphi \geq 0,9$	EEL	code	notes
------------	---	-------	--------	-------	----	--------	--------------------------------	-----	------	-------

JOKER QUADRO S

Halogen


G4	max 1x20 W	HSG	SS1	III	55	• •			IK06 1J xx3	006904
G9	1x25 W	HSG	SS1	I	55	• •	2900		IK06 1J xx3	006903

JOKER QUADRO S LED


LED voltage 220/240 V 50/60 Hz

9 LED - 2 W		SS1+WHL	I	55	• •	6000			IK06 1J xx3	006905
-------------	--	---------	---	----	-----	------	--	--	-------------	--------

If information about Kelvin degrees is provided, this means that the lamp is included.



description	colour	code
JOKER QUADRO recessing body		000933

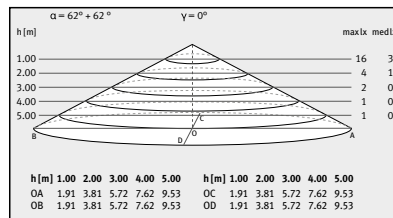

JOKER QUADRO S 1x25 W HSG

COMPLETE UNIT

1A+1B = please order 2 codes

COMPONENTS

- A gear body
- B body

