





KHAslim lean profile bollards available in stainless steel or extruded aluminium as follows:
 KHAslim MT; suitable for 20W CDM-TM metal halide lamps, full cut-off zero upward light pollution, ground mounted. Available range: 20W CDM-TM (310mm, 950mm or 2200mm height)
 KHA-Slim FLUO; suitable for compact fluorescent lamps, 360° light emission, ground mounted. Available range: 10W TC-D (350mm height), 55/80w TC-L (2500mm height).
 KHAwall; wall mounted version, 360° wall washing radiated light. Available range: 25/40W G9 base mains voltage tungsten halogen.

- Body and top cover in AISI 316 stainless steel or aluminium polyester powder coated, black or grey sanded finished.
- UV stabilised high-tech techno polymer impact resistant lamp cover (PC-HT).
- High purity aluminium reflectors provide comfortable low glare light control and avoid reflection back onto lamp to improve its longevity.
- Techno polymer gear housing.
- Models with 220cm and 250cm height are complete with fast and simple PA66 IP68 plug for electrical connection, suitable to take up to 3x1,5/2,5 mm² cables Ø9-14mm.
- Models with 31/35cm and 93cm height have a polyamide connection box provided with M16x1.5 anti tearing IP68 cable gland, for Ø5-10mm cables.
- 220-240V, 50/60Hz supply electronic control gear.
- Anti-ageing silicone rubber gaskets.
- Stainless steel external screw fixings.

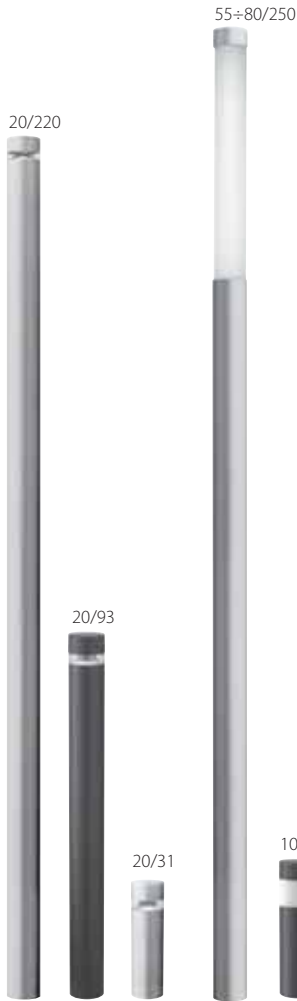

KHAslim MT 20W - CDM-Tm


Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Code	Notes
PGJ5	20W	MT	C	81	II	ETRC	•	05192681	☞ H 31cm	
PGJ5	20W	MT	C	96	II	ETRC	•	05192596	☞ H 31cm	
PGJ5	20W	MT	C	81	II	ETRC	•	05192981	☞ H 93cm	
PGJ5	20W	MT	C	96	II	ETRC	•	05192896	☞ H 93cm	
PGJ5	20W	MT	C	81	II	ETRC	•	05193281	☞ ! H 220cm	
PGJ5	20W	MT	C	96	II	ETRC	•	05193196	☞ ! H 220cm	
PGJ5	20W	MT	C	04	II	ETRC	•	05192704	☞ H 31cm	
PGJ5	20W	MT	C	04	II	ETRC	•	05193004	☞ H 93cm	
PGJ5	20W	MT	C	04	II	ETRC	•	05193304	☞ ! H 220cm	



- ☞ Complete with electronic ballast non dimmable 220-240V 50/60hz.
- ! Versions for 2200 mm heights are supplied without fixing base. Ground mounting accessories A0373 and A0370 are available to order.

KHAslim FLUO 10W DULUX-D-E / 55-80W DULUX-L

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Code	Notes
G24q-1	10W	FSQ	C	81	II	ETRC	A3	05192081	☞ H 35cm	
G24q-1	10W	FSQ	C	96	II	ETRC	A3	05191996	☞ H 35cm	
2G11	55-80W	FSD	C	81	II	ETRC	•	05194181	☞ ! H 250cm	
2G11	55-80W	FSD	C	96	II	ETRC	•	05194096	☞ ! H 250cm	
G24q-1	10W	FSQ	C	04	II	ETRC	A3	05192104	☞ H 35cm	
2G11	55-80W	FSD	C	04	II	ETRC	•	05194204	☞ ! H 250cm	



- ☞ Complete with electronic ballast non dimmable 220-240V 50/60hz.
- ! Versions for 2500 mm heights are supplied without fixing base. Ground mounting accessories A0373 and A0370 are available to order.



KHAwall 20W CDM-Tm / 25W Halopin

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Code	Notes
G9	25W	HSGST	C	04	II				01036127	!1
G9	25W	HSGST	C	81	II				01036081	!1
G9	25W	HSGST	C	96	II				01035996	!1
PGJ5	20W	MT	C	04	II	ETRC			03003827	☞ !2
PGJ5	20W	MT	C	81	II	ETRC			03003781	☞ !2
PGJ5	20W	MT	C	96	II	ETRC			03003696	☞ !2



- ☞ !2 Class I remote gear versions are supplied with electronic control gear box and 3m cable for connection to fitting. The remote gear box should be installed in a suitable location at a maximum distance of 3m from the fitting.
- !1 Mains voltage tungsten halogen version for max. 250V, 50/60Hz supply (Class II).

