


# LinkLED



## Related products:

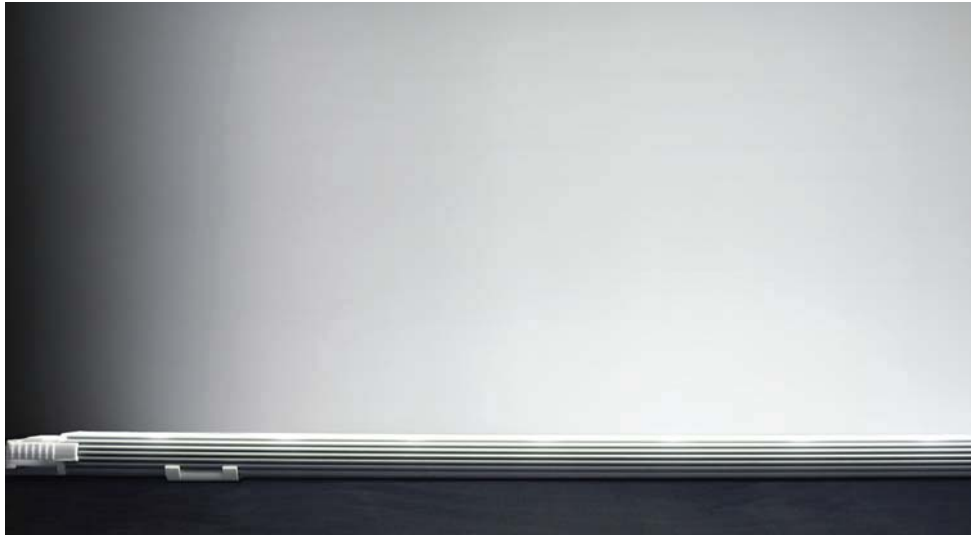

**DIVA 2** P.212-215  
**DIVA 2 DUAL** P.216-219  
**DIVA 2 HO** P.216-219  
**FESTOONLED** P.204-205  
**FLEXSTRIPLED** P.206-207  
**MICRO STRIPLED** P.210-211  
**TUNELIGHT 2** P.220-221

## Features

IP40

- Surface mounted LED linkable system.
- Housing made of extrusion aluminium designed for optimal passive thermal management.
- End Caps made of heat resistance thermoplastic.
- Diffuser made of tempered glass with special black texture.
- Available in 2 lengths 560mm and 960mm.
- Supplied with Snap-in mounting brackets for various fixing applications.
- Easy push and lock action for connecting together LinkLED fixtures.
- Built-in 220-240V 50/60Hz power driver. Can be linkable up to 630W.
- Light source is LED with 40.000 hrs rated life.
- Long life LED light source provides IR and UV free emission.
- Collimating lens made of optical polymer with different beam optics.
- Designed and manufactured to comply with European standard EN 60598.

## Applications


- LinkLED has an exciting new look. Radius is sleek and streamlined with a soft rounded style. Its slim compact dimensions allows it to virtually disappear into the space.
- Designed to suit the under shelf and cove light applications, it has the advantages of being available in different lengths and include latest advanced technology of LED light sources.
- Application areas: cabinet displays, showcases, under-cabinet, under-shelf, retail, residential, restaurants, galleries, museums, showrooms. Highly recommended for illuminating heat sensitive products.



Perfect straight linkage



Colour 11



## LinkLED

<b>4201-K33D45</b>	With 7x1W LED 3300K 420lm	L: 560		45°
<b>4201-K68D45</b>	With 7x1W LED 6800K 460lm	L: 560		45°
<b>4202-K33D45</b>	With 12x1W LED 3300K 720lm	L: 960		45°
<b>4202-K68D45</b>	With 12x1W LED 6800K 780lm	L: 960		45°

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80. Other beam optics or colour temperatures K or CRI are available upon request. Snap-in mounting brackets for plane or 45° applications are included. Max. connection 630W in one row.

## Accessories



**2392 Power Cord** L:1800  
With plug



**2399 Flexible Connector** L: 370  
With M/F plugs

## Mounting Applications

