


Metroluce

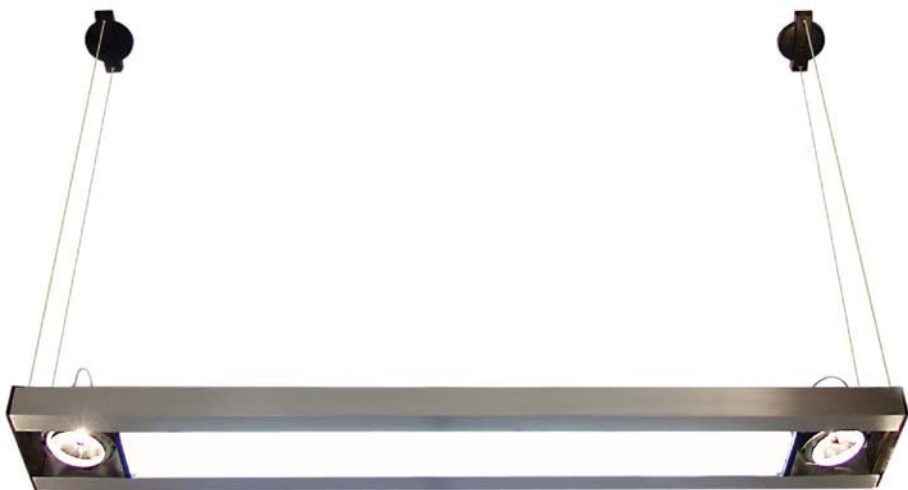

Ceiling base for power supply and suspension wire

Features IP20


- Pendant direct/indirect luminaire.
- Spots to move in all directions via movable gimbals.
- Structure is made of extrusion aluminium and thermoplastic injected mold end cups. Control gear is housed inside the aluminium structure.
- Gimbals (when incorporated) are made of die cast aluminium.
- Fixture is available in 2 shade versions with dark light parabolic cell louvers or with the diffuser made of satin acrylic.
- The fixtures are supplied with ceiling cup and with pre-installed 1.5 meter electrical cable with 2 x 1.5 meter of pendant steel wires.
- Easy relamping via removable front gimbal part or parabolic louvers or acrylic diffuser by snap-in catch action.
- Light sources include Metal Halide, Halogen, Fluorescent and LED.
- Long life LED light source provide IR and UV free emission.
- Super pure aluminium dark light optic parabolic cell louvers.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- Metroluce is ideal for intensive VDU areas and is available in various sizes and configurations.
- Application areas: retail, department stores, galleries, shopping centers, showrooms, schools, community buildings, supermarkets residential, restaurants, offices.



Colour 75



Metroluce Diffuser + Spots

7052 2x39W G5 T5 + 2x75W AR111 Hal. L:1250
or 2x15W AR111 LED

7056 2x54W G5 T5 + 2x75W AR111 Hal. L:1550
or 2x15W AR111 LED

With integral electronic control gear 220-240V 50/60Hz and electronic transformer 220-240/12V 50/60Hz.


Diffuser in satin methacrylate.
With multidirectional Gimbalto spots.

7054 2x39W G5 T5 + 2x35W GX8.5 CDM-R111 L:1250

7058 2x54W G5 T5 + 2x35W GX8.5 CDM-R111 L:1550

With integral electronic control gear 220-240V 50/60Hz.

Diffuser in satin methacrylate.
With multidirectional Gimbalto spots.



Metroluce VDU dark light optic + Spots

7053 2x39W G5 T5 + 2x75W AR111 Hal. L:1250
or 2x15W AR111 LED

7057 2x54W G5 T5 + 2x75W AR111 Hal. L:1550
or 2x15W AR111 LED

With integral electronic control gear 220-240V 50/60Hz and electronic transformer 220-240/12V 50/60Hz.


VDU dark light optic.
With multidirectional Gimbalto spots.

7055 2x39W G5 T5 + 2x35W GX8.5 CDM-R111 L:1250

7059 2x54W G5 T5 + 2x35W GX8.5 CDM-R111 L:1550

With integral electronic control gear 220-240V 50/60Hz.

VDU dark light optic.
With multidirectional Gimbalto spots.




Metroluce Diffuser

7060 2x39W G5 T5 L: 920

7061 2x54W G5 T5 L:1220

With integral electronic control gear 220-240V 50/60Hz.
Diffuser in satin methacrylate.



Metroluce VDU dark light optic

7062 2x39W G5 T5 L: 920

7063 2x54W G5 T5 L:1220

With integral electronic control gear 220-240V 50/60Hz.
VDU dark light optic.