

Mondo Due



Related products:



MONDO
P.168-171

MONDO DUE
Surface Mounted
P.238-241



Features IP20


- Track mounted spotlight with versatile aiming angle of 0°-85° vertical tilting with 350° horizontal rotation adjustability.
- Light head and control gear housing are made of die cast aluminium.
- Fixture is available in 2 different sizes.
- Track adaptor is the three circuit universal type.
- Easy relamping via removable front housing by twist and lock action.
- Flexibility to add optical accessories that can fit in firm position.
- Provides user with ultimate flexibility of firm lamp position and acceptance of optical internal (can fit up to 3 flat accessories combined) and external accessories as listed.
- Light sources include Low Voltage Halogen, Metal Halide and LED.
- Long life LED light source providing IR and UV free emission.
- LED Optical grade metalized polycarbonate reflectors with different beam optics are available.
- Super pure aluminium reflectors with different beam optics are available.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- Mondo Due is a simple cylinder design and feature crisply defined shape, concealed fasteners and wiring. For a concept in spotlight with continuous line applications for benefit of increasing the possibility of display lighting using a variety of lamp type options.
- Application areas: retail, department stores, galleries, museums, shopping centers, showrooms, residential, restaurants, hotels, exhibitions, window displays.



Colour

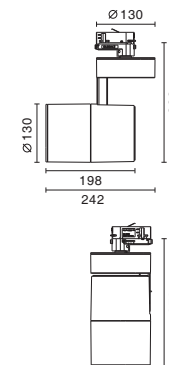

Mondo Due

6334	35W	G12	CDM-T	M.H.		10°
6335	35W	G12	CDM-T	M.H.		40°
6290	70W	G12	CDM-T	M.H.		10°
6291	70W	G12	CDM-T	M.H.		40°

Safety glass included.
With integral electronic control gear 220-240V 50/60Hz.

6340	12W	E27	PAR30	LED		
6339	70W	E27	PAR30	CDM-R	M.H.	
6336	35W	GX8.5	CDM-R111	M.H.		
6337	70W	GX8.5	CDM-R111	M.H.		

With integral electronic control gear 220-240V 50/60Hz.

6338	75W	G53	AR111	Hal.		
	15W	G53	AR111	LED		

With integral electronic transformer 220-240V 50/60Hz.


6341-K30D15	With 38W LED	3000K	3000lm		15°	LED
6341-K40D15	With 38W LED	4000K	3200lm		15°	
6341-K30D24	With 38W LED	3000K	3000lm		24°	
6341-K40D24	With 38W LED	4000K	3200lm		24°	
6341-K30D36	With 38W LED	3000K	3000lm		36°	
6341-K40D36	With 38W LED	4000K	3200lm		36°	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.

CR1>80.

Leading-Trailing edge dimmable driver option upon request.

Other colour temperatures K or CRI are available upon request.



Mini Mondo Due

6376-K30D15	With 26W LED	3000K	2000lm		15°	LED
6376-K40D15	With 26W LED	4000K	2200lm		15°	
6376-K30D24	With 26W LED	3000K	2000lm		24°	
6376-K40D24	With 26W LED	4000K	2200lm		24°	
6376-K30D40	With 26W LED	3000K	2000lm		40°	
6376-K40D40	With 26W LED	4000K	2200lm		40°	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.






CR1>80.

Leading-Trailing edge dimmable driver option upon request.

Other colour temperatures K or CRI are available upon request.









Accessories Table

					
	Coloured Filters Colours 25, 42, 55, 85	Honeycomb Louvre Colour 10	Anti-glare Tube Colours 10, 11, 75	Directional Flaps Colour 10	Wallwasher Visor Colour 10

Light Source

Mondo Due

G12 CDM-T					
E27 PAR30 CDM-R					
E27 PAR30 LED					
G53 AR111					
G53 AR111 LED					
GX8.5 CDM-R111					

38W LED	2340	2320	2347	2319	2385
---------	------	------	------	------	------

Mini Mondo Due

26W LED	2695	2693	2694	2692	2386
---------	------	------	------	------	------

Possibility to use up to 3 flat accessories combined.

