

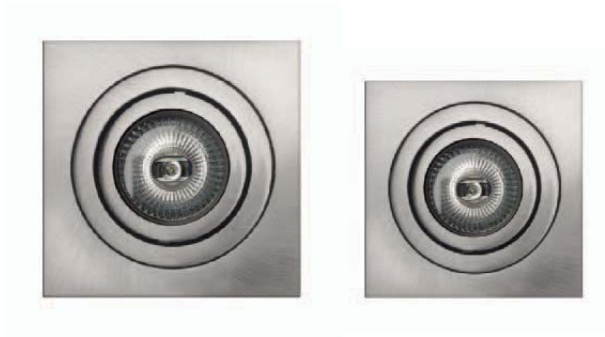


Multiquadro



Multiquadro
Recessed adjustable and rotatable square downlights.

- Features**
- Versatile aiming angles: 0° - 40° vertical tilting and 350° horizontal rotation adjustability.
 - Made of die cast aluminum.
 - Installation springs suitable for ceiling thickness up to max 25mm.
 - Metal halide light source option available, control gear is not included. To be ordered separately.
 - Designed and manufactured to comply with European standard EN 60598.

- Applications**
- This series of low voltage and main voltage downlights are designed to deliver superior performance, maximum versatility with fast-easy installation and allow lamp aiming while the power is on.
 - Application areas: commercial, window displays, retail, residential, galleries, small corridors, exhibits, museums, showrooms.




Multiquadro 11

5138 35W 12V GU4 Mr11
4W 12V GU4 MR11

Transformer not included. To be ordered separately.

IP20



Multiquadro 16

5139 50W 12V GU5.3 MR16 Hal.

Transformer not included. To be ordered separately.

IP20



Accessories



Anti-glare Cone

2080 For: 5138

2081 For: 5139

Vertical tilting angle reduced to 15° with anti-glare cone.
Available in colour 10



Kit for GU10/GZ10

2252

50W GU10/GZ10

For: 5139



Honeycomb Louvre

2152

For: 5139

Available in colour 10



Kit for GX10 MR16 M.H.

2253

20/35W GX10 MR16 Metal halide

For: 5139

Emergency Kit

For details, please see p.291