



MYRA 12 street lighting fitting for pole top or side entry mounting with high performance optics suitable for street lighting, side roads and residential lighting.

Complete with a full "cut-off" reflector for precise control providing a lighting solution in accordance with the relevant standards for zero upward light pollution.

Myra 12 is available with the following cover options:

MYRA 12/PMMA - methacrylate cover.

MYRA 12/V - flat safety glass (17J) cover.

- Die cast aluminium pole clamp finished light grey for pole top and side arm installations, suitable for Ø42-60mm poles.
- Stainless steel pole fixing bolt.
- Body in light grey technopolymer.
- Removable easy access control gear tray and lampholder assembly
- Quick release aluminium cover clips. Cover hinges to body for easy maintenance.
- Reflector in high purity aluminium anodised and polished. External surface finished polyester powder coated light grey.
- Anti-ageing dual foam silicone gasket, factory injection direct to glass.



MYRA 12/V

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
E27	80÷125W	QE		SR	90	II	CR			• 05055990	
E27	70W	SE/I		SR	90	II	CR			• 05056090	⚠
E27	70W	ST-MT		SR	90	II	CR			• 05082390	
E40	100W	SE-ST-MT		SR	90	II	CR			• 05056190	
E40	150W	SE-ST-MT		SR	90	II	CR			• 05056290	
E40	250W	QE		SR	90	II	CR			• 05056390	
E40	250W	SE-ST-MT		SR	90	II	CR			• 05056490	
GX24q-4	42W	FSM	4000°	SR	90	II	ETRC	A2		• 05058890	⚡
ZG11	2x18W	FSD	4000°	SR	90	II	CR	B2		• 05059190	
E27	70W	SE/I		SR	90	II	CRL			• 07013890	💡
E40	100W	ST		SR	90	II	CRL			• 07013990	💡
E40	150W	ST		SR	90	II	CRL			• 07014090	💡
E40	250W	ST		SR	90	II	CRL			• 07014190	💡



⚡ Complete with electronic ballast non dimmable 220-240v 50/60hz.

⚠ For lamps with integral ignitor.

💡 Fittings supplied complete with lamp.



MYRA 12/PMMA


Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
E27	80÷125W	QE		SR	90	II	CR			• 05050399	
E27	70W	SE/I		SR	90	II	CR			• 05050099	⚠
E27	70W	ST-MT		SR	90	II	CR			• 05052690	
E40	100W	SE-ST-MT		SR	90	II	CR			• 05050199	
E40	150W	SE-ST-MT		SR	90	II	CR			• 05050299	



⚠ For lamps with integral ignitor.

CLASS II		90					FSD 18W DULUX L PL-L	FSMH 42W DULUX T/E PL-T	SE/I max 70W NAV-E/I SON/I	QE max 250W HQL HPL-N	SE max 250W NAV-E SON	ST max 250W NAV-T SON-T	MT max 250W CDO-TT HQI-T/D
							H05RN-F 2x1 						

Fitting adjustable from horizontal (parallel to ground) 0° to +12°.

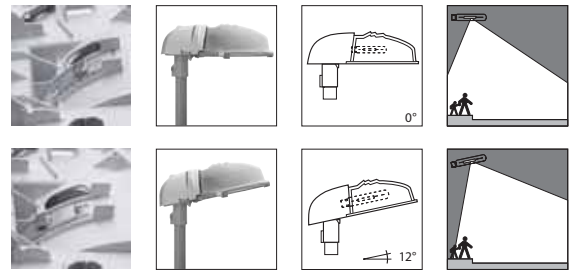

The innovative "V" shape facets produce a very high performance with high visual comfort complying with CIE 31 norms.



ACCESSORIES

A0188 	A0042 88 141 120 8xØ10
------------------	---

Code	Denomination	Colour	Description	Packing
14006320	A0188		Plug and socket terminal factory fitted on request.	
14152017	A0042	90	Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester painted light grey.	■

■ Minimum order 10 pcs. or multiple quantities thereof.