



QUATRIX

design Roberto Fiorato



QUATRIX is also available
in emergency models
(QUATRIX EM/3P - QUATRIX A EM/3P).




QUATRIX luminaires can be
fitted with a choice screens
that can be customised with
decorations or monograms
upon request.

Series of indoor/outdoor wall luminaires with different screens, also available with pictograms or customisations upon request (QUATRIX and QUATRIX K models). QUATRIX has a thick glass diffuser, internally painted for soft, even lighting.






The screens, base and the bars that hold the glass in place are in die-cast aluminium.

Models A, G and K are available with finishes that go well with natural materials.

The simple and modern geometric shape, with colours sympathetic to traditional architecture make the QUATRIX an ideal choice for architecturally restored buildings, general area lighting, hotels and public buildings.

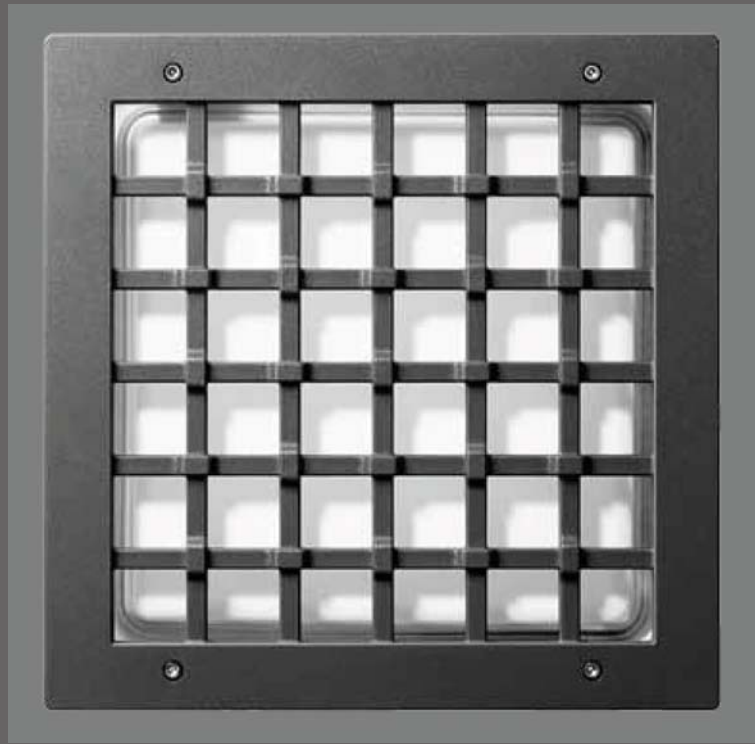





K model screens can be customised on demand with logos, signs and decorations.




QUATRIX A

QUATRIX A

	E27	max 1x100 W IAA
	E27	max 1x21 Dulux EL Longlife max 1x23 PHILIPS PL-E
	G24q-2	2x18 W FSQ
	GR10q	1x28 W FSS

QUATRIX A EM 3P

	GR10q	1x16 W FSS
--	-------	------------

- Wall mounted luminaire for exterior and interior use comprising:
- Painted die cast aluminium housing and frames
 - Glass diffuser, internally painted for homogeneous diffused light
 - Polymer gasket
 - Compact fluorescent versions are provided with low loss ballast
 - Wall-mounting only



lampholder	W	ILCOS	colour	class	IP		Kelvin		Cos φ	EEL	code	notes
------------	---	-------	--------	-------	----	---	--------	---	-------	-----	------	-------

QUATRIX A

E27	max 1x100 W IAA	GR3		I	64	• •						006400
E27	max 1x100 W IAA	AN3		I	64	• •						006401
E27	max 1x100 W IAA	RB1		I	64	• •						006402

Fluorescent - electronic ballast 220/240 V 50/60 Hz




G24q-2	2x18 W	FSQ	GR3	I	64	• •	2700				IK05 0,70J xx3 • A2	056406
G24q-2	2x18 W	FSQ	AN3	I	64	• •	2700				IK05 0,70J xx3 • A2	056407
G24q-2	2x18 W	FSQ	RB1	I	64	• •	2700				IK05 0,70J xx3 • A2	056408

Fluorescent - magnetic ballast 230 V 50 Hz

GR10q	1x28 W	FSS	GR3	I	64	• •	2700				IK05 0,70J xx3 • ≤B2	006409
GR10q	1x28 W	FSS	AN3	I	64	• •	2700				IK05 0,70J xx3 • ≤B2	006410
GR10q	1x28 W	FSS	RB1	I	64	• •	2700				IK05 0,70J xx3 • ≤B2	006411


QUATRIX A EM/3P

Emergency - electronic ballast





GR10q	1x16 W	FSS	GR3	I	64	•	2700				IK05 0,70J xx3	A2÷A3 3007615 
GR10q	1x16 W	FSS	AN3	I	64	•	2700				IK05 0,70J xx3	A2÷A3 3007625 
GR10q	1x16 W	FSS	RB1	I	64	•	2700				IK05 0,70J xx3	A2÷A3 3007945 

If information about Kelvin degrees is provided, this means that the lamp is included.

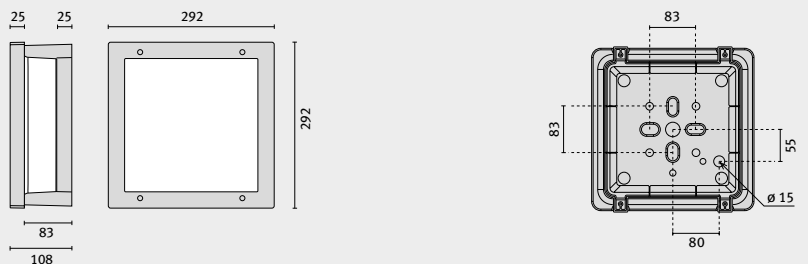GR3 AN3 RB1



QUATRIX G

	E27	max 1x100 W IAA
	E27	max 1x21 Dulux EL Longlife max 1x23 PHILIPS PL-E
	G24q-2	2x18 W FSQ
	GR10q	1x28 W FSS




lampholder	W	ILCOS	colour	class	IP		Kelvin		Cos φ ≥ 0,9	EEL	code	notes
------------	---	-------	--------	-------	----	---	--------	---	----------------	-----	------	-------

QUATRIX G

E27	max 1x100 W IAA	AN3		I	64	• •					IK05 0,70J xx3	006424
E27	max 1x100 W IAA	RB1		I	64	• •					IK05 0,70J xx3	006425
Fluorescent - electronic ballast 220/240 V 50/60 Hz												
G24q-2	2x18 W	FSQ	AN3	I	64	• •	2700				IK05 0,70J xx3 • A2	056428
G24q-2	2x18 W	FSQ	RB1	I	64	• •	2700				IK05 0,70J xx3 • A2	056429
Fluorescent - magnetic ballast 230 V 50 Hz												
GR10q	1x28 W	FSS	RB1	I	64	• •	2700				IK05 0,70J xx3 • ≤B2	006431

If information about Kelvin degrees is provided, this means that the lamp is included.







1 emergency - 1 hour
2 emergency - 2 hours
3 emergency - 3 hours



With the QUATRIX K fixtures, Danilo Premoli created a particular alphabet of light, used for the permanent installation entitled "Tutto non è tutto" ("Everything is not all"), set up outside the Italian Atelier showroom in Ripa di Porta Ticinese 73 in Milan.

QUATRIX K

	E27	max 1x100 W IAA
	E27	max 1x21 Dulux EL Longlife max 1x23 PHILIPS PL-E
	G24q-2	2x18 W FSQ
	GR10q	1x28 W FSS



lampholder	W	ILCOS	colour	class	IP		Kelvin		Cos φ ≥ 0,9	EEL	code	notes
------------	---	-------	--------	-------	----	---	--------	---	----------------	-----	------	-------

QUATRIX K

E27	max 1x100 W IAA	GR3	I	64	• •						IK05 0,70J xx3	006412
E27	max 1x100 W IAA	AN3	I	64	• •						IK05 0,70J xx3	006413
E27	max 1x100 W IAA	RB1	I	64	• •						IK05 0,70J xx3	006414

Fluorescent - electronic ballast 220/240 V 50/60 Hz

G24q-2	2x18 W	FSQ	GR3	I	64	• •	2700				IK05 0,70J xx3 • A2	056418
G24q-2	2x18 W	FSQ	AN3	I	64	• •	2700				IK05 0,70J xx3 • A2	056419
G24q-2	2x18 W	FSQ	RB1	I	64	• •	2700				IK05 0,70J xx3 • A2	056420

Fluorescent - magnetic ballast 230 V 50 Hz

GR10q	1x28 W	FSS	RB1	I	64	• •	2700				IK05 0,70J xx3 • ≤B2	006423
-------	--------	-----	-----	---	----	-----	------	--	--	--	-----------------------------	---------------

If information about Kelvin degrees is provided, this means that the lamp is included.



→ K screen can be customised with signs or logos upon request

GR3 AN3 RB1

