

Rocket



Related products:



ROCKET
Wall
P.408-411



Art. 3018




Art. 3011,
3020

Features IP65


- Ceiling Surface mounted luminaire.
- Body, frame and ring are made of die cast aluminium.
- Central housing is made of aluminium extrusion, with toughened safety glass, weatherproof durable silicone gasket and external screws made of stainless steel.
- Superior polyester powder paint is resistant to outdoor atmospheric conditions.
- Fixture is available in 3 sizes.
- Electrical installation includes double cable entry.
- Light heads on some models are adjustable with a 0° up to 20° or 25° tilting angle on each vertical side.
- Light sources include Halogen, Compact Fluor., Metal Halide and LED.
- Long life LED light source provide IR and UV free emission.
- Superpure aluminium reflector with different beam optics options.
- Colour effects can be created upon request by using colour filters or LEDs.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- Rocket ceiling mounted luminaire has a simple modernistic appearance making it ideal for today's architectural developments. Provides a personalized application or with adjustable light head tilting floodlight provides a high level of illuminance on the illuminated surface. It is also able to use energy saving light sources including LED.
- Application areas: safety and security task lighting solutions, facades, entrances, walkways, corridors balconies. For both outdoor or indoor use.

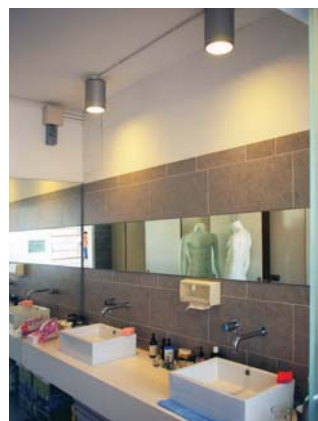

Colour 10 29



Rocket Ceiling Adjustable

3011	35W G8.5 CDM-TC		15°
3020	35W G8.5 CDM-TC		55°

With integral conventional control gear 230V 50Hz.
Adjustable angle 25°.

Rocket Ceiling

3021	26W GX24q-3 TC-TE		15°
3505-K30D15	With 25W LED 3000K 1500lm		15°
3505-K40D15	With 25W LED 4000K 1800lm		15°
3505-K30D30	With 25W LED 3000K 1500lm		30°
3505-K40D30	With 25W LED 4000K 1800lm		30°
3505-K30D45	With 25W LED 3000K 1500lm		45°
3505-K40D45	With 25W LED 4000K 1800lm		45°

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.
CRI>80.
Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.
Other colour temperatures K or CRI are available upon request.



Rocket Ceiling

3063	12W E27 PAR30 LED		
-------------	-------------------	--	--



Mini Rocket Ceiling Adjustable

3018	35W GU5.3 MR16 Hal.		
-------------	---------------------	--	--

With integral electronic transformer 220-240/12V 50/60Hz.
Adjustable angle 20°.

Mini Rocket Ceiling

3061	7W E27 PAR20 LED		
3506-K30D25	With 18W LED 3000K 1200lm		25°
3506-K40D25	With 18W LED 4000K 1300lm		25°
3506-K30D45	With 18W LED 3000K 1200lm		45°
3506-K40D45	With 18W LED 4000K 1300lm		45°
3506-K30D55	With 18W LED 3000K 1200lm		55°
3506-K40D55	With 18W LED 4000K 1300lm		55°

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.
CRI>80.
Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.
Other colour temperatures K or CRI are available upon request.