


SKYGUARD

Prisma design



h max 2,5 m
h min 0,92 m

SKYGUARD is a range of wall, pole mounted and bollard fittings with a full cut-off optic, compliant with the standards UNI 10819 and the regional laws concerning light pollution.

SKYGUARD WALL, which can be mounted on a wall or a triangular post, is also available in the asymmetrical version, with extremely high performance.

SKYGUARD GARDEN has a post, divided into two sectors, that allow a Plexiglas panel to be inserted.



The panel can be customised with logos or other indications.

The SKYGUARD series uses fluorescent and metal halide light sources.

The series can be used in residential areas, offices, shopping centres, showrooms, large rooms, and also for access paths where there is also a need for adequate signage.





SKYGUARD WALL is also available in an emergency model (SKYGUARD WALL EM/3P).




SKYGUARD WALL


SKYGUARD WALL

	E27	max 1x75 W IAA
	GX24d-3	1x26 W FSM

SKYGUARD WALL/A

	G12	1x70 W MT
---	-----	-----------

SKYGUARD WALL EM/3P

	GX24q-2	1x18 W FSM
---	---------	------------



Outdoor luminaire, post and wall mounting, comprising:

- Painted die-cast aluminium housing and trim
- Clear glass cover
- Polymer gasket
- Anodised aluminium reflector
- Painted extruded aluminium bracket
- Models are available with asymmetric distribution (A) in anodized aluminium for metal halide lamps

lampholder	W	ILCOS	colour	class	IP		Kelvin		Cos φ	EEL	code	notes
------------	---	-------	--------	-------	----	---	--------	---	-------	-----	------	-------




SKYGUARD WALL

E27	max 1x75 W	IAA	GR3	I	65	• •					IK07 2J xx5	006632
E27	max 1x75 W	IAA	AN3	I	65	• •					IK07 2J xx5	006633

Fluorescent - magnetic ballast 230 V 50 Hz

GX24d-3	1x26 W	FSM	GR3	I	65	• •	2700				IK07 2J xx5	• ≤B2	006636
GX24d-3	1x26 W	FSM	AN3	I	65	• •	2700				IK07 2J xx5	• ≤B2	006637



SKYGUARD WALL/A



Discharge - magnetic ballast

G12	1x70 W	MT	GR3	I	65	•					IK07 2J xx5	•	006666
G12	1x70 W	MT	AN3	I	65	•					IK07 2J xx5	•	006667



SKYGUARD WALL EM/3P


Emergency - electronic ballast

GX24q-2	1x18 W	FSM	GR3	I	65	•					IK07 2J xx5	A2÷A3	3007635 
GX24q-2	1x18 W	FSM	AN3	I	65	•					IK07 2J xx5	A2÷A3	3007645 


If information about Kelvin degrees is provided, this means that the lamp is included.

GR3


AN3





SKYGUARD WALL
1x75 W IAA



SKYGUARD WALL
1x26 W/T FSM




SKYGUARD WALL/A
1x70 W MT

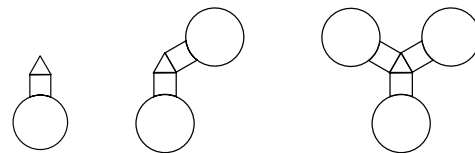

POST FOR SKYGUARD LUMINAIRE

Painted extruded aluminium pole, triangular section, 2500 mm height, complete with flange for connection to a ground support, it can house either one, two or three luminaires

description	colour	code
Triangular post 2500 c/w fl ange	AN3	000506
Triangular post 2500 c/w fl ange	GR3	000505
Fixing rod Ø 18 x 400		000768

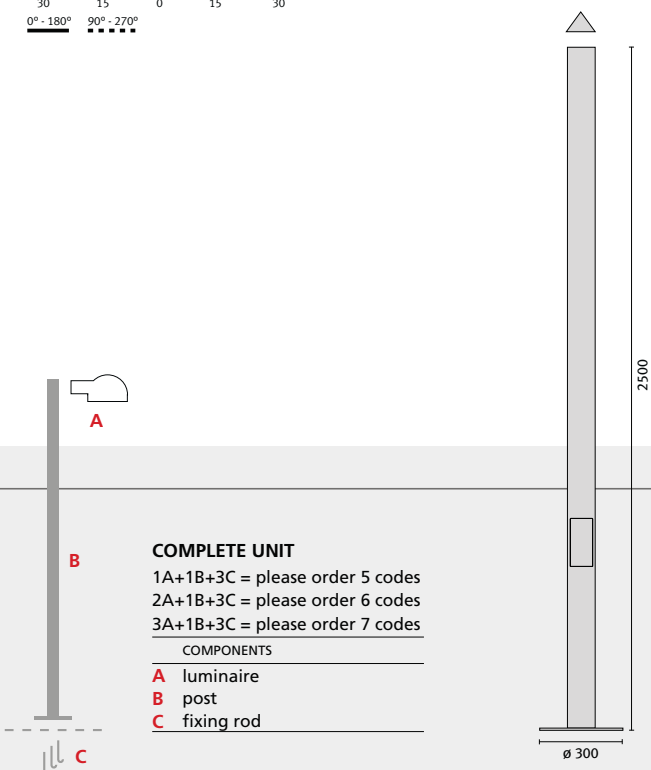

COMPLETE UNIT
1A+1B+3C = please order 5 codes
2A+1B+3C = please order 6 codes
3A+1B+3C = please order 7 codes

COMPONENTS

A luminaire
B post
C fixing rod

1 emergency - 1 hour
2 emergency - 2 hours
3 emergency - 3 hours

000768