

# SYNCRO

design Roberto Fiorato

Recessed, semi-recessed, surface and post mounted luminaire for indoor and outdoor lighting, comprising:

- Die-cast painted aluminium body, trims, and shades
- Pressed glass diffuser with internal pattern for Syncro P and PG, conical for Syncro, Syncro Visa, Syncro Grill. Internally matt
- EPDM gasket
- Stainless steel locking screws
- Safe and Visa Safe version with polycarbonate diffuser
- A recessed fixing kit is available for recessed installation. Order separately

Leuchten für Einbau und Halbeinbau, Aufbau- und Pollermontage für Innen- und Außenbereiche, bestehend aus:

- Gehäuse, Ring, und Blenden aus Aluminiumdruckguss
- Diffusor aus Flachglas (Syncro P) oder konischem Glas (Syncro Visa und Syncro Grill), innen mattiert
- EPDM-Dichtung
- Äußere Schrauben aus Edelstahl
- Syncro Visa Safe Ausführung mit Polycarbonat-Diffusor
- Der Einbautopf für den Wandeinbau kann als Zubehör bestellt werden



IP 54

class I

IK06 1J xx3  
IK10 20J xx9



**WH1**  
WHITE  
WEISS



**BK1**  
BLACK  
SCHWARZ




**GR2**  
GLOSS METALLIC GREY  
GRAU METALLIC, POLIERT

IP 54

class I

IK06 1J xx3  
IK10 20J xx9



**SYNCRO P**

E27	max 1x60w	IAA	BK1	I	•		<b>007181</b>
E27	max 1x60w	IAA	GR2	I	•		<b>006600</b>





**Fluorescent - electronic ballast 220/240V 50/60Hz/Leuchtstofflampen - EVG 220/240V 50/60Hz**

2G7	1x9w	FSD	BK1	I	2700	A2÷A3	<b>057184</b>
2G7	1x9w	FSD	GR2	I	2700	A2÷A3	<b>056601</b>

**Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz**

G23	2x9w	FSD	BK1	I	•	$\leq B2$	<b>007187</b>
G23	2x9w	FSD	GR2	I	•	$\leq B2$	<b>006602</b>

IK06 1J xx3



**SYNCRO VISA**

E27	max 1x75w	IAA	BK1	I	•		<b>007217</b>
E27	max 1x75w	IAA	GR2	I	•		<b>006612</b>




**Fluorescent - electronic ballast 220/240V 50/60Hz/Leuchtstofflampen - EVG 220/240V 50/60Hz**

2G7	1x9w	FSD	BK1	I	2700	A2÷A3	<b>057220</b>
2G7	1x9w	FSD	GR2	I	2700	A2÷A3	<b>056614</b>

**Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz**

G23	2x9w	FSD	BK1	I	•	$\leq B2$	<b>007223</b>
G23	2x9w	FSD	GR2	I	•	$\leq B2$	<b>006614</b>

IK06 1J xx3



**SYNCRO VISA SAFE**

E27	max 1x75w	IAA	BK1	I	•		<b>006649</b>
E27	max 1x75w	IAA	GR2	I	•		<b>006659</b>

**Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz**

G23	2x9w	FSD	BK1	I	•	$\leq B2$	<b>006653</b>
G23	2x9w	FSD	GR2	I	•	$\leq B2$	<b>006661</b>


IK10 20J xx9



PACKAGE SIZE / VERPACKUNGSMABE

32 x 29,5 x 35 cm  
(master x 3)

DISTANCE BETWEEN FIXING HOLES / BOHRLOCHABSTAND



If information about Kelvin degrees is provided, this means that the lamp is included.  
Bei Angabe der Grad in Kelvin ist die Lampe eingeschlossen.

LAMPHOLDER	COLOUR CLASS	COS φ		CODE	NOTES
FASSUNG W	ILCOS FARBE KLASSE	KELVIN	≥ 0,9	EEL	BESTELLN.R. BEMERKNG. EURO



**SYNCO GRILL**

E27	max 1x75w	IAA	WH1	I	•		<b>007228</b>
E27	max 1x75w	IAA	BK1	I	•		<b>007229</b>
E27	max 1x75w	IAA	GR2	I	•		<b>006616</b>

**Fluorescent - electronic ballast 220/240V 50/60Hz/Leuchtstofflampen - EVG 220/240V 50/60Hz**





2G7	1x9w	FSD	WH1	I	2700	A2÷A3	<b>057231</b>
2G7	1x9w	FSD	BK1	I	2700	A2÷A3	<b>057232</b>
2G7	1x9w	FSD	GR2	I	2700	A2÷A3	<b>056617</b>

**Fluorescent - magnetic ballast 230V 50Hz/Leuchtstofflampen - VVG 230V 50Hz**

G23	2x9w	FSD	WH1	I	•	≤B2	<b>007234</b>
G23	2x9w	FSD	BK1	I	•	≤B2	<b>007235</b>
G23	2x9w	FSD	GR2	I	•	≤B2	<b>006618</b>


IK06 1J xx3



PACKAGE SIZE / VERPACKUNGSMASSE

31 x 29,5 x 53,5 cm  
(master x 3)

DISTANCE BETWEEN FIXING HOLES / BOHRLOCHABSTAND



WH1  
WHITE  
WEISS

BK1  
BLACK  
SCHWARZ

GR2  
GLOSS METALLIC GREY  
GRAU METALLIC, POLIERT



WH1  
WHITE  
WEISS



BK1  
BLACK  
SCHWARZ



GR2  
GLOSS METALLIC GREY  
GRAU METALLIC, POLIERT

# SYNCRO

## ACCESSORIES

Aluminium post for single or twin (back to back) luminaire mounting, comprising:

- Painted extruded aluminium post
- Painted aluminium flange for anchoring to the ground

### Recessed fixing kit

- Recessed fixing kit made of technopolymer to be cemented into wall prior to installation of the luminaire

## ZUBEHÖR

Mast aus Aluminium für eine Leuchte oder zwei Leuchten, bestehend aus:

- Mast aus lackiertem, eloxiertem Aluminium
- Flansch für die Bodenbefestigung aus lackiertem Aluminium

### Einbautopf

- Einbautopf aus selbstverlöschendem Technopolymer für den Wandeinbau vor der Installation der Leuchte



DESCRIPTION / BESCHREIBUNG

COLOUR  
FARBE

CODE  
BESTELLNR.

EURO

Recessed fixing kit L420/Einbautopf L420		<b>002482</b>	
Post/Mast	WH1	<b>008613</b>	
Post/Mast	BK1	<b>008614</b>	
Post/Mast	GR2	<b>008622</b>	
Fixing rod/Einbetonierschraube		<b>008981</b>	

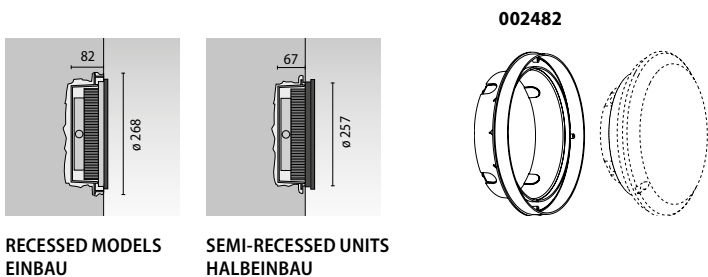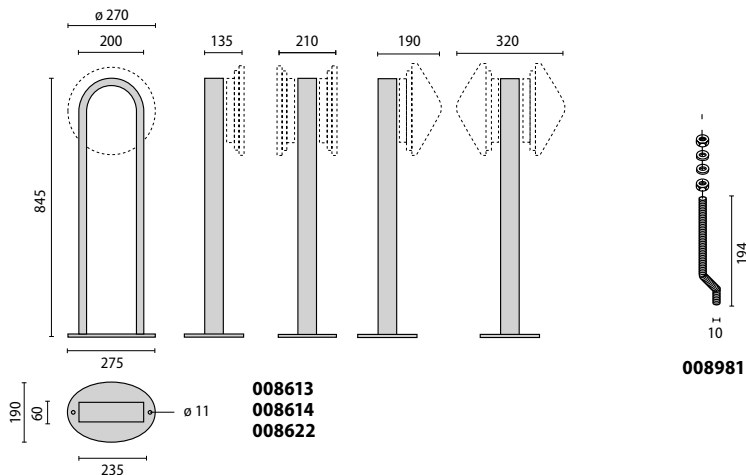

RECESSED MODELS  
EINBAU

SEMI-RECESSED UNITS  
HALBEINBAU