



TARGET

design R. Fiorato, F. Pagliarini



The fitting's body can be adjusted to the desired position.

LED models (both 3200° K and 6500° K) with lenses that create different beam widths are available.




TARGET



TARGET MAXI



TARGET MAXI PLUS



If mounted with the optical axis perpendicular to the ground, there is no upward dispersion of light.



Target Detek comes with an integrated movement sensor.




Range of indoor/outdoor wall mounted adjustable floodlights with clear toughened glass and die-cast aluminium housing. The Target is designed for use with LED, fluorescent and HID metal halide lamps. It is also available with a motion detector (Target Detek).

Target Maxi and Target Maxi Plus can also accommodate LED, fluorescent or metal halide light sources. Target Maxi Plus has a long double-jointed arm that makes it suitable for lighting in shop windows and signs.


Target Maxi and Target are suitable for directional lighting in showrooms, exhibition centres and homes – where the fitting can be adjusted and used as an uplighter for indirect lighting.

TARGET MAXI TARGET MAXI PLUS

TARGET MAXI
TARGET MAXI PLUS

	G5	1x24w FDH
	G5	2x24w FDH
	G12	2x35w MT

- Range of wall mounted floodlights, comprising:
- cable compartment in painted, die-cast aluminium;
 - optical compartment in painted, die-cast aluminium;
 - reflector in anodised aluminium for the discharging model;
 - polished optics to direct the light beam for fluorescent models;
 - diffuser in clear tempered glass;
 - silicone gasket.
 - JM and fluorescent models have an electronic power supply unit.
 - 3200K and 6500K white LED models are available with lenses to direct the light beam by 12°, 25°, 45° and for elliptical directioning 15°/45°.
 - Target Maxi Plus models are fitted with a painted die-cast aluminium arm.

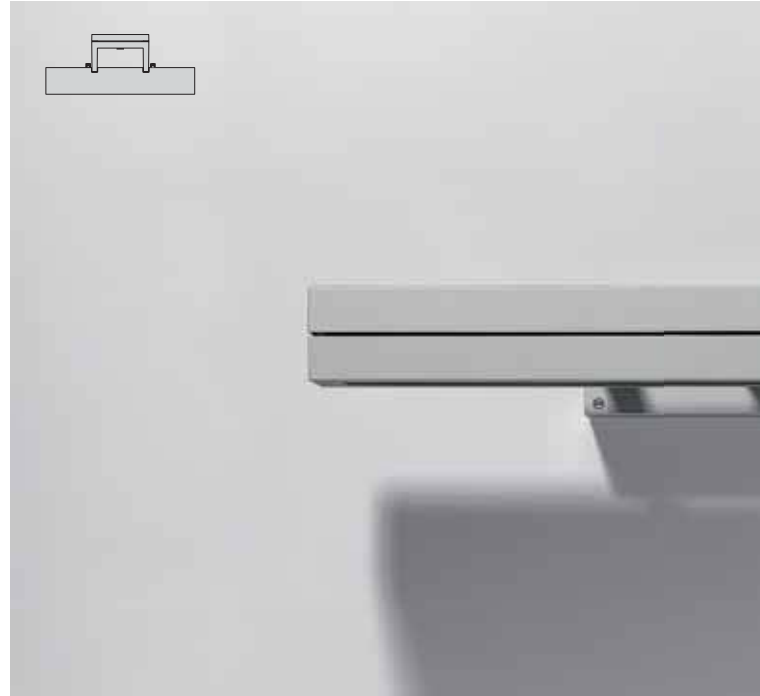

lampholder	w	ILCOS	colour	class	IP			Kelvin		Cos φ ≥ 0,9	EEL	code	notes
------------	---	-------	--------	-------	----	---	---	--------	---	----------------	-----	------	-------

TARGET MAXI


Fluorescent - electronic ballast 220/240V 50/60Hz



G5	1x24w	FDH	WH1	I	65	•		IK09 10J xx7		A2÷A3		7004805	
G5	1x24w	FDH	AN2	I	65	•		IK09 10J xx7		A2÷A3		7004825	
G5	1x24w	FDH	GR2	I	65	•		IK09 10J xx7		A2÷A3		7004815	
G5	2x24w	FDH	WH1	I	65	•		IK09 10J xx7	•	A2		7004835	
G5	2x24w	FDH	AN2	I	65	•		IK09 10J xx7	•	A2		7004855	
G5	2x24w	FDH	GR2	I	65	•		IK09 10J xx7	•	A2		7004845	

Discharge - electronic ballast

G12	2x35w	MT	WH1	I	65	•		IK09 10J xx7	•			7004775	
G12	2x35w	MT	AN2	I	65	•		IK09 10J xx7	•			7004795	
G12	2x35w	MT	GR2	I	65	•		IK09 10J xx7	•			7004785	

WH1 GR2 AN2



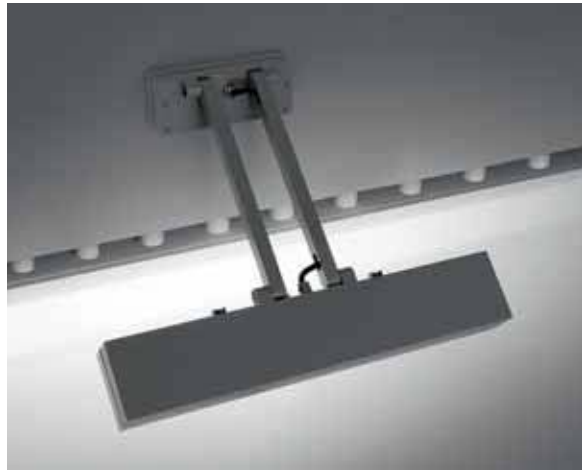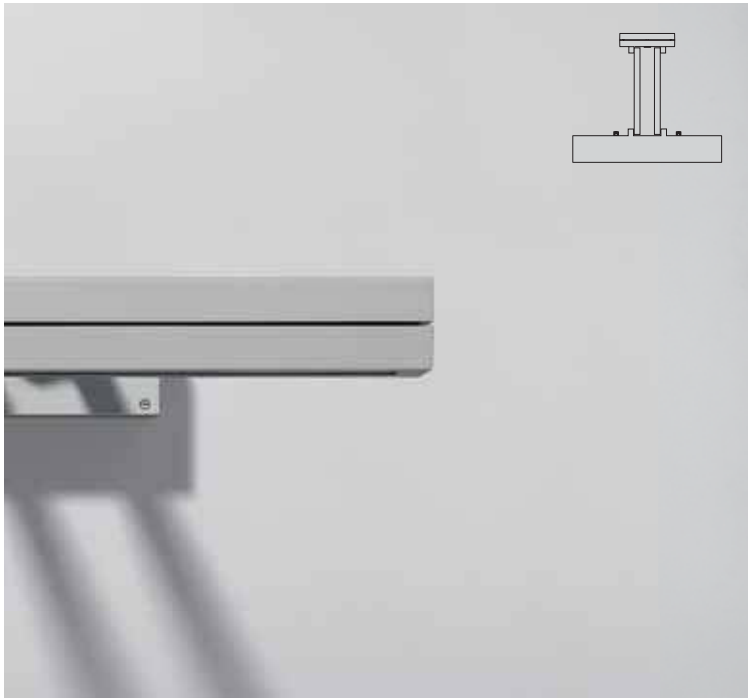

The double-jointed arm of the Maxi Plus model allow the user to adjust the position of the floodlight for lighting signs, panels and shop windows.

lampholder w ILCOS colour class IP Kelvin \uparrow \downarrow $\text{Cos } \varphi \geq 0,9$ EEl code notes


TARGET MAXI PLUS

Fluorescent - electronic ballast 220/240V 50/60Hz

G5	1x24w	FDH	WH1	I	65	•	IK09 10J xx7	A2÷A3	7004925
G5	1x24w	FDH	AN2	I	65	•	IK09 10J xx7	A2÷A3	7004945
G5	1x24w	FDH	GR2	I	65	•	IK09 10J xx7	A2÷A3	7004935
G5	2x24w	FDH	WH1	I	65	•	IK09 10J xx7	• A2	7004955
G5	2x24w	FDH	AN2	I	65	•	IK09 10J xx7	• A2	7004975
G5	2x24w	FDH	GR2	I	65	•	IK09 10J xx7	• A2	7004965

Discharge - electronic ballast

G12	2x35w	MT	WH1	I	65	•	IK09 10J xx7	• A2	7004895
G12	2x35w	MT	AN2	I	65	•	IK09 10J xx7	• A2	7004915
G12	2x35w	MT	GR2	I	65	•	IK09 10J xx7	• A2	7004905

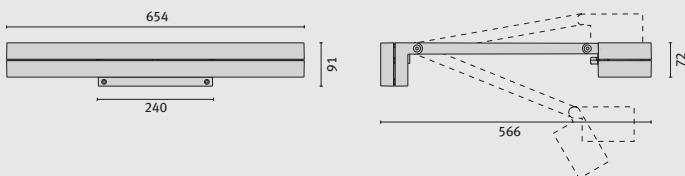



TARGET MAXI LED TARGET MAXI PLUS LED

TARGET MAXI LED 12°
TARGET MAXI PLUS LED 12°

n. 24 led 12°x1,2w

TARGET MAXI LED 25°
TARGET MAXI PLUS LED 25°

n. 24 led 25°x1,2w

TARGET MAXI LED 45°
TARGET MAXI PLUS LED 45°

n. 24 led 45°x1,2w

TARGET MAXI LED 15/45°
TARGET MAXI PLUS LED 15/45°


n. 24 led 15/45°x1,2w



lampholder w ILCOS colour class IP Kelvin $\cos \phi$ $\geq 0,9$ EEI code notes

TARGET MAXI LED 12°


Power LED 220/240V 50/60Hz



n. 24 led 12°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	•	302337
n. 24 led 12°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	•	302338
n. 24 led 12°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	•	302339
n. 24 led 12°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	•	302334
n. 24 led 12°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	•	302335
n. 24 led 12°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	•	302336

TARGET MAXI LED 25°


Power LED 220/240V 50/60Hz



n. 24 led 25°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	•	302343
n. 24 led 25°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	•	302344
n. 24 led 25°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	•	302345
n. 24 led 25°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	•	302340
n. 24 led 25°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	•	302341
n. 24 led 25°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	•	302342

TARGET MAXI LED 45°


Power LED 220/240V 50/60Hz



n. 24 led 45°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	•	302349
n. 24 led 45°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	•	302350
n. 24 led 45°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	•	302351
n. 24 led 45°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	•	302346
n. 24 led 45°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	•	302347
n. 24 led 45°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	•	302348

TARGET MAXI LED 15/45°


Power LED 220/240V 50/60Hz




n. 24 led 15/45°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	•	302355
n. 24 led 15/45°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	•	302356
n. 24 led 15/45°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	•	302357
n. 24 led 15/45°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	•	302352
n. 24 led 15/45°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	•	302353
n. 24 led 15/45°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	•	302354


If information about Kelvin degrees is provided, this means that the light bulb is included.

elliptical
beam for
wall washer
applications



○○○ WH1+WHL ○○○ GR2+WHL ●●● AN2+WHL



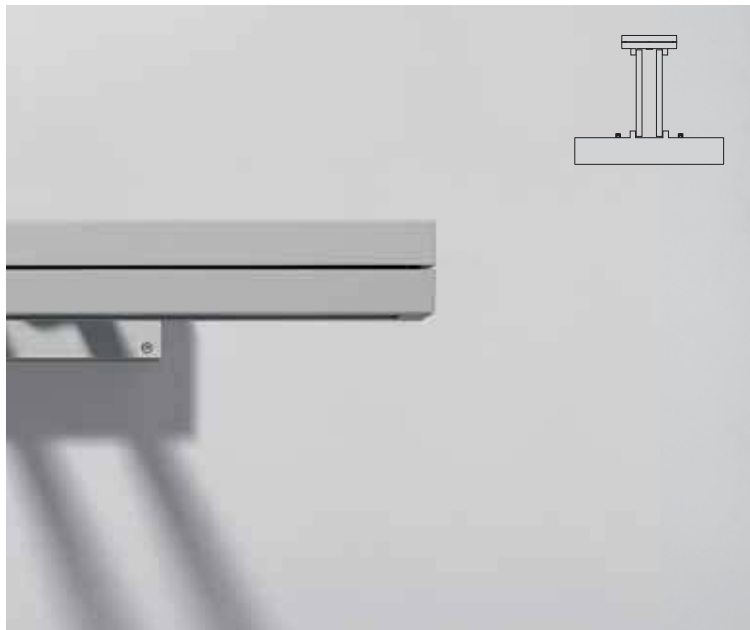


The LED models come with four different beam widths.

lampholder w ILCOS colour class IP Kelvin $\cos \theta \geq 0,9$ EEI code notes

TARGET MAXI PLUS LED 12°

Power LED 220/240V 50/60Hz


n. 24 led 12°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	302361
n. 24 led 12°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	302362
n. 24 led 12°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	302363
n. 24 led 12°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	302358
n. 24 led 12°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	302359
n. 24 led 12°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	302360



TARGET MAXI PLUS LED 25°

Power LED 220/240V 50/60Hz


n. 24 led 25°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	302367
n. 24 led 25°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	302368
n. 24 led 25°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	302369
n. 24 led 25°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	302364
n. 24 led 25°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	302365
n. 24 led 25°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	302366



TARGET MAXI PLUS LED 45°

Power LED 220/240V 50/60Hz



n. 24 led 45°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	302373
n. 24 led 45°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	302374
n. 24 led 45°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	302375
n. 24 led 45°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	302370
n. 24 led 45°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	302371
n. 24 led 45°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	302372



TARGET MAXI PLUS LED 15/45°

Power LED 220/240V 50/60Hz

n. 24 led 15/45°x1,2w	WH1+WHL	I	65	• 6500	IK09 10J xx7	302379
n. 24 led 15/45°x1,2w	GR2+WHL	I	65	• 6500	IK09 10J xx7	302380
n. 24 led 15/45°x1,2w	AN2+WHL	I	65	• 6500	IK09 10J xx7	302381
n. 24 led 15/45°x1,2w	WH1+WHL	I	65	• 3200	IK09 10J xx7	302376
n. 24 led 15/45°x1,2w	GR2+WHL	I	65	• 3200	IK09 10J xx7	302377
n. 24 led 15/45°x1,2w	AN2+WHL	I	65	• 3200	IK09 10J xx7	302378



elliptical beam for wall washer applications

If information about Kelvin degrees is provided, this means that the light bulb is included.

