



WIN are a range of compact floodlights with a distinctive clean linear design suitable for indoor and outdoor use. With their compact and shallow design the fittings are ideal for positioning in discreet locations such as lofts, eaves and terraces etc. A wide range of reflector options, light sources and accessories makes WIN a flexible luminaire suitable for general area floodlighting to architectural facades and feature lighting.


WIN is available in two sizes:
WIN 01 (max 150W) and WIN 02 (max 400W).

- Die cast aluminium body painted aluminium grey.
- Symmetrical, asymmetrical or circular reflectors in high purity aluminium anodised and polished.
- Toughened "safety" glass cover mounted in a technopolymer frame which hinges down for maintenance.
- Silicone rubber anti-ageing gasket.
- Mounting bracket in steel finished polyester painted aluminium.
- PG11 anti-tearing cable gland for H05RN-F 3G1 Ø5-10mm cables.
- Stainless steel external screws.



WIN 01/S Symmetrical reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes
RX7s	70W	SD-MD		S	94	I	CR			• 05144894	
RX7s	150W	SD-MD		S	94	I	CR			• 05144994	
RX7s	70W	MD			94	I	CRL			• 07017294	⚡
RX7s	150W	MD			94	I	CRL			• 07017394	⚡




⚡ Fittings supplied complete with lamp.



WIN 01/A Asymmetrical reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes
RX7s	70W	SD-MD		A	94	I	CR			• 05126394	
RX7s	150W	SD-MD		A	94	I	CR			• 05126494	
RX7s	70W	SD-MD		A45°	94	I	CR			• 05226094	
RX7s	150W	SD-MD		A45°	94	I	CR			• 05226194	
RX7s	70W	MD		A	94	I	CRL			• 07014594	⚡
RX7s	150W	MD		A	94	I	CRL			• 07014694	⚡




⚡ Fittings supplied complete with lamp.



WIN 01/C Circular reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes
RX7s	70W	SD-MD		C	94	I	CR			• 05126594	
RX7s	150W	SD-MD		C	94	I	CR			• 05126694	
RX7s	70W	MD		C	94	I	CRL			• 07014794	⚡
RX7s	150W	MD		C	94	I	CRL			• 07014894	⚡





⚡ Fittings supplied complete with lamp.




WIN 01/WR Roadway reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEl =	Cosp ≥ 0,9	Code	Notes
G12	70W	MT		WR	94	I	CR			• 05246794	
G12	150W	MT		WR	94	I	CR			• 05246894	






CLASS I		94	IP 66									MT 70-150W HCL-T HQL-T	MD 70-150W HQL-TS/MH-TD CDM-TD	SD 70-150W NAV-TS	Led Max 39,6W
---------	--	-----------	--------------	--	--	--	--	--	--	--	--	--	--	--------------------------------	-------------------------

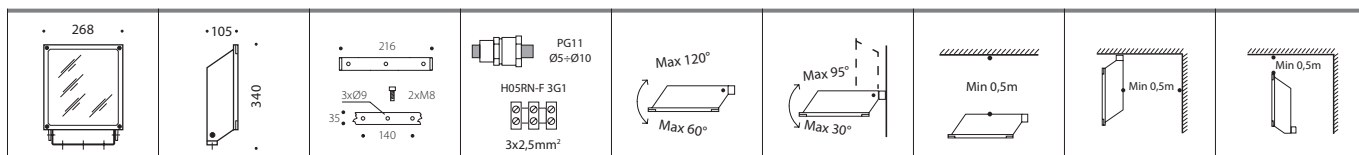


WIN 01/LED 7000° K


Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EELI =	Cosp ≥ 0,9	Code	Notes
n.36 led 350mA	39,6W		7000°	C 12°	94	I	ETRC			06018594	
n.36 led 350mA	39,6W		7000°	C 25°	94	I	ETRC			06018894	
n.36 led 350mA	39,6W		7000°	C 45°	94	I	ETRC			06019194	
n.36 led 350mA	39,6W		7000°	ELL 45°x15°	94	I	ETRC			06019494	
n.36 led 350mA	39,6W		7000°	ELL 15°x45°	94	I	ETRC			06022994	
n.36 led 350mA	39,6W		7000°	A 6°	94	I	ETRC			06019794	




Lens	C 12°	C 25°	C 45°
ØA	560	1120	2015
ØB	1120	2240	4030
ØC	1680	3660	6045
ØD	2240	4480	8100



Lens	A 6°
bxx/A	2420 x 700
bxx/B	4840 x 1400
bxx/C	7260 x 2100
bxx/D	9680 x 2800



Lens	ELL 45°x15°
bxx/A	1730 x 535
bxx/B	3460 x 1070
bxx/C	5190 x 1605
bxx/D	6920 x 2140



Lens	ELL 15°x45°
bxx/A	535 x 1730
bxx/B	3460 x 1070
bxx/C	1605 x 5190
bxx/D	2140 x 6920


WIN 01/LED 3000° K

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EELI =	Cosp ≥ 0,9	Code	Notes
n.36 led 350mA	39,6W		3000°	C 12°	94	I	ETRC			06018694	
n.36 led 350mA	39,6W		3000°	C 25°	94	I	ETRC			06018994	
n.36 led 350mA	39,6W		3000°	C 45°	94	I	ETRC			06019294	
n.36 led 350mA	39,6W		3000°	ELL 45°x15°	94	I	ETRC			06019594	
n.36 led 350mA	39,6W		3000°	ELL 15°x45°	94	I	ETRC			06023094	
n.36 led 350mA	39,6W		3000°	A 6°	94	I	ETRC			06019894	

WIN 01/LED

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EELI =	Cosp ≥ 0,9	Code	Notes
n.36 led 350mA	39,6W		●	C 12°	94	I	ETRC			06018794	
n.36 led 350mA	39,6W		●	C 25°	94	I	ETRC			06019094	
n.36 led 350mA	39,6W		●	C 45°	94	I	ETRC			06019394	
n.36 led 350mA	39,6W		●	ELL 45°x15°	94	I	ETRC			06019694	
n.36 led 350mA	39,6W		●	ELL 15°x45°	94	I	ETRC			06023194	
n.36 led 350mA	39,6W		●	A 6°	94	I	ETRC			06019994	

ACCESSORIES

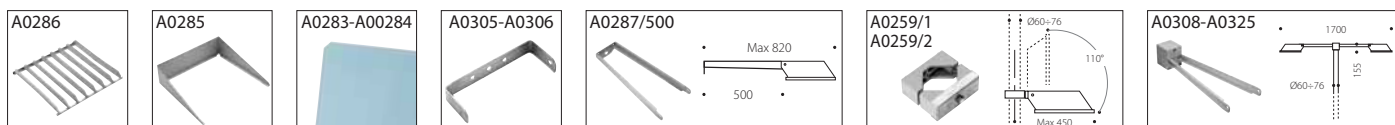

Code	Denomination	Colour	Description
14043294	A0286	94	External anti-glare louvre painted aluminium grey.
14043194	A0285	94	External steel cowl painted aluminium grey.
14042920	A0283		WIN 01 frosted glass optional replacement for standard clear glass.
14043020	A0284		WIN 01 frosted glass supplement to be ordered together with the fitting for factory fitted option.
14048104	A0305		WIN 01 mounting bracket in stainless steel.
14048204	A0306		WIN 01 supplement for stainless steel mounting bracket to be ordered together with the fitting.
14043394	A0287/500	94	500mm wall mounting extension arm in sheet steel painted aluminium grey.
14029094	A0259/1	94	Single WIN 01 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.
14047194	A0259/2	94	Twin WIN 01 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.
14048894	A0308/1	94	Single WIN 01 pole top fitting and outreach arm for 60-76mm poles. Aluminium pole top and steel outreach arm, painted aluminium grey.
14049094	A0308/2-90°	94	Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.
14048994	A0308/2-180°	94	Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 180°. Finished painted aluminium grey.
14049194	A0308/3-90°	94	Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.
14050294	A0325/3-120°	94	Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 120°. Finished painted aluminium grey.
14049294	A0308/4	94	Four WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.



WIN 02

design Silvia Paola Pennacchio



WIN are a range of compact floodlights with a distinctive clean linear design suitable for indoor and outdoor use. With their compact and shallow design the fittings are ideal for positioning in discreet locations such as lofts, eaves and terraces etc. A wide range of reflector options, light sources and accessories makes WIN a flexible luminaire suitable for general area floodlighting to architectural façades and feature lighting.


WIN is available in two sizes: WIN01 (max 150W) and WIN02 (max 400W).

- Die cast aluminium body painted aluminium grey.
- Symmetrical, asymmetrical or circular reflectors in high purity aluminium anodised and polished.
- Toughened "safety" glass cover mounted in a technopolymer frame which hinges down for maintenance.
- Silicone rubber anti-ageing gasket.
- Mounting bracket in steel finished polyester painted aluminium grey.
- M20x1.5 anti-tearing cable gland for H05RN-F 3G1.5 mm² Ø10-14mm cables.
- Stainless steel external screws.



WIN 02/S Symmetrical reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
E40	150W	ST-MT		S	94	I	CR			• 05143494	
E40	250W	ST-MT		S	94	I	CR			• 05143594	
E40	400W	ST-MT		S	94	I	CR			• 05143694	
E40	250W	MT*		S	94	I	CR			• 05143794	*for lampe HPI-T
E40	400W	MT*		S	94	I	CR			• 05143894	*for lampe HPI-T
E40	250W	ST		S	94	I	CRL			• 07017894	☼
E40	400W	ST		S	94	I	CRL			• 07017994	☼
E40	250W	MT*		S	94	I	CRL			• 07018094	☼ *for lampe HPI-T
E40	400W	MT*		S	94	I	CRL			• 07018194	☼ *for lampe HPI-T




☼ Fittings supplied complete with lamp.



WIN 02/A Asymmetrical reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
E40	150W	ST-MT		A	94	I	CR			• 05144094	
E40	250W	ST-MT		A	94	I	CR			• 05144194	
E40	400W	ST-MT		A	94	I	CR			• 05144294	
E40	250W	MT*		A	94	I	CR			• 05144394	*for lampe HPI-T
E40	400W	MT*		A	94	I	CR			• 05144494	*for lampe HPI-T
E40	250W	ST		A	94	I	CRL			• 07018294	☼
E40	400W	ST		A	94	I	CRL			• 07018394	☼
E40	250W	MT*		A	94	I	CRL			• 07018494	☼ *for lampe HPI-T
E40	400W	MT*		A	94	I	CRL			• 07018594	☼ *for lampe HPI-T



☼ Fittings supplied complete with lamp.




WIN 02/C Circular reflector

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
Fc2	250W	MD		C	94	I	CR			• 05144694	



				IK 08 5J	0,176m ²	0,062m ²		max 13,2kg				
CLASS I		94	IP 66						MT Max 400W HPI-T Plus	ST Max 400W NAV-T /SON-T	MT Max 400W CDO-TT HQL-T/D	MD Max 250W HQL-TS MH-TD

ACCESSORIES

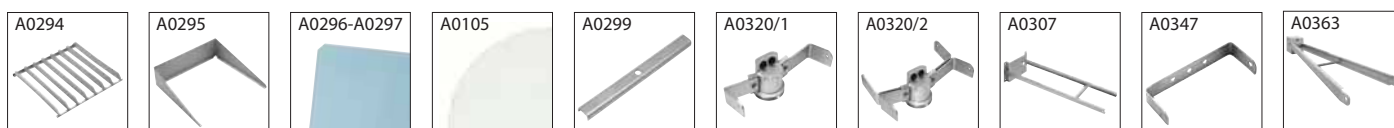

Code	Denomination	Colour	Description
14045694	A0294	94	External anti-glare louvre painted aluminium grey.
14045794	A0295	94	External steel cowl painted aluminium grey.
14045820	A0296		WIN 02 frosted glass optional replacement for standard clear glass.
14045920	A0297		WIN 02 frosted glass supplement to be ordered together with the fitting for factory fitted option.
14396993	A0105		WIN 02/C prismatic glass for use with WIN 02/C fittings only.
14046120	A0299		WIN 02 strengthening bracket. Suitable for one floodlight single point fixing M12 screw in centre of the bracket.
14051294	A0320/1	94	Single pole top mounting, for Ø60-76mm poles, painted aluminium grey
14051394	A0320/2	94	Double pole top mounting, Ø60-76mm poles, painted aluminium grey
14048694	A0307	94	1000mm extension arm in heavy gauge steel, painted aluminium grey.
14057394	A0347	94	Long bracket for ceiling mounting, painted aluminium grey.
14068694	A0363/1	94	Aluminium pole top and steel outreach arm. Painted aluminium grey.
14068794	A0363/2-90°	94	Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.
14068894	A0363/2-180°	94	Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 180°. Painted aluminium grey.
14068994	A0363/3-90°	94	Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.
14069094	A0363/3-120°	94	Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 120°. Painted aluminium grey.
14069194	A0363/4	94	Four WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles. Painted aluminium grey.

