

DEVON 2 | Design Stefano Anconetani

Lampada da incasso in vetro satinato, eseguita nei colori: azzurro, blu, bianco, rosa, verde, verde Nilo, cristallo trasparente e cromatizzato.

Semi-recessed glass fixture available in the following colors: light blue, white, cobalt blue, rose, jade green, aquamarine, crystal and mirrored chrome finishes.


Einbauleuchte aus satiniertem Glas in den Farben hellblau, blau, weiß, rosa, nilgrün und grün erhältlich. Neue Varianten: kristall klar und kristall verchromt.

Spot encastré en verre satiné disponible dans les couleurs: azur, bleu, blanc, rose, vert Nil ou vert. Nouvelle variantes en cristal transparent et effet chromatique.

Empotrable en vidrio satinado disponible en los colores: azul claro, azul oscuro, blanco, rosa, verde Nilo y verde. Nuevas variantes en vidrio transparente o efecto cromo.


Встроенный светильник из сатинированного стекла расцветок: Голубая, Синяя, Белая, Розовая, Зеленая, Зеленая Нил и прозрачный хрусталь и разноцветная.

DEVON 2



DIC max 1x50W-12V-GU5.3
DIC max 1x50W-250V-GU10

1,6 Kg - 4 lbs
foro 9,5 - Opening 3.3/4"



max 1x7W-LED-230V-GU10
max 1x11W-FLUORESCENT-230V-GU10
1x35W-MR-HQI-Brite Spot 230V-GX10

Quantitativo minimo
per le versioni colore
n. 20 pz. cad.

Minimum quantity
for colour finishes
nr. 20 pieces for each.



C: Cristallo
Crystal



B: Bianco
White



L: Verde Nilo
Acquamarine



U: Blue
Cobalt blue



SI: Cromatizzato
Chrome



H: Rosa
Rose




Q: Azzurro
Pale blue



V: Verde
Jade green

Dati tecnici pag. 374 > 379
Technical data available
on pages 374 > 379

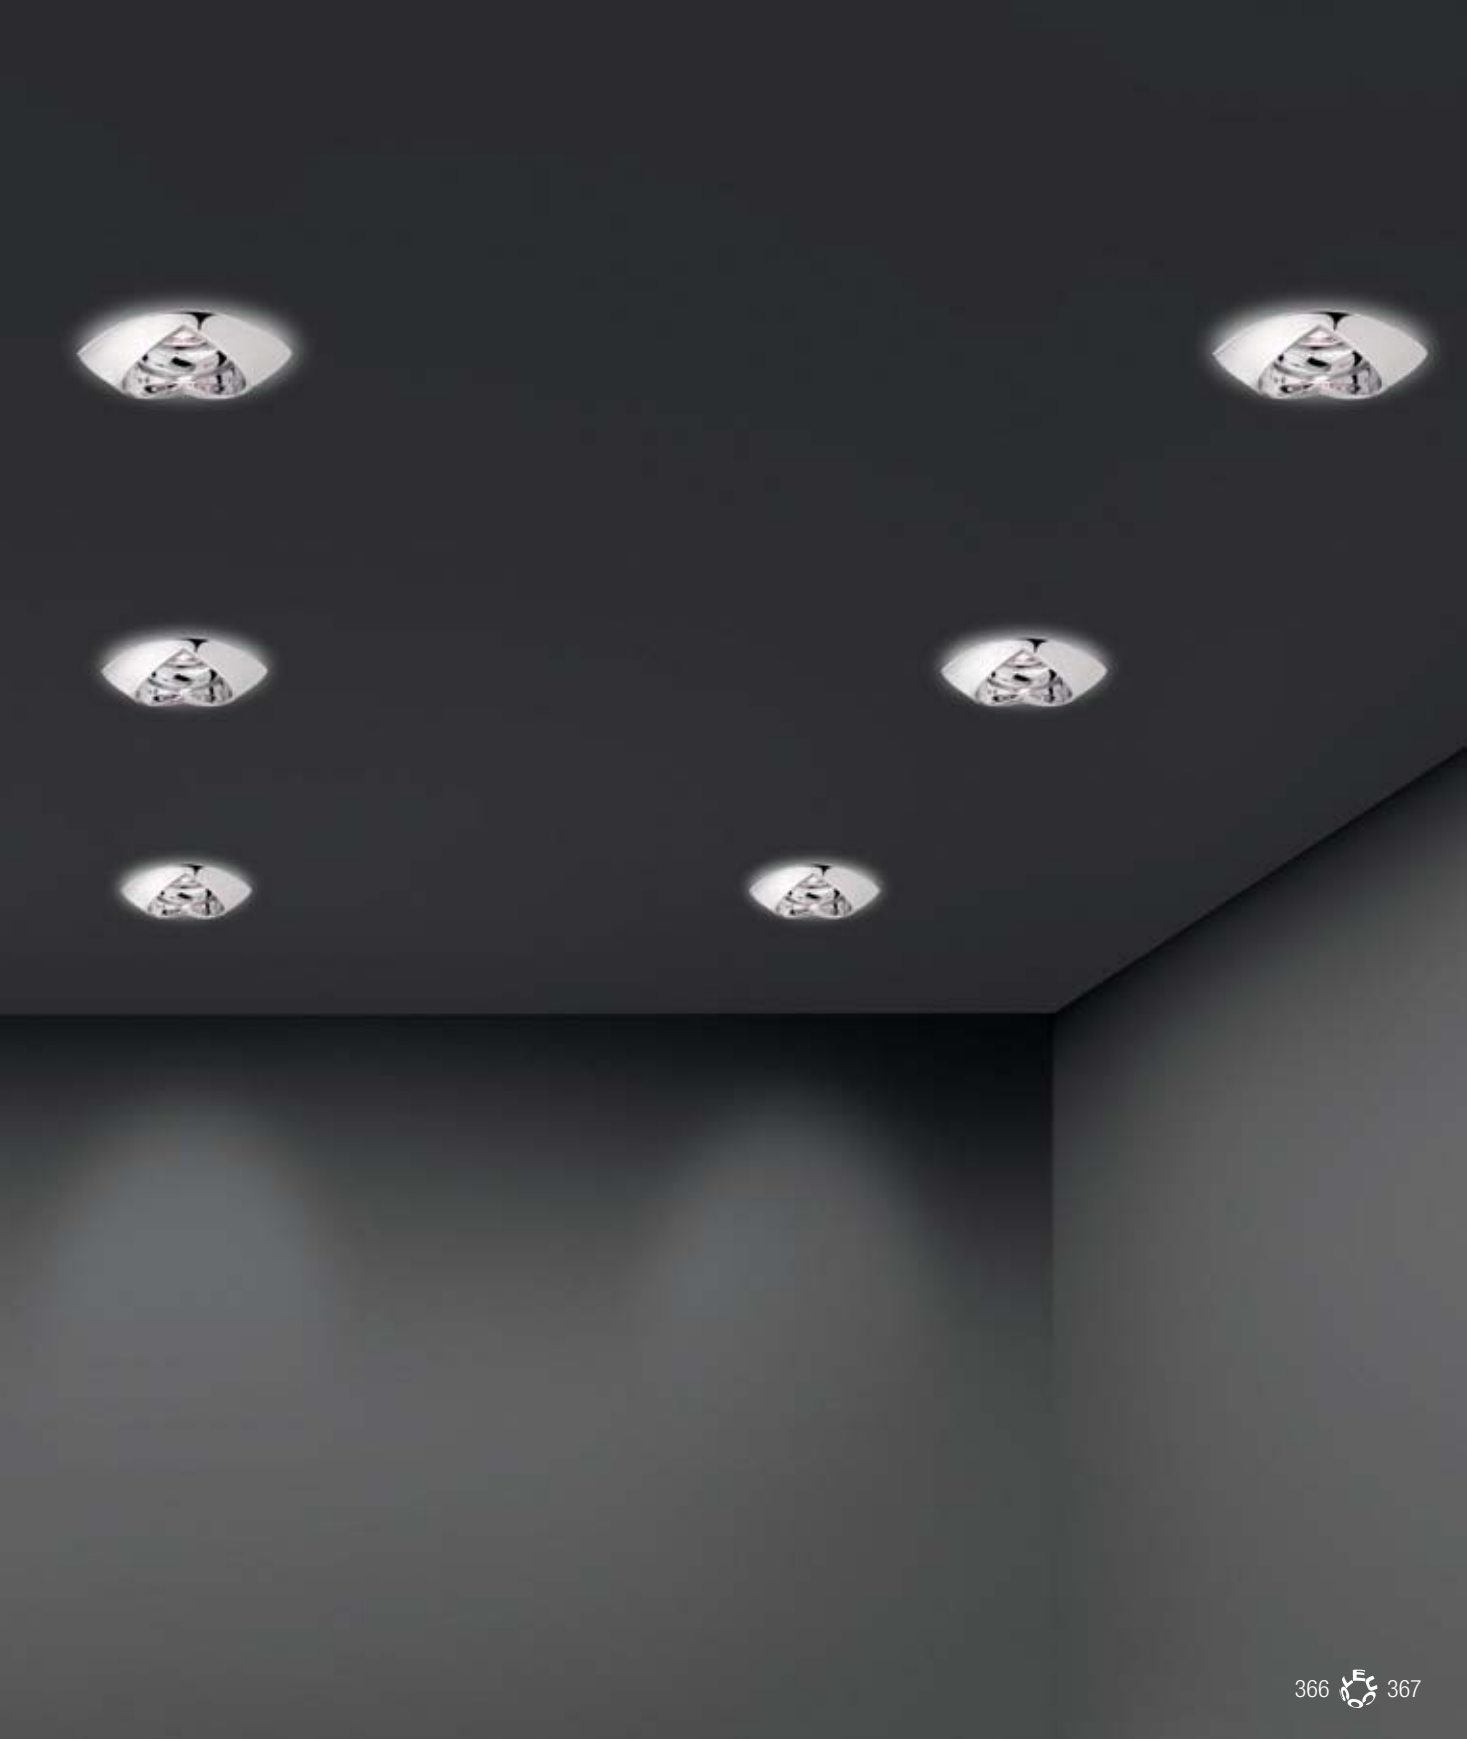

DAY



pag. 332 > 333


1,6 Kg - 4 lbs
foro 9,5 - Opening 3.3/4"




DAY - GU 5,3 - 50W 38°

Lux		
h	E max	E med
1.00	2028	1219
2.00	507	305
3.00	225	135
4.00	127	76
5.00	81	49


Gamma Angle



IP20 CE



IP43 CE cULus



max 1x7W-LED-230V-GU10
max 1x11W-FLUORESCENT-230V-GU10
1x35W-MR-HQI-Brite Spot 230V-GX10

DIC max 1x50W-12V-GU5.3
DIC max 1x50W-250V-GU10

DEVON 2



pag. 342 > 343


0,48 Kg - 1 lbs
foro 9,5 - Opening 3.3/4"




DEVON 2 - GU 5,3 - 50W 38°

Lux		
h	E max	E med
1.00	2228	1260
2.00	557	315
3.00	248	140
4.00	139	79
5.00	89	50


Gamma Angle



IP20 CE



IP43 CE cULus



max 1x7W-LED-230V-GU10
max 1x11W-FLUORESCENT-230V-GU10
1x35W-MR-HQI-Brite Spot 230V-GX10

DIC max 1x50W-12V-GU5.3
DIC max 1x50W-250V-GU10

DISK



pag. 326 > 327


1,1 Kg - 3 lbs
foro 9,5 - Opening 3.3/4"




DISK - GU 5,3 - 50W 38°

Lux		
h	E max	E med
1.00	2199	1309
2.00	550	327
3.00	244	145
4.00	137	82
5.00	88	52


Gamma Angle



IP20 CE



IP43 CE cULus



max 1x7W-LED-230V-GU10
max 1x11W-FLUORESCENT-230V-GU10
1x35W-MR-HQI-Brite Spot 230V-GX10

DIC max 1x50W-12V-GU5.3
DIC max 1x50W-250V-GU10

DROP



pag. 330 > 331


0,56 Kg - 1.5 lbs
foro 9,5 - Opening 3.3/4"




DROP - GU 5,3 - 50W 38°

Lux		
h	E max	E med
1.00	603	336
2.00	151	84
3.00	67	37
4.00	38	21
5.00	24	13


Gamma Angle



IP20 CE



IP43 CE cULus



max 1x7W-LED-230V-GU10
max 1x11W-FLUORESCENT-230V-GU10
1x35W-MR-HQI-Brite Spot 230V-GX10

DIC max 1x50W-12V-GU5.3
DIC max 1x50W-250V-GU10