

## EXTRUDO IN 330


Luminaire for recessed mounting in false ceilings for halogen and discharge lamps



Luminaire suitable for recessed mounting in false ceilings.

Recessed housing in mat black pre-galvanized steel complete with accessories for mounting in false ceilings. Housing in painted pre-galvanized steel. Diffuser in extra-clear transparent tempered flat glass. Screws for the lower glass in chromed brass. All the lamps with a 110 mm diameter can be rotated in all directions at 360° up to partially come out of the housing. Class I, IP20.

Version	Metallic grey housing	Socket type	Light beam width
QPAR-CB 111 up to 100 W	<b>301847</b>	GZ10	-
QR111 up to 100 W c/w trafo	<b>3018465</b>	G53	8° - 24° - 45°
HIR111 35 W c/w electronic ballast	<b>3018485</b>	GX8,5	10° - 24° - 40°

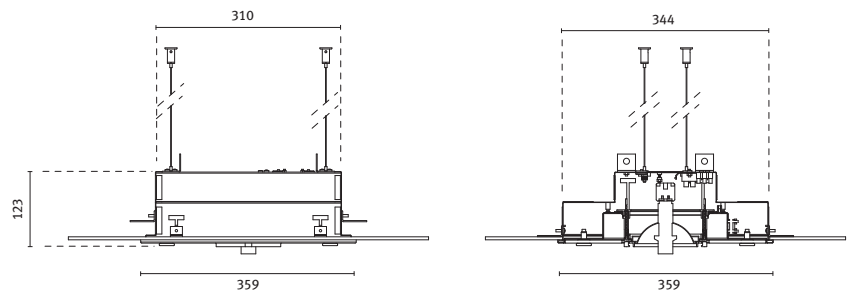

## EXTRUDO IN 660


Luminaire for recessed mounting in false ceilings for halogen and discharge lamps



Luminaire suitable for recessed mounting in false ceilings.

Recessed housing in mat black pre-galvanized steel complete with accessories for mounting in false ceilings. Housing in painted pre-galvanized steel. Diffuser in extra-clear transparent tempered flat glass. Screws for the lower glass in chromed brass. Individual switching of the lamps available. All the lamps with a 110 mm diameter can be rotated in all directions at 360° up to partially come out of the housing. Class I, IP20.

Version	Metallic grey housing	Socket type	Light beam width
QPAR-CB 111 2 x up to 100 W	<b>301851</b>	GZ10	-
QR111 2 x up to 100 W c/w trafo	<b>3018505</b>	G53	8° - 24° - 45°
HIR111 2 x 35 W c/w electronic ballast	<b>3018535</b>	GX8,5	10° - 24° - 40°

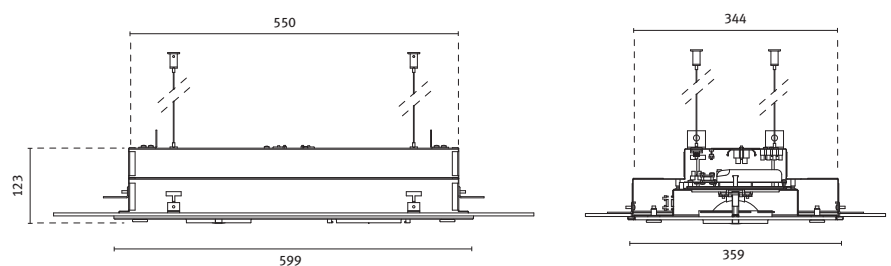

# EXTRUDO IN 650


Luminaire for recessed mounting in false ceilings for fluorescent lamps



Luminaire suitable for recessed mounting in false ceilings.

Recessed housing in mat black pre-galvanized steel complete with accessories for mounting in false ceilings. Housing in painted pre-galvanized steel. Diffuser in extra-clear transparent tempered flat glass. Screws for the lower glass in chromed brass. Individual switching of the lamps available. The fluorescent model comes with a polished reflector to direct the light beam. Class I, IP20.

Version	Metallic grey housing	Socket type	Light beam width
Fluorescent 2 x 24 W	<b>3018525</b>	G5	-

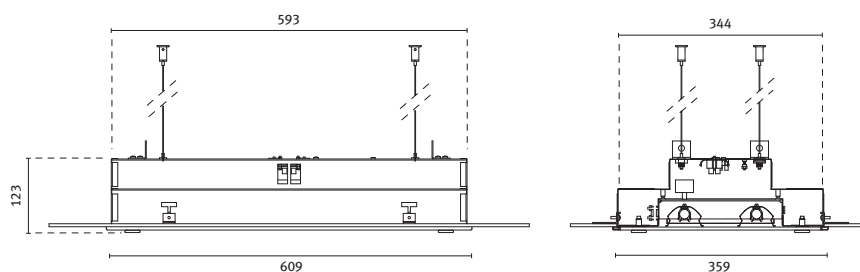

## Accessories (Please order separately!)

HIR111 - 35 W - 10°	<b>347001</b>
HIR111 - 35 W - 24°	<b>347002</b>
HIR111 - 35 W - 40°	<b>347003</b>
HIR111 - 70 W - 10°	<b>347004</b>
HIR111 - 70 W - 24°	<b>347005</b>
HIR111 - 70 W - 40°	<b>347006</b>
Reflector for T5 lamps 14-24 W	<b>310203</b>

HIR111 35W and 70W with light beam width of 10°, 24° and 40°.