

# Fronteluce IP66

Colour  29




**Fronteluce**  
Wall/Ceiling/Pendant or Pole Mounted luminaire

**Features**

- Extruded aluminium housing with Die cast aluminium end caps, Silicone gasket.
- Super pure anodized aluminium reflector.
- Tempered glass hinged to the housing, Breather device and Stainless steel external screws.
- Polyester powder paint resistant to outdoor atmospheric conditions.
- 4 Weather proof cable entries (2 for electrical and 2 for signal) for the purpose of cascade connection.
- Accessories for pendant/ surface mounted adjustable/ extendable arms in die cast aluminium and/ or steel.
- Modules in Dimmable versions are available upon request.
- IP66 rated.
- Designed and manufactured to comply to European standard EN 60598-1 and EN 60598-2-5.

**Applications**

- Fronteluce is functional and scene-controlled interactive graphic flood light system. With a flexible installation system for singular installation or in a continuous row, it can be oriented for light direction control. The simple shape is designed to enhance the architectural statement.
- Application areas: Building facades, under canopy, exterior or interior, residential or commercial.

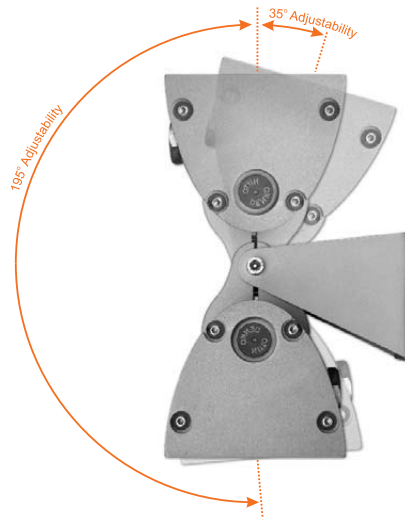

**Fronteluce LED RGB**

- 3195** With 36W 12 LED (Full color RGB)
- 3196** With 54W 18 LED (Full color RGB)
- 3197** With 72W 24 LED (Full color RGB)

Inclusive of Integral Control Unit with 220-240V 50/60Hz Electronic power supply and DMX signal converter with Male/Female In-Out cables for multiple connections. (Occupies 3 control channels.)

With a DMX switchboard that you can purchase separately from the market (or order our Art. 2975) you can control many more fittings, completely controlling scenes, speeds and color sequences.

IP66    IK07


**Fronteluce LED WHITE**

- 3198** With 36W (12x3W) LED White
- 3199** With 54W (18x3W) LED White
- 3200** With 72W (24x3W) LED White

White Leds colours in code 93(warm 3300K) or 95(cool 6800K), other colours on request. White Leds optics in code F(Flood) or NB(Narrow Beam), other optics on request.

Inclusive of Integral Electronic power supply gear 220-240V 50/60Hz.





IP66    IK07



ART.	L	Led Distance (A)
3195	674	50
3196	974	50
3197	1274	50
3198	674	50
3199	974	50
3200	1274	50




**Fronteluce**

- 3159** 14/24W T5 
- 3160** 21/39W T5 
- 3161** 28/54W T5 
- 3162** 35/80W T5 

Inclusive of Integral fluorescent electronic control gear 220-240V 50/60Hz. Fluorescent tube not included. To be ordered separately.


IP66    IK07



ART.	L
3159 (14w)	674
3159 (24w)	
3160 (21w)	974
3160 (39w)	
3161 (28w)	1274
3161 (54w)	
3162 (35w)	1574
3162 (80w)	



Colour  29

Accessories





**Mounting brackets**

**2379**  
(2pcs) Adjustable  
Available in colour 29





**Mounting brackets**

**2380**  
(2pcs) Adjustable  
Available in colour 29





**Mounting brackets**

**2381**  
(2pcs) Adjustable and Extendable  
Available in colour 29




**Suspension set**

**2382**  
With 2 wire hangers of 1500mm  
and a power supply cable  
Available in colour 29

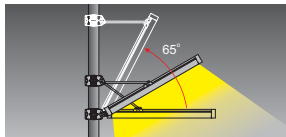


**Pole mounted bracket set with connector for one fixture**

**2394** Pole Dia. 102mm  
**2395** Pole Dia. 120mm  
Available in colour 29

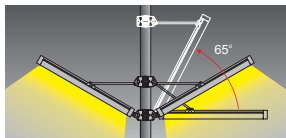


**Pole mounted bracket set with connector for two fixtures**

**2565** Pole Dia. 102mm  
**2566** Pole Dia. 120mm  
Available in colour 29

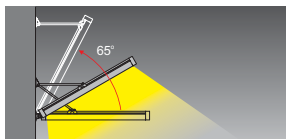


**Wall mounted set**

**2567**  
Available in colour 29

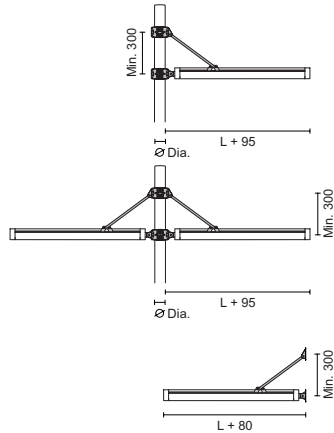



Colour  29

Accessories

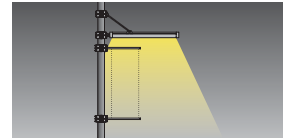


**Billboard set for one banner**

**2568** Pole Dia. 102mm  
**2569** Pole Dia. 120mm  
Available in colour 29

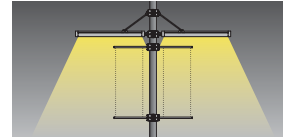

**Billboard set for two banners**


**2570** Pole Dia. 102mm  
**2571** Pole Dia. 120mm  
Available in colour 29



**DMX Switchboard**

**2975**  
**Power supply** : 220-240V 50/60Hz  
**Installation** : Plastic recessing box included  
**IP rate** : IP 40  
**Control signal** : DMX512  
**Control channel** : 60 channel

Programmable DMX switchboard that allows you to control 20 groups of individual fittings that requires 3 Control Channels. Every group for use of many fittings.



**IP65 Extension signal cable for RGB with M/F connector**

**2478** Length: 1000  
**2479** Length: 2000



**IP68 Fast Connector M20 (6 ÷ 12mm)**

**2577**

Easy relamping

