

# Galileo Due

Designed by **Franco Mirezzi**



## Related products:




**GALILEO**  
P.394-397



**GALILEO**  
Pendant/Wires  
P.376-379



**GALILEO**  
Pendant/Rods  
P.376-379

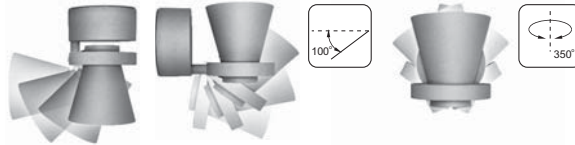

## Features

IP66


- Wall/Ceiling/Ground Floodlight.
- Made of die cast aluminium, with toughened safety glass, weatherproof durable silicone gasket and external screws made of stainless steel.
- Superior polyester powder paint resistant to outdoor atmospheric conditions.
- Front cover is designed to avoid accumulation of dust and water.
- Fixture is available in 2 design applications.
- Electrical installation option for single or double cable entries.
- Easy relamping via Allen screws.
- Light sources include Metal Halide and LED.
- Long life LED light source provide IR and UV free emission.
- Super pure aluminium reflector with different beam optics.
- Light head includes vertical and horizontal adjustability and mechanical locking system to ensure aiming stability.
- Designed and manufactured to comply with European standard EN 60598.

## Applications

- Mini Galileo Due is intended to be a projector-floodlight for outdoor architectural lighting; but it is also suitable for indoor area. Can be mounted on ground, ceiling and wall and the light emission can be directed and precisely adjusted and locked its setting to the required angle. Accessories available are internal anti-glare shield and visor glare shield cap to help to protect the environment from unpleasant bright light.
- Application areas: to illuminate buildings, landmarks, facades, big signboards, sculptures, trees and architectural element enhancement.



Colour



## Mini Galileo Due Wall

<b>3334</b>	35W	G12	CDM-T	M.H.		10°
<b>3368</b>	35W	G12	CDM-T	M.H.		40°
<b>3335</b>	70W	G12	CDM-T	M.H.		10°
<b>3369</b>	70W	G12	CDM-T	M.H.		40°
<b>3280</b>	150W	G12	CDM-T	M.H.		10°
<b>3370</b>	150W	G12	CDM-T	M.H.		40°

Inclusive of integral electronic control gear 220-240V 50/60Hz.


<b>3285-K30D45</b>	With 21x1W LED	3000K	1800lm		45°	LED
<b>3285-K40D45</b>	With 21x1W LED	4000K	2200lm		45°	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80.

Other beam optics or colour temperatures K or CRI are available upon request.



Floor



Ceiling



## Mini Galileo Due Ceiling/ Floor

<b>3319</b>	35W	G12	CDM-T	M.H.		10°
<b>3355</b>	35W	G12	CDM-T	M.H.		40°
<b>3320</b>	70W	G12	CDM-T	M.H.		10°
<b>3356</b>	70W	G12	CDM-T	M.H.		40°
<b>3321</b>	150W	G12	CDM-T	M.H.		10°
<b>3357</b>	150W	G12	CDM-T	M.H.		40°

Inclusive of integral electronic control gear 220-240V 50/60Hz.

<b>3289-K30D45</b>	With 21x1W LED	3000K	1800lm		45°	LED
<b>3289-K40D45</b>	With 21x1W LED	4000K	2200lm		45°	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz. CRI>80.

Other beam optics or colour temperatures K or CRI are available upon request.

## Accessories



**2593 Visor**

Available in colours 10, 29



**2595 Anti-glare shield**

Available in colour 10



**2577 IP68 Fast Connector M20**

(Ø 6 ±12mm)



**2322 Spike**

**2330 Spike**

H: 230

H: 235

In aluminium. The 50mm upper part must stay above ground level according to standards. Available in colour 10.