

TYCO 10

design Silvia Paola Pennacchio



TYCO die cast aluminium IP66 spot lights for halogen, dichroic and LED lamps suitable for indoor and outdoor applications. A compact and contemporary designed fitting manufactured from high quality materials and precision finishing. Ideal for highlighting and architectural feature / effect lighting, museums, sculptures, galleries, retail, showrooms, gardens and parks etc. TYCO are available in two sizes:

- Tyco 10, suitable for lamp types (maximum); 50W halogen, 50W dichroic and 3x1W LED.
- Tyco 20, suitable for lamp types (maximum); 150W metal halide and 75W halogen.

- Body, frame and control gear box in chromate pre treated corrosion resistant die cast painted aluminium grey or matt black.
- Toughened safety glass.
- Reflector in high purity 99.85% aluminium anodized and polished.
- Gasket locating ring in technopolymer, resistant to very high temperatures.
- Silicone gaskets
- Internal Teflon / silicone sheathed cables.
- Cable entry Ø7-10mm-2x1-1.5mm²
- Stainless steel external screws.

TYCO 10



TYCO 12




TYCO 14



TYCO 15



TYCO 13

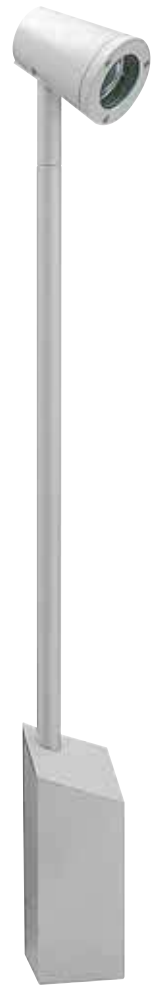

Tyco offers a solution to a variety of applications with the following versions:

- Tyco 10
- Tyco 12
- Tyco 13
- Tyco 14
- Tyco 15

Tyco LED versions are non-UV transmitting and minimum heat radiated fittings making them particularly useful for areas sensitive to UV and heat e.g. galleries, paintings, artwork, museums, ancient artefacts etc.

Tyco 10/51 - 12/51 - 14/51 - 13/51 models are complete with self adjustable lamp positioning for wide to narrow beam light distributions.

TYCO 14-15

				Tyco 14 IK 05 2J	Tyco 15 IK 05 0,7J	 max0,55kg				
CLASS II		CLASS III		81 94	IP 20		HRGS Max 50W GZ10	HRGS Max 50W GU5,3	HSGS Max 50W GY6,35	LED Max 3x1,4W
 max 175 Tyco 14 kg = 0,45 max	 max 225 Tyco 15 kg = 0,55 max	 350°								 Min 80 mm




TYCO 14 Low voltage track fixing 12V

Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GU5,3	max 50W/12V	HRGS			81	III				• 01029581	!
GU5,3	max 50W/12V	HRGS			94	III				• 01020594	!
GY6,35	max 50W/12V	HSGS		C	81	III				• 01029681	!
GY6,35	max 50W/12V	HSGS		C	94	III				• 01020694	!

! Models less transformer require 12V supply.

Models complete with self adjustable lamp, in three positions, for wide to narrow beam light distributions.

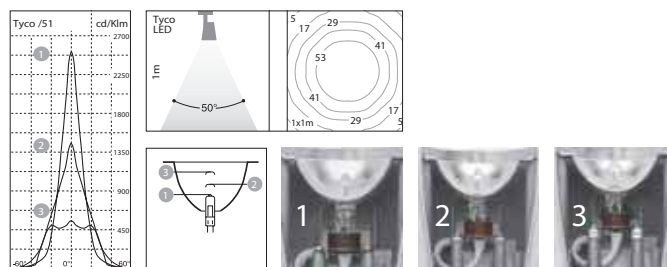

TYCO 15 Low voltage track fixing 230V

Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GZ10	max 50W	HRGS			81	II				• 01029781	!
GZ10	max 50W	HRGS			94	II				• 01020794	!
N.3 led 350mA	4,2W			○ 6,000°	C 45°	81	II	ETRC		• 06010181	
N.3 led 350mA	4,2W			○ 6,000°	C 45°	94	II	ETRC		• 06009894	

Complete with electronic ballast non dimmable 95-240v 50/60hz.

! Models for mains voltage supply 220-240V

