

# TYCO 10

design Silvia Paola Pennacchio



TYCO die cast aluminium IP66 spot lights for halogen, dichroic and LED lamps suitable for indoor and outdoor applications. A compact and contemporary designed fitting manufactured from high quality materials and precision finishing. Ideal for highlighting and architectural feature / effect lighting, museums, sculptures, galleries, retail, showrooms, gardens and parks etc. TYCO are available in two sizes:

- Tyco 10, suitable for lamp types (maximum); 50W halogen, 50W dichroic and 3x1W LED.
- Tyco 20, suitable for lamp types (maximum); 150W metal halide and 75W halogen.

- Body, frame and control gear box in chromate pre treated corrosion resistant die cast painted aluminium grey or matt black.
- Toughened safety glass.
- Reflector in high purity 99.85% aluminium anodized and polished.
- Gasket locating ring in technopolymer, resistant to very high temperatures.
- Silicone gaskets
- Internal Teflon / silicone sheathed cables.
- Cable entry Ø7-10mm-2x1-1.5mm<sup>2</sup>
- Stainless steel external screws.

TYCO 10



TYCO 12




TYCO 14



TYCO 15



TYCO 13

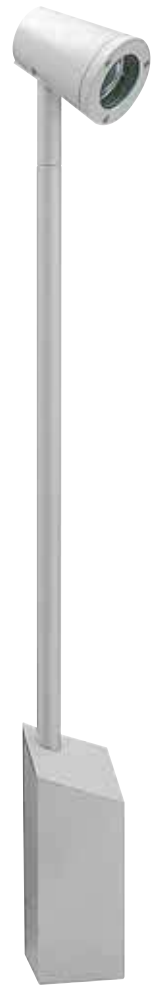

Tyco offers a solution to a variety of applications with the following versions:

- Tyco 10
- Tyco 12
- Tyco 13
- Tyco 14
- Tyco 15

Tyco LED versions are non-UV transmitting and minimum heat radiated fittings making them particularly useful for areas sensitive to UV and heat e.g. galleries, paintings, artwork, museums, ancient artefacts etc.

Tyco 10/51 - 12/51 - 14/51 - 13/51 models are complete with self adjustable lamp positioning for wide to narrow beam light distributions.

				IK 07 2J					
CLASS II		CLASS III		81 94	IP 66		HRGS Max 50W GZ10	HRGS Max 50W GU5,3	HSGS Max 50W GY6,35



### TYCO 13 Complete with steel spike

Lampholder	W	lcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GU5,3	max 50W/12V	HRGS			81	III				• <b>01029281</b>	!1
GU5,3	max 50W/12V	HRGS			94	III				• <b>01021194</b>	!1
GY6,35	max 50W/12V	HSGS		C	81	III				• <b>01029381</b>	!1
GY6,35	max 50W/12V	HSGS		C	94	III				• <b>01021294</b>	!1
GZ10	max 50W	HRGS			81	II				• <b>01029481</b>	!2
GZ10	max 50W	HRGS			94	II				• <b>01021394</b>	!2
GU5,3	max 50W/12V	HRGS			81	II	ETRC			• <b>04017881</b>	T
GU5,3	max 50W/12V	HRGS			94	II	ETRC			• <b>04012394</b>	T
GY6,35	max 50W/12V	HSGS		C	81	II	ETRC			• <b>04017981</b>	T
GY6,35	max 50W/12V	HSGS		C	94	II	ETRC			• <b>04012494</b>	T

**T** Complete with electronic transformer non dimmable 230v 50/60hz.

**!1** Models less transformer require 12V supply.

**!2** Models for mains voltage lamp versions.

Models complete with self adjustable lamp, in three positions, for wide to narrow beam light distributions.

Tyco 13 ground mounted spot light suitable for small architectural detail and feature lighting, gardens, and pathways etc.

Tyco 13 painted aluminium grey


- Wiring box / ground mounting base unit suitable for through wiring connection.

- Tubular aluminium arm and die cast aluminium body.

- Supplied complete with hot dipped galvanised stainless steel spike for ground or concrete installation.

- A0276 ground mounting plate accessory.

### ACCESSORIES

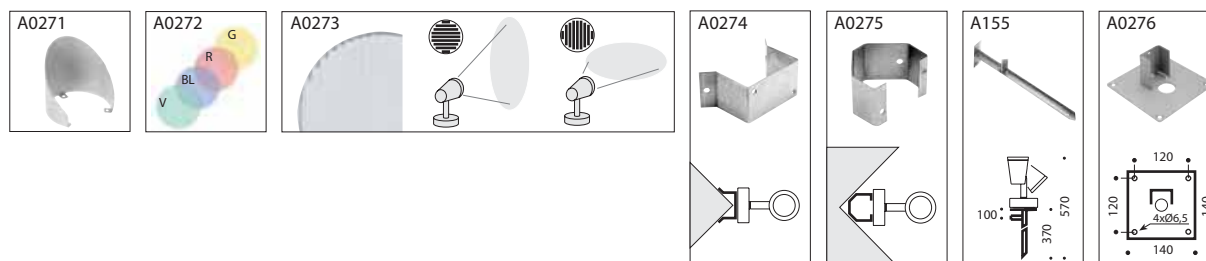

Code	Denomination	Colour	Description
<b>14048381</b>	A0271	81	External aluminium cowl finished polyester painted matt black.
<b>14037894</b>	A0271	94	External aluminium cowl finished polyester painted aluminium grey.
<b>14037920</b>	A0272	R	Internal dichroic colour filters (not suitable for TYCO GZ10 lamp or use with A0273 accessory).
<b>14038020</b>	A0272	G	Internal dichroic colour filters (not suitable for TYCO GZ10 lamp or use with A0273 accessory).
<b>14038120</b>	A0272	V	Internal dichroic colour filters (not suitable for TYCO GZ10 lamp or use with A0273 accessory).
<b>14038220</b>	A0272	BL	Internal dichroic colour filters (not suitable for TYCO GZ10 lamp or use with A0273 accessory).
<b>14038320</b>	A0273		Internal prismatic glass rotates through 180° to give oval light distribution (not suitable for TYCO GZ10 lamp or use with A0273 accessory).
<b>14038404</b>	A0274	04	AISI 304 stainless steel bracket for external 90° corner mounting (not suitable for TYCO 13, 14 and 15).
<b>14038504</b>	A0275	04	AISI 304 stainless steel bracket for internal 90° corner mounting (not suitable for TYCO 13, 14 and 15).
<b>14040936</b>	A155		TYCO 10/12 galvanised steel spike for ground installation.
<b>14048481</b>	A0276	81	TYCO 13 stainless steel ground mounting plate finished polyester painted matt black.
<b>14038694</b>	A0276	94	TYCO 13 stainless steel ground mounting plate finished polyester painted aluminium grey.